


NEWS 2023

Technical data


ARKOSLIGHT

Black Foster Custom Trimless
Black Foster Recessed 2x2
Shot Light
Lens Light
Black Foster Micro Surface
Loop
Rec Slim & Micro
Yoru Spike
Minimal Track Trimless
Track 48V Indirect Light
Wiz 48V
Trimless Tool
Fit Surface 65 & 80
Fit 27 24V
Black Foster Recessed White
Minimal Track White
Line Micro 24V White
Line 48V White


BLACK FOSTER Custom Trimless 1m	A458-01-00- N
BLACK FOSTER Custom Trimless 2m	A458-02-00- N
BLACK FOSTER Custom Trimless 3m	A458-03-00- N

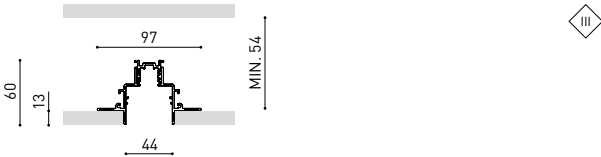


BLACK FOSTER Custom Trimless	A458-04-00- N
L-Joint	

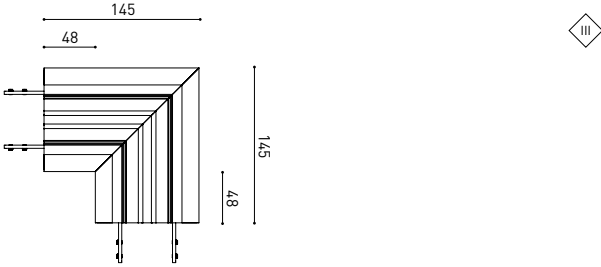

BLACK FOSTER Custom Cover Gap 250	A452-00-01- N	250mm
BLACK FOSTER Custom Cover Gap 500	A452-00-02- N	500mm




BLACK FOSTER Custom Trimless	A458-05-00
Plaster Installation Guard 1m	

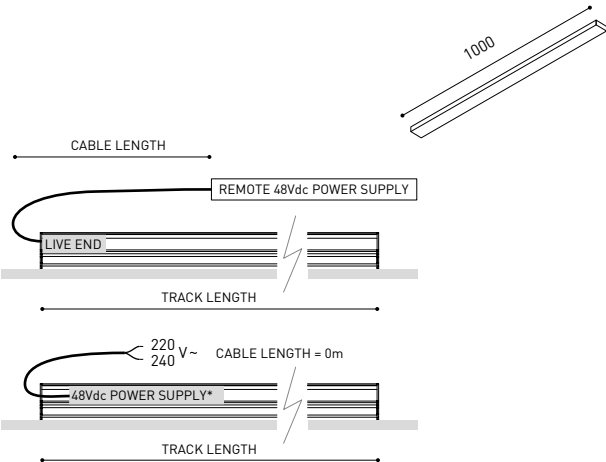

		P	V	D [A x B x C]
CONSTANT VOLTAGE LED POWER SUPPLY	0434-01-61* N	100W	48V	298 x 19 x 16mm
	0434-01-62	150W	48V	350 x 30 x 18mm

220/240 V~ | *To be installed inside the track.

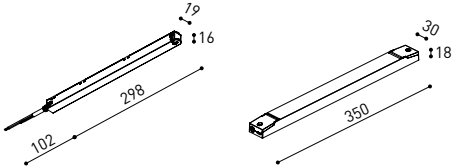

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		50	50	X	X
100	0,75	50	50	X	25
	1,5	40	15	X	X
150	0,75	50	40	20	X
	1,5				

COLOUR | N ■ |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

» PLEASE CONSULT



BLACK FOSTER Custom Trimless End

A458-00-01- | N |

Cover Thickness = 2 mm.



BLACK FOSTER Custom Trimless End Feed

A458-00-02- | N |

Cover Thickness = 2 mm.




BLACK FOSTER Straight Joiner

A317-00-06




Live-End Connector 48V

A338-00-01- | N |




L-Joint Connector 48V

A338-00-12- | N |



Central Connector 48V

A338-00-02- | N |



MOUNTING ACCESSORIES

Track Fixation Kit

A219-21-06- | B |



Track Flush Ceiling Kit

A219-22-06- | B |




Track Clamp Kit for M6 ROD

A219-21-21- | B |



Track Suspension Kit

A219-21-10- | B |



SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000 mm - 2 Pcs


2000 mm - 2 Pcs

3000 mm - 3 Pcs

COLOUR | N ■ | B □ |

>> MORE INFO

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED
 BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

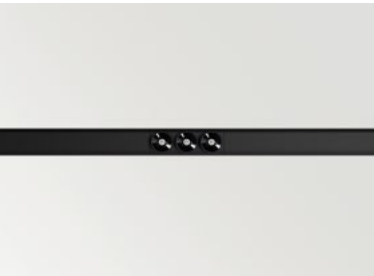

>> MORE INFO


		P	CCT	I	Flux
BLACK FOSTER Custom Module 3	A453-3- ○ - Ⓢ -0- N NMG	6,3W	2700K	700mA	570 lm
	A453-3- ○ - Ⓢ -1- N NMG	6,3W	3000K	700mA	630 lm
	A453-3- ○ - Ⓢ -2- N NMG	6,3W	4000K	700mA	750 lm
BLACK FOSTER Custom Module 5	A453-4- ○ - Ⓢ -0- N NMG	10,5W	2700K	700mA	950 lm
	A453-4- ○ - Ⓢ -1- N NMG	10,5W	3000K	700mA	1050 lm
	A453-4- ○ - Ⓢ -2- N NMG	10,5W	4000K	700mA	1250 lm
BLACK FOSTER Custom Module 10	A453-5- ○ - Ⓢ -0- N NMG	21W	2700K	700mA	1900 lm
	A453-5- ○ - Ⓢ -1- N NMG	21W	3000K	700mA	2100 lm
	A453-5- ○ - Ⓢ -2- N NMG	21W	4000K	700mA	2500 lm

48 V | Ⓢ IP20 | CRI>90 | L80B10 > 60.000 h



○	BEAM	LOR
0	38°	92%
1	19°	90%

Ⓢ	*OPTIONS
1	No DIM
2	DIM DALI

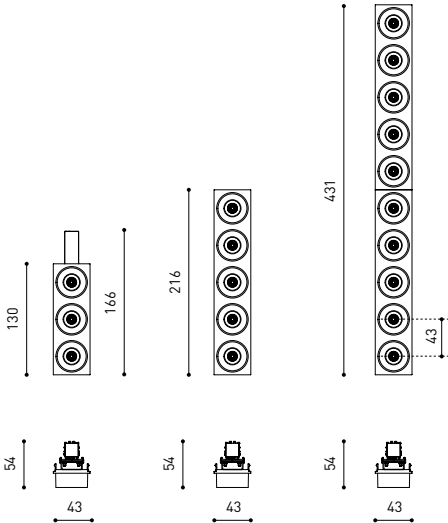

COLOUR | N ■ | NMG ■ | MATERIAL | AL | ABS+PC |

Ⓢ » PLEASE CONSULT



>> MORE INFO


		P	CCT	I	Flux
BLACK FOSTER Custom Module FIT 27	A454-0- - -0- WT NT G	5,5W	2700K	500mA	550 lm
	A454-0- - -1- WT NT G	5,5W	3000K	500mA	600 lm
	A454-0- - -2- WT NT G	5,5W	4000K	500mA	640 lm

48 V | IP20 | CRI>90 | L80B10
> 60.000 h



	BEAM	LOR
1	22°	84%
2	37°	82%
3	46°	81%

	*OPTIONS
1	No DIM
2	DIM DALI

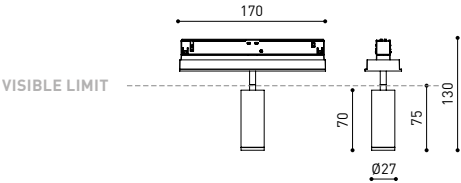

COLOUR | WT | NT | G | MATERIAL | AL | PC |

» PLEASE CONSULT



>> MORE INFO




>> MORE INFO



>> MORE INFO

		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 1	A319-10- 0-0- N W WN NMG	2,1W	2700K	38°	700mA	190 lm	92%
	A319-10- 0-1- N W WN NMG	2,1W	3000K	38°	700mA	210 lm	92%
	A319-10- 0-2- N W WN NMG	2,1W	4000K	38°	700mA	250 lm	92%
	A319-11- 0-0- N WN NMG	2,1W	2700K	19°	700mA	190 lm	90%
	A319-11- 0-1- N WN NMG	2,1W	3000K	19°	700mA	210 lm	90%
	A319-11- 0-2- N WN NMG	2,1W	4000K	19°	700mA	250 lm	90%

220
240 V~ | IP20 | CRI>90 | L80B10 > 60.000 h



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 2	A319-20- 0-0- N W WN NMG	4,2W	2700K	38°	700mA	380 lm	92%
	A319-20- 0-1- N W WN NMG	4,2W	3000K	38°	700mA	420 lm	92%
	A319-20- 0-2- N W WN NMG	4,2W	4000K	38°	700mA	500 lm	92%
	A319-21- 0-0- N WN NMG	4,2W	2700K	19°	700mA	380 lm	90%
	A319-21- 0-1- N WN NMG	4,2W	3000K	19°	700mA	420 lm	90%
	A319-21- 0-2- N WN NMG	4,2W	4000K	19°	700mA	500 lm	90%

220
240 V~ | IP20 | CRI>90 | L80B10 > 60.000 h



		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 3	A319-30- 0-0- N W WN NMG	6,3W	2700K	38°	700mA	570 lm	92%
	A319-30- 0-1- N W WN NMG	6,3W	3000K	38°	700mA	630 lm	92%
	A319-30- 0-2- N W WN NMG	6,3W	4000K	38°	700mA	750 lm	92%
	A319-31- 0-0- N WN NMG	6,3W	2700K	19°	700mA	570 lm	90%
	A319-31- 0-1- N WN NMG	6,3W	3000K	19°	700mA	630 lm	90%
	A319-31- 0-2- N WN NMG	6,3W	4000K	19°	700mA	750 lm	90%


220
240 V~ | IP20 | CRI>90 | L80B10 > 60.000 h



Ⓢ *OPTIONS

1	No DIM
2	DIM Push
4	DIM DALI

DIM PHASE CUT PLEASE CONSULT

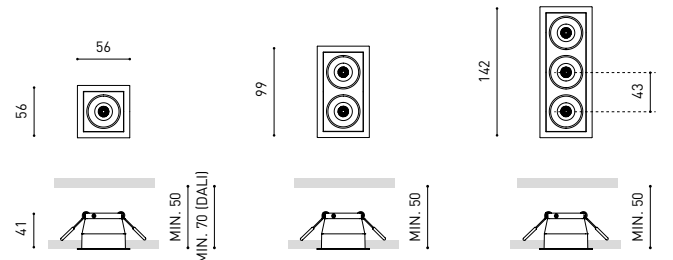

COLOUR | N ■ | W □ | WN ■ | NMG ■

MATERIAL | AL | ABS+PC

"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N, WN & NMG COLOURS

Ⓢ & >> PLEASE CONSULT



>> MORE INFO



>> MORE INFO

		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 5	A319-40- -0- N W WN NMG	10,5W	2700K	38°	700mA	950 lm	92%
	A319-40- -1- N W WN NMG	10,5W	3000K	38°	700mA	1050 lm	92%
	A319-40- -2- N W WN NMG	10,5W	4000K	38°	700mA	1250 lm	92%
	A319-41- -0- N WN NMG	10,5W	2700K	19°	700mA	950 lm	90%
	A319-41- -1- N WN NMG	10,5W	3000K	19°	700mA	1050 lm	90%
	A319-41- -2- N WN NMG	10,5W	4000K	19°	700mA	1250 lm	90%

220
240 V~ | **IP20** | **CRI>90** | **L80B10**
>60.000 h




		P	CCT	Beam	I	Flux	LOR
BLACK FOSTER Recessed 2x2	A319-50- -0- N W WN	8,4W	2700K	38°	700mA	760 lm	92%
	A319-50- -1- N W WN	8,4W	3000K	38°	700mA	840 lm	92%
	A319-50- -2- N W WN	8,4W	4000K	38°	700mA	1000 lm	92%
	A319-51- -0- N WN	8,4W	2700K	19°	700mA	760 lm	90%
	A319-51- -1- N WN	8,4W	3000K	19°	700mA	840 lm	90%
	A319-51- -2- N WN	8,4W	4000K	19°	700mA	1000 lm	90%

220
240 V~ | **IP20** | **CRI>90** | **L80B10**
>60.000 h



	*OPTIONS
1	No DIM
2	DIM Push
4	DIM DALI

DIM PHASE CUT PLEASE CONSULT

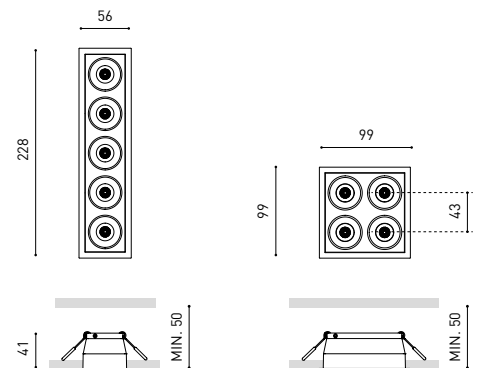



>> MORE INFO

			P	CCT	Beam	I	Flux	LOR
SHOT LIGHT S	A462-0- ∅ -00- N NMG WMG		6W	2700K	18°	500mA	640 lm	89%
	A462-0- ∅ -01- N NMG WMG		6W	3000K	18°	500mA	670 lm	89%
	A462-0- ∅ -02- N NMG WMG		6W	4000K	18°	500mA	720 lm	89%
	A462-0- ∅ -10- N NMG WMG		6W	2700K	40°	500mA	640 lm	89%
	A462-0- ∅ -11- N NMG WMG		6W	3000K	40°	500mA	670 lm	89%
	A462-0- ∅ -12- N NMG WMG		6W	4000K	40°	500mA	720 lm	89%

220
240 V~ |  IP20 | CRI>90 | L80B10
> 60.000 h



			P	CCT	Beam	I	Flux	LOR
SHOT LIGHT S IP65	A462-1- ∅ -10- N W NMG WMG		5W	2700K	40°	500mA	640 lm	84%
	A462-1- ∅ -11- N W NMG WMG		5W	3000K	40°	500mA	670 lm	84%
	A462-1- ∅ -12- N W NMG WMG		5W	4000K	40°	500mA	720 lm	84%


220
240 V~ |  IP65 | CRI>90 | L80B10
> 60.000 h



∅ *OPTIONS

1	No DIM
2	DIM DALI
3	DIM Push

DIM PHASE CUT PLEASE CONSULT

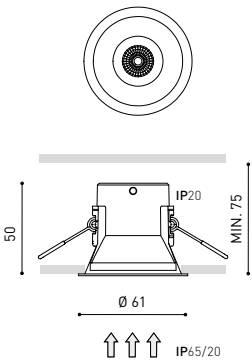



>> MORE INFO

		P	CCT	Beam	I	Flux	LOR
SHOT LIGHT S Trimless	A463-0- -00- N NMG	6W	2700K	18°	500mA	640 lm	89%
	A463-0- -01- N NMG	6W	3000K	18°	500mA	670 lm	89%
	A463-0- -02- N NMG	6W	4000K	18°	500mA	720 lm	89%
	A463-0- -10- N W NMG	6W	2700K	40°	500mA	640 lm	89%
	A463-0- -11- N W NMG	6W	3000K	40°	500mA	670 lm	89%
	A463-0- -12- N W NMG	6W	4000K	40°	500mA	720 lm	89%

220
240 V~ | **IP20** | **CRI>90** | **L80B10**
>60.000 h



***OPTIONS**



1	No DIM
2	DIM DALI
3	DIM Push

DIM PHASE CUT PLEASE CONSULT

ACCESSORY

SHOT LIGHT S Trimless Accessory A463-00-00**

** MANDATORY FOR INSTALLATION



COLOUR | **N** | **W** | **NMG**

MATERIAL | **AL** | **ABS+PC** |

"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N & NMG COLOURS

& » PLEASE CONSULT




>> MORE INFO

		P	CCT	I	Flux	LOR
LENS LIGHT	A469-0- Ⓞ -00- N W	5,7W	2700K	500mA	510 lm	82%
	A469-0- Ⓞ -01- N W	5,7W	3000K	500mA	540 lm	82%
	A469-0- Ⓞ -02- N W	5,7W	4000K	500mA	580 lm	82%

220
240 V~ |  IP20 | CRI>90 | L80B10 > 60.000 h



Ⓞ	*OPTIONS
1	No DIM
2	DIM DALI
3	DIM Push

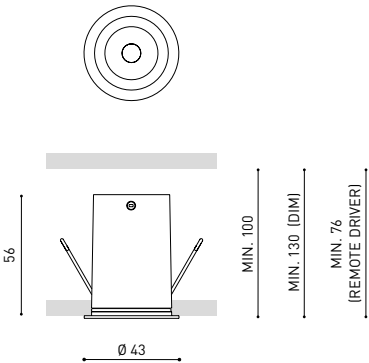

COLOUR | N ■ | W □ | MATERIAL |  AL |  ABS+PC |

*OTHER DIM OPTIONS PLEASE CONSULT
COLOURS MAY AFFECT THE LIGHTING PARAMETERS

 &  >> PLEASE CONSULT



>> MORE INFO

		P	CCT	I	Flux	LOR
LENS LIGHT Trimless	A470-0- 00- N W	5,7W	2700K	500mA	510 lm	82%
	A470-0- 01- N W	5,7W	3000K	500mA	540 lm	82%
	A470-0- 02- N W	5,7W	4000K	500mA	580 lm	82%

220
240 V~ | IP20 | CRI>90 | L80B10
>60.000 h






00 *OPTIONS

1	No DIM
2	DIM DALI
3	DIM Push

ACCESSORY

LENS LIGHT Trimless Accessory** A470-00-00

** MANDATORY FOR INSTALLATION

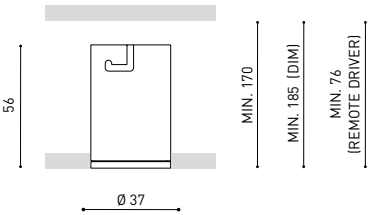


COLOUR | N ■ | W □ |

MATERIAL | AL | ABS+PC |

*OTHER DIM OPTIONS PLEASE CONSULT
COLOURS MAY AFFECT THE LIGHTING PARAMETERS

» PLEASE CONSULT

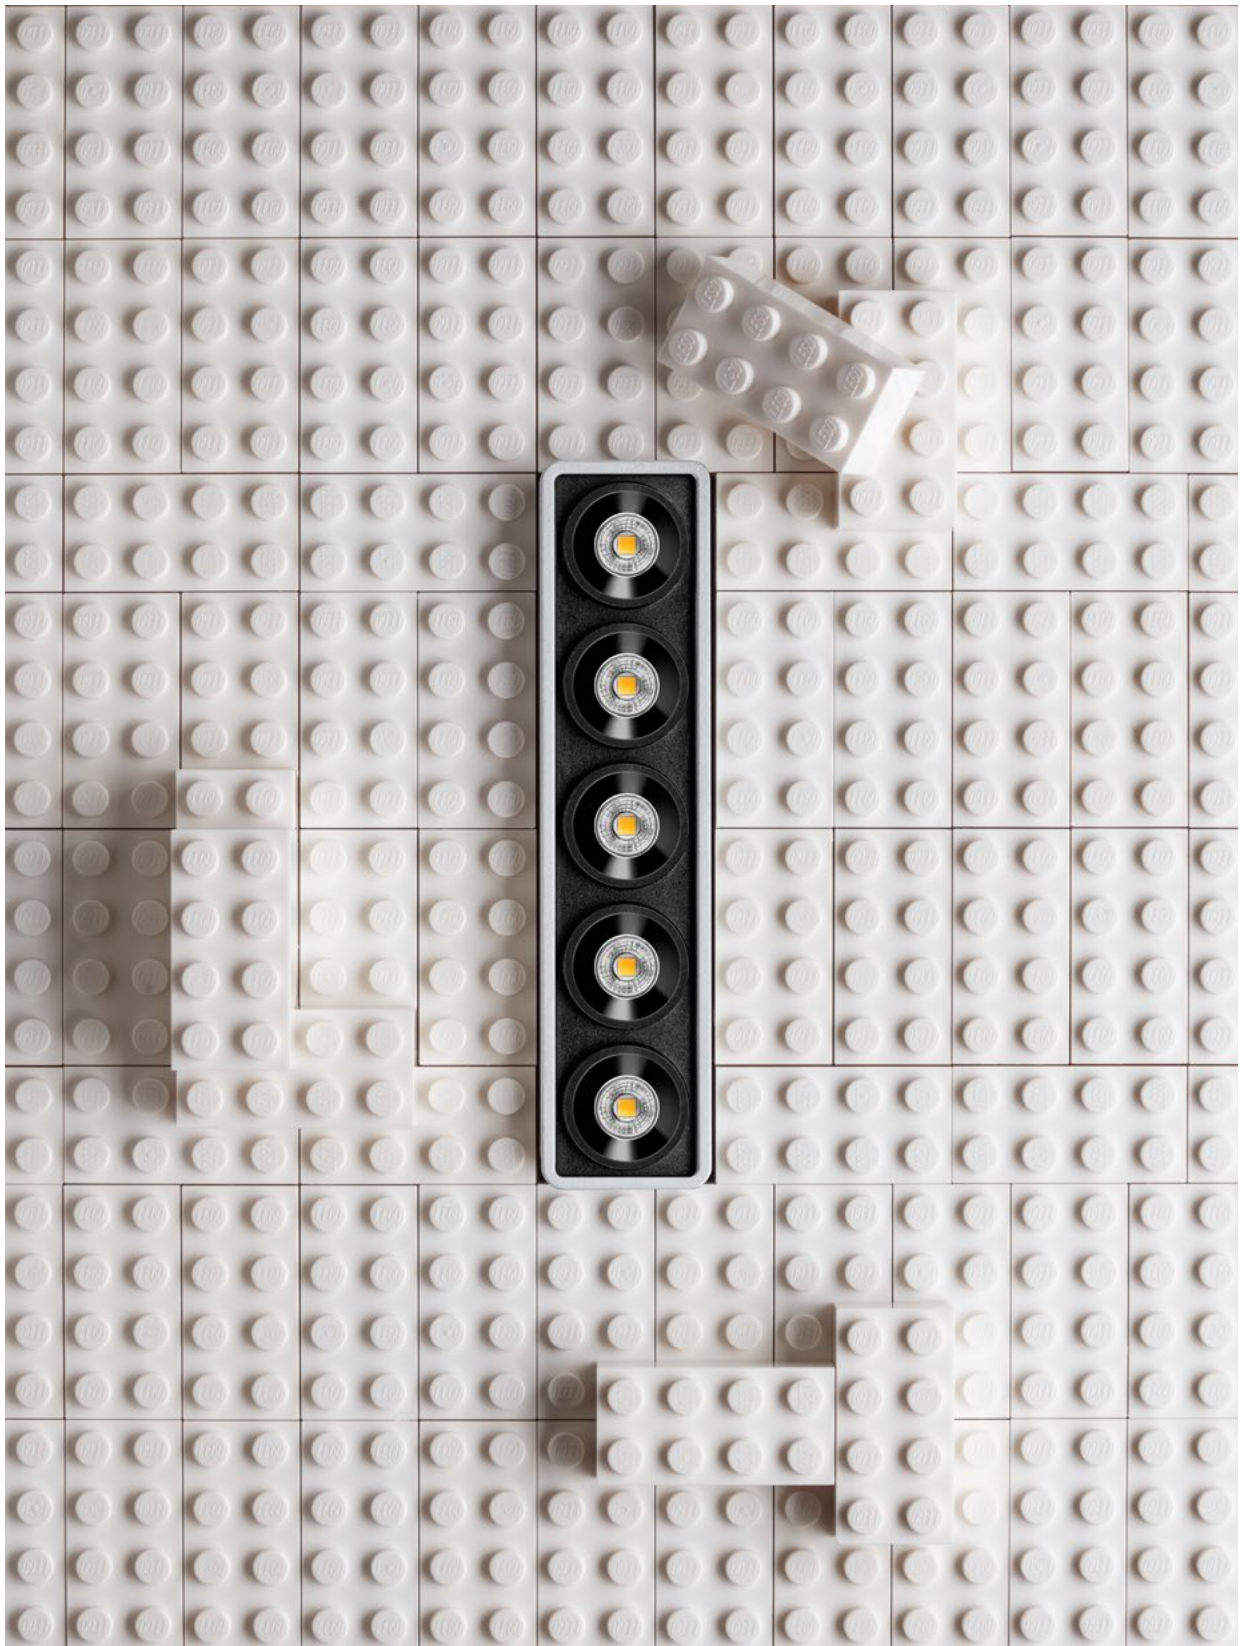



>> MORE INFO



>> MORE INFO



>> MORE INFO

		P	CCT	I	Flux	LOR
BLACK FOSTER MICRO Surface 5	A459-20-00- NT WT	7W	2700K	500mA	775 lm	87%
	A459-20-01- NT WT	7W	3000K	500mA	800 lm	87%
	A459-20-02- NT WT	7W	4000K	500mA	850 lm	87%

III IP20 | CRI>90 | L90B10
>60.000h



		P	CCT	I	Flux	LOR
BLACK FOSTER MICRO Surface 2x2	A459-30-00- NT WT	5,6W	2700K	500mA	620 lm	87%
	A459-30-01- NT WT	5,6W	3000K	500mA	640 lm	87%
	A459-30-02- NT WT	5,6W	4000K	500mA	680 lm	87%

III IP20 | CRI>90 | L90B10
>60.000h




		P	CCT	I	Flux	LOR
BLACK FOSTER MICRO Surface 3x3	A459-40-00- NT WT	10W	2700K	400mA	1170 lm	87%
	A459-40-01- NT WT	10W	3000K	400mA	1200 lm	87%
	A459-40-02- NT WT	10W	4000K	400mA	1300 lm	87%

III IP20 | CRI>90 | L90B10
>60.000h



*DRIVER OPTIONS		Black Foster Micro Surface 5	Black Foster Micro Surface 2x2	Black Foster Micro Surface 3x3
ON/OFF	0434-00-42	1 to 2	1 to 3	
	0434-01-53			1
DALI	0434-00-44	1 to 3	1 to 3	
	0434-01-54			1

220 V~ | DRIVER MUST BE PLACED ON REMOTE
240

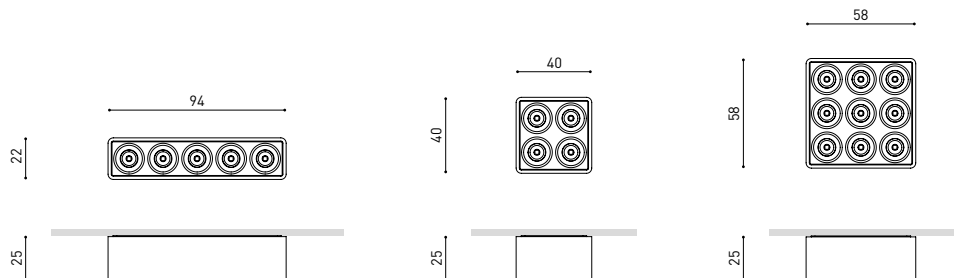

COLOUR | NT ■ | WT □ | MATERIAL | AL | ABS+PC |

* OTHER DIM OPTIONS PLEASE CONSULT

» PLEASE CONSULT





>> MORE INFO

⌘ *OPTIONS

1	No DIM
2	DIM DALI
3	DIM Push

FINISHING **

Lamp	Cable	Base
N ■	N ■	NT ■
BG ■	N ■	NT ■

		P	CCT	I	Flux	LOR
LOOP	A473-10- ⌘ -0- N BG	26,5W	2700K	700mA	2800 lm	38%
	A473-10- ⌘ -1- N BG	26,5W	3000K	700mA	3060 lm	38%

220 V~ | IP20 | CRI>90 | L80B10 > 60.000h



LOOP Base	A473-20- ⌘ -0- N BG	26,5W	2700K	700mA	2800 lm	38%
	A473-20- ⌘ -1- N BG	26,5W	3000K	700mA	3060 lm	38%

220 V~ | IP20 | CRI>90 | L80B10 > 60.000h




LOOP Indirect	A474-10- ⌘ -0- N BG	26,5W	2700K	700mA	2800 lm	38%
	A474-10- ⌘ -1- N BG	26,5W	3000K	700mA	3060 lm	38%

220 V~ | IP20 | CRI>90 | L80B10 > 60.000h



LOOP Indirect Base	A474-20- ⌘ -0- N BG	26,5W	2700K	700mA	2800 lm	38%
	A474-20- ⌘ -1- N BG	26,5W	3000K	700mA	3060 lm	38%

220 V~ | IP20 | CRI>90 | L80B10 > 60.000h

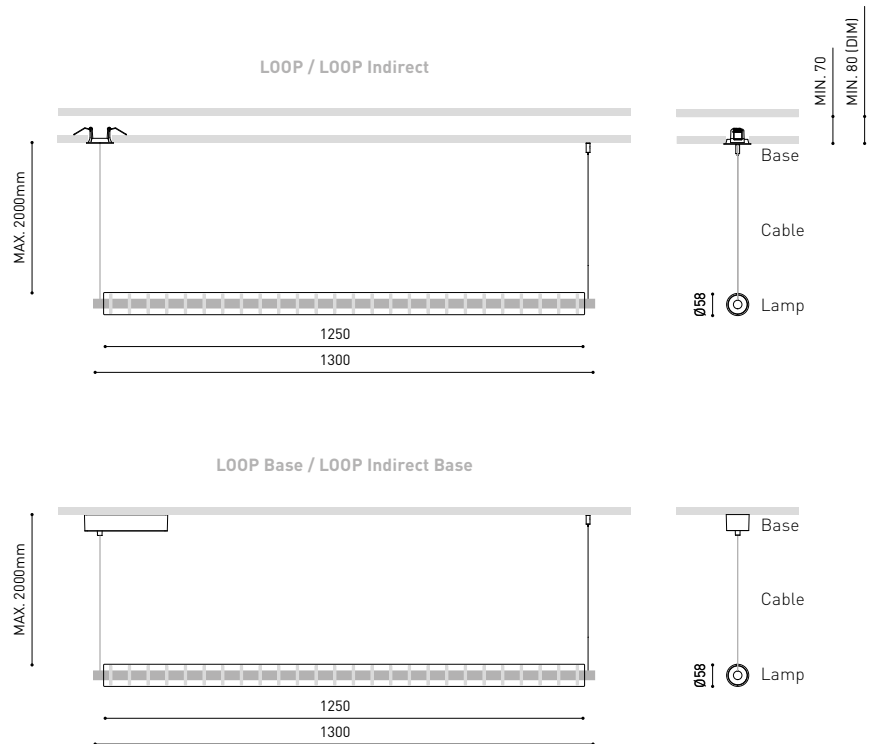

COLOUR | N ■ | NT ■ | BG ■ | MATERIAL | OPTICAL GLASS | OPTICAL PMMA | AL | ABS+PC |

* OTHER DIM OPTIONS | ** OTHER FINISHING COMBINATIONS » PLEASE CONSULT

» PLEASE CONSULT





>> MORE INFO



>> MORE INFO

		P	CCT	I	Flux	LOR
REC Slim	A457-00- 00 -0- WT NT PR	27W	2700K	700mA	3700 lm	86%
	A457-00- 00 -1- WT NT PR	27W	3000K	700mA	3800 lm	86%
	A457-00- 00 -2- WT NT PR	27W	4000K	700mA	4000 lm	86%

220 V~ | IP20 | CRI>90 | L80B10 > 60.000h



00 *OPTIONS

1	No DIM
2	DIM DALI
3	DIM Push

		CCT	LOR
REC Micro	A461-00-00- WT NT PR	2700K	79%
	A461-00-01- WT NT PR	3000K	79%
	A461-00-02- WT NT PR	4000K	79%


IP20 | CRI>90 | L80B10 > 60.000h




*DRIVER OPTIONS	P	I	CCT	Flux
0434-00-40 1 to 2 Rec Micro	12,8W	700mA	2700K	1465 lm
			3000K	1560 lm
			4000K	1650 lm
0434-01-43 1 to 3 Rec Micro	12,8W	700mA	2700K	1465 lm
			3000K	1560 lm
			4000K	1650 lm
0434-00-46 1 to 2 Rec Micro	12,8W	700mA	2700K	1465 lm
			3000K	1560 lm
			4000K	1650 lm
0434-01-25 1 to 3 Rec Micro	12,8W	700mA	2700K	1465 lm
			3000K	1560 lm
			4000K	1650 lm

220 V~ | DRIVER MUST BE PLACED ON REMOTE

REC Slim



REC Micro



COLOUR | WT | NT | PR

MATERIAL | AL | PMMA |

PR: PRIMER COATING FINISHING

» PLEASE CONSULT





>> MORE INFO

		P	CCT	Flux	LOR
YORU Spike 24V	A475- -0 - 00- WT NT	3W	2700K	400 lm	84%
	A475- -0 - 01- WT NT	3W	3000K	410 lm	84%

24 V | **IP65** | CRI>90 | L80B10 >60.000 h





TOTAL HEIGHT - H	
1	400 mm
2	500 mm

OPTIONAL ACCESSORY


Connector IP67	0434-01-67 N
Connector IP67 T-Shape	0434-01-68 N

For cable Ø3,5-7,5mm, section <1,5mm²

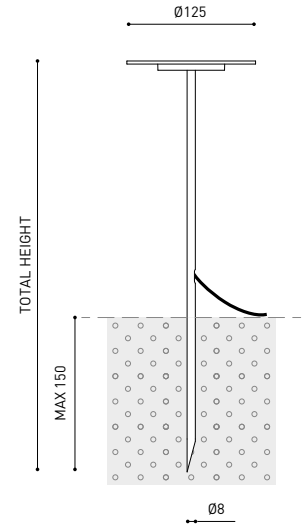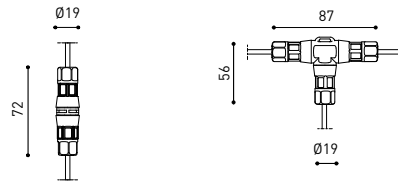


			P	V	D (A x B x C)
YORU Spike 24V	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
** Remote Power Supply		0433-10-22	100W	24V	295 x 43 x 30mm

220 V~ | **IP20**



YORU Spike 24V		0433-01-32	DALI / Push	24V	181 x 42 x 20mm
* Remote Constant Voltage Dimmer		0433-01-33	CASAMBI	24V	172 x 42 x 20mm
		0434-01-64	WIFI	24V	105 x 44 x 23mm

24 V | **IP20**



DROP VOLTAGE TABLE


		CABLE LENGHT (m)			
POWER (W)	CABLE SECTION (mm²)	<25	<50	<75	<100
60	0,75	✓	✓	X	X
	1,5	✓	✓	✓	✓
100	0,75	✓	X	X	X
	1,5	✓	✓	✓	X

COLOUR | **WT** | **NT** |

MATERIAL | **INOX AISI 304** | **AL** | **PC** |

MINIMAL TRACK TRIMLESS

>> MORE INFO



MINIMAL TRACK 24V Trimless

Profile 2m A467-02-00- | N |




MINIMAL TRACK 24V Trimless

Rubber Cable n x 1m A467-00-01- | N |

n = Total Length of System.

24 V | Max. 4A




MINIMAL TRACK 24V Trimless

Corner 90° 1 Plane

A467-00-02- | N |


Cable Length = 140mm.



MINIMAL TRACK 24V Trimless

Corner 90° 1 Plane Connector

A467-00-03- | N |




MINIMAL TRACK 24V Trimless

Corner 90° 2 Planes

A467-00-04- | N |

Cable Length = 200mm.



MINIMAL TRACK 24V Trimless

End Caps

A467-00-05- | N |

Two End Caps Included



MINIMAL TRACK 24V Trimless

Straight Joiner


A467-00-06



MINIMAL TRACK 24V Trimless

Connection Box

A467-00-07- | N |

MINIMAL TRACK 24V
Remote Power Supply

ON/OFF

0434-01-37

P

V

D (A x B x C)

60W

24V


180 x 52 x 30mm

0433-10-22

100W

24V

295 x 43 x 30mm

220V~
240V

MINIMAL TRACK 24V

Remote Constant Voltage Dimmer



0433-01-32

DALI / Push

24V

181 x 42 x 20mm

0433-01-33

CASAMBI

24V


172 x 42 x 20mm

0434-01-64

WIFI

24V

105 x 44 x 23mm





24V

DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm ²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
		TRACK LENGTH (m)			
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

Reduce 5 meters per each 'Corner 90° 1 Plane CONNECTOR' used.

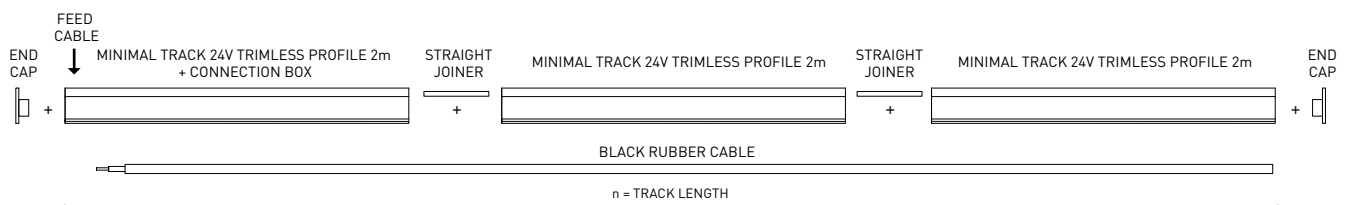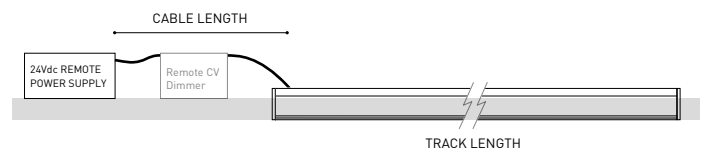

COLOUR | N ■ |

DIM OPTIONS PLEASE CONSULT



>> MORE INFO

		P	CCT	I	Flux	LOR
BLACK FOSTER Micro 24V Surface 5	A468-20-10- NT WT	7W	2700K	500mA	775 lm	87%
	A468-20-11- NT WT	7W	3000K	500mA	800 lm	87%
	A468-20-12- NT WT	7W	4000K	500mA	850 lm	87%


24 V |  IP20 | CRI>90 | L90B10 >60.000 h

 MacAdam Step 3

 INCL

 MINIMAL TRACK

 37°

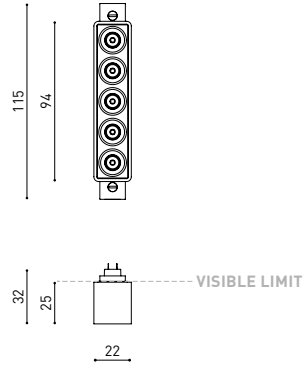

COLOUR | NT ■ | WT □ | MATERIAL |  AL |  ABS+PC |

» PLEASE CONSULT





>> MORE INFO

			P	CCT	Flux	LOR	L
TRACK 48V + IND. LIGHT 1400	A466-01-20- NT WT		18,3W	2700K	2320lm	70%	1402mm
	A466-01-21- WT NT		18,3W	3000K	2380lm	70%	1402mm
	A466-01-22- WT NT		18,3W	4000K	2585lm	70%	1402mm
TRACK 48V + IND. LIGHT 2800	A466-02-20- WT NT		39,2W	2700K	5210lm	70%	2802mm
	A466-02-21- WT NT		39,2W	3000K	5360lm	70%	2802mm
	A466-02-22- WT NT		39,2W	4000K	5820lm	70%	2802mm

48 V | III | IP20 | CRI>90 | L90B5
>50.000 h




TRACK 48V + INDIRECT LIGHT 1400 / 2800




Indirect Light Suspension kit 48V (2 units)

A466-00-03- | NT | WT |



Suspension straight joiner kit 48V

A466-00-04- | NT | WT |



Suspension 90° Corner joiner kit 48V

A466-00-05- | NT | WT |

III *Electrical connection not included.



DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		50	50	X	X
100	0,75	50	50	X	25
	1,5	50	50	40	25
150	0,75	40	15	X	X
	1,5	50	40	20	X

For calculations, you must consider indirect light power.

	P	V	D (A x B x C)
CONSTANT VOLTAGE LED POWER SUPPLY	0434-01-61* N W	100W 48V	298 x 19 x 16mm
	0434-01-62	150W 48V	350 x 30 x 18mm


220 V~ 240 V~ *To be installed inside the track.



COLOUR | NT ■ | N ■ | WT □ |


MATERIAL | AL ■ | PC □ |

ⒺⓂ Ⓢ PLEASE CONSULT




Live-End Connector 48V

A338-00-01- | N | W |



L-JOINT Connector 48V

A338-00-12- | N | W |




Corner 90° Connector One Plane 48V

A338-00-24- | N | W |




End 48V

A338-00-06- | NT | WT |




Central Connector 48V

A338-00-02- | N | W |



Wireless Control 48V

0434-01-31- | N | W | Casambi/AAG Stucchi App




Cover Gap 1m 48V

A338-00-30- | N | W |



End Feed 48V



A338-00-07- | NT | WT |



Wired Power Supply Case 48V

A338-00-25- | NT | WT | 150W NO DIM

A338-00-26- | NT | WT | 150W DIM



Suspension Feed Kit

A338-00-16- | N | W | NO DIM

A338-00-17- | N | W | DIM

For remote power supply

A338-00-27- | N | W | NO DIM

A338-00-28- | N | W | DIM

For power supply inside the track


MAINS TRIMLESS



MAINS THICK TRIMLESS



STEEL CABLE TRIMLESS



WIRE TRIMLESS ACCESSORIES

FEED


Mains Trimless*

A023-00-01- | W | N |



Mains Thick Trimless*

A023-00-02- | W | N |

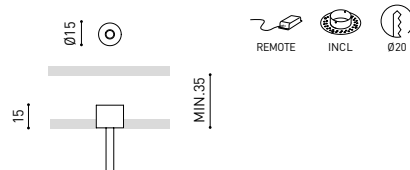

FASTENING

Steel Cable Trimless*

A023-00-05- | W | N |



COLOUR | WT □ | NT ■ | W □ | N ■ |

MATERIAL | AL □ | PC □ |

* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT

» PLEASE CONSULT



48V SYSTEM

WIZ 48V



>> MORE INFO

WIZ 48V	+RE	P	CCT	I	Flux	LOR
A465-0- -10- WT NT WTW NTW -S		12,4W	2700K	350mA	1470 lm	86%
A465-0- -11- WT NT WTW NTW -S		12,4W	3000K	350mA	1530 lm	86%
A465-0- -12- WT NT WTW NTW -S		12,4W	4000K	350mA	1550 lm	86%

48 V | IP20 | CRI>90 | L80B10 > 60.000 h



*OPTIONS	
1	No DIM
2	DIM DALI


+RE	REF. ENDING	EXAMPLE
	Track 48V	A4650110WT
-S	Track 48V Short	A4650110WT-S

OPTIONAL

WIZ High Chromatic LED

NOT SOLD SEPARATELY
AFFECTS THE LIGHTING PARAMETERS

FINISHING	Body	Lampshade	Adaptor
WT	WT	N	N
NT	NT	N	N
WTW	WT	N	W
NTW	NT	N	W

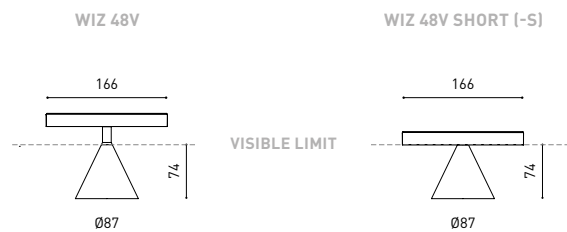


COLOUR | WT | NT | W | N |

MATERIAL | AL | ABS+PC |

* OTHER DIM OPTIONS PLEASE CONSULT

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT



ACCESSORY

TRIMLESS TOOL

>> MORE INFO




INSTALLATION GUIDE

https://youtu.be/sa_xAgj4ji4

OPTIONAL ACCESSORY

TRIMLESS TOOL D16 X D34mm A478-00-00




Suitable for:

Magnetic Connector | A435-01-00:

- FIT 20 | A431-00-XX
- FIT 27 | A432-01-XX
- iO Micro | A434-01-XX
- PLUS Micro | A433-01-XX
- SIX XS | A429-01-XX
- TOP Micro | A430-01-XX

OPTIONAL ACCESSORY

TRIMLESS TOOL D43 X D70mm A478-00-02

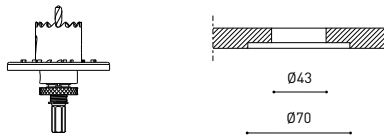


Suitable for:

Alaska Trimless Accessory | A401-10-XX
 Shot Light Trimless Accessory | A269-00-00
 Shot Light Trimless Accessory 2 | A269-00-01
 Shot Light Trimless Accessory 3 | A269-00-02
 Lens Light Trimless Accessory | A470-00-00

OPTIONAL ACCESSORY

TRIMLESS TOOL D79 X D86mm A478-00-04

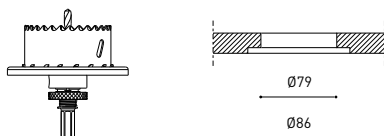


Suitable for:

Shot Light S Flex | A477-00-00

OPTIONAL ACCESSORY

TRIMLESS TOOL D20 X D52mm A478-00-01

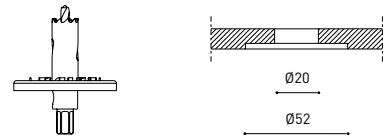

Suitable for:


Alaska Big | A455-XX-XX

Wire Trimless Accessory | A023-XX-XX:

- Acc. Mains Trimless | A023-00-01
- Acc. Mains Thick Trimless | A023-00-02
- Acc. Coaxial Trimless | A023-00-03
- Acc. Unipolar Trimless | A023-00-04
- Acc. Steel Cable Trimless | A023-00-05
- Acc. Steel Cable Regulator Trimless | A023-00-06

OPTIONAL ACCESSORY

TRIMLESS TOOL D59 X D100mm A478-00-03

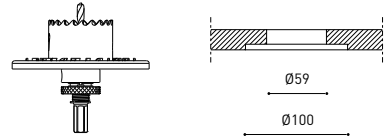


Suitable for:

Alaska Big Trimless Accessory | A426-10-00
 Shot Light S Trimless Accessory | A463-00-00

OPTIONAL ACCESSORY

TRIMLESS TOOL D79 X D120mm A478-00-05

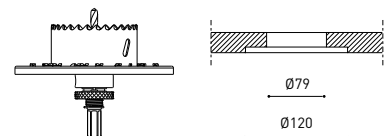

Suitable for:

Shot Light M Trimless Accessory | A298-00-00



>> MORE INFO

						P	CCT	Beam	I	Flux	LOR
FIT 65 Surface	A471-0-	Ⓢ -11-	WT	NT		10,3W	3000K	18°	300mA	1300 lm	90%
	A471-0-	Ⓢ -12-	WT	NT		10,3W	4000K	18°	300mA	1320 lm	90%
	A471-0-	Ⓢ -21-	WT	NT		10,3W	3000K	26°	300mA	1300 lm	88%
	A471-0-	Ⓢ -22-	WT	NT		10,3W	4000K	26°	300mA	1320 lm	88%
	A471-0-	Ⓢ -31-	WT	NT		10,3W	3000K	36°	300mA	1300 lm	84%
	A471-0-	Ⓢ -32-	WT	NT		10,3W	4000K	36°	300mA	1320 lm	84%

220
240 V~ |  IP20 | CRI>90 | L80B10
> 60.000 h




Ⓢ *OPTIONS

1	No DIM
2	DIM DALI

OPTIONAL ACCESSORY

FIT 65 Anti-glare Honeycomb Louver ** A356-00-00

NOT SOLD SEPARATELY



COLOUR | WT ☐ | NT ☒ |

MATERIAL |  AL |  PC |

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

 » PLEASE CONSULT



>> MORE INFO

		P	CCT	Beam	I	Flux	LOR
FIT 80 Surface	A472-0- -11- WT NT	19W	3000K	19°	550mA	2500 lm	90%
	A472-0- -12- WT NT	19W	4000K	19°	550mA	2540 lm	90%
	A472-0- -21- WT NT	19W	3000K	28°	550mA	2500 lm	84%
	A472-0- -22- WT NT	19W	4000K	28°	550mA	2540 lm	84%
	A472-0- -31- WT NT	19W	3000K	37°	550mA	2500 lm	85%
	A472-0- -32- WT NT	19W	4000K	37°	550mA	2540 lm	85%

220
240 V~ | IP20 | CRI>90 | L80B10
> 60.000 h




*OPTIONS

1	No DIM
2	DIM DALI

OPTIONAL ACCESSORY

FIT 80 Anti-glare Honeycomb Louver ** A357-00-00

NOT SOLD SEPARATELY



COLOUR | WT | NT

MATERIAL | AL | PC |

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



>> MORE INFO

						P	CCT	BEAM	I	Flux	LOR
FIT 27 24V 1	A399-00-10-	WT	NT	G		4,5W	2700K	22°	400mA	440 lm	84%
	A399-00-11-	WT	NT	G		4,5W	3000K	22°	400mA	475 lm	84%
	A399-00-20-	WT	NT	G		4,5W	2700K	37°	400mA	440 lm	82%
	A399-00-21-	WT	NT	G		4,5W	3000K	37°	400mA	475 lm	82%
	A399-00-30-	WT	NT	G		4,5W	2700K	46°	400mA	440 lm	81%
	A399-00-31-	WT	NT	G		4,5W	3000K	46°	400mA	475 lm	81%
FIT 27 24V 2	A399-10-10-	WT	NT	G		5,5W	2700K	22°	500mA	550 lm	84%
	A399-10-11-	WT	NT	G		5,5W	3000K	22°	500mA	600 lm	84%
	A399-10-20-	WT	NT	G		5,5W	2700K	37°	500mA	550 lm	82%
	A399-10-21-	WT	NT	G		5,5W	3000K	37°	500mA	600 lm	82%
	A399-10-30-	WT	NT	G		5,5W	2700K	46°	500mA	550 lm	81%
	A399-10-31-	WT	NT	G		5,5W	3000K	46°	500mA	600 lm	81%

24 V |  IP20 | CRI>90 |  L80B10 > 60.000 h

 MacAdam Step 2


 INCL

 MINIMAL TRACK

 355°

 90°

 22° / 37° / 46°

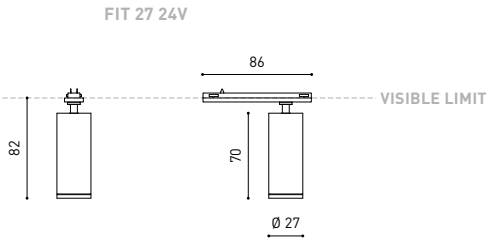


COLOUR | WT  | NT  | G  |


MATERIAL |  AL |  PC |

 » PLEASE CONSULT



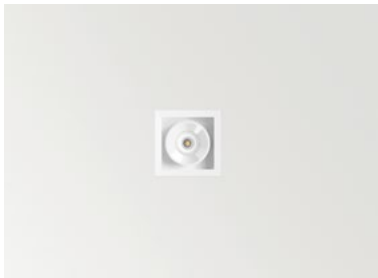

>> MORE INFO

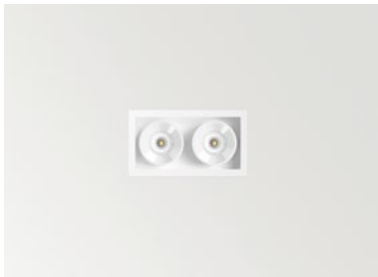

>> MORE INFO



>> MORE INFO

		P	CCT	I	Flux	LOR
BLACK FOSTER Recessed 1	A319-10- -0- N W WN NMG	2,1W	2700K	700mA	190 lm	92%
	A319-10- -1- N W WN NMG	2,1W	3000K	700mA	210 lm	92%
	A319-10- -2- N W WN NMG	2,1W	4000K	700mA	250 lm	92%

220
240 V~ | **IP20** | **CRI>90** | **L80B10**
>60.000h



		P	CCT	I	Flux	LOR
BLACK FOSTER Recessed 2	A319-20- -0- N W WN NMG	4,2W	2700K	700mA	380 lm	92%
	A319-20- -1- N W WN NMG	4,2W	3000K	700mA	420 lm	92%
	A319-20- -2- N W WN NMG	4,2W	4000K	700mA	500 lm	92%

220
240 V~ | **IP20** | **CRI>90** | **L80B10**
>60.000h



		P	CCT	I	Flux	LOR
BLACK FOSTER Recessed 3	A319-30- -0- N W WN NMG	6,3W	2700K	700mA	570 lm	92%
	A319-30- -1- N W WN NMG	6,3W	3000K	700mA	630 lm	92%
	A319-30- -2- N W WN NMG	6,3W	4000K	700mA	750 lm	92%


220
240 V~ | **IP20** | **CRI>90** | **L80B10**
>60.000h



*OPTIONS

1	No DIM
2	DIM Push
4	DIM DALI

DIM PHASE CUT PLEASE CONSULT

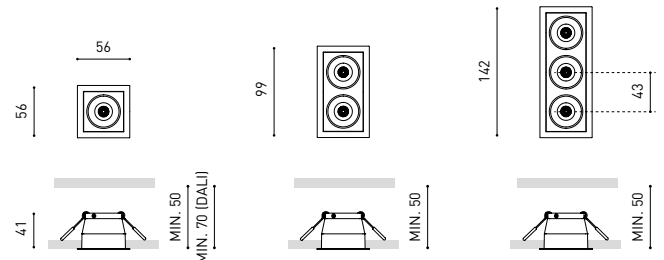

COLOUR | **N** | **W** | **WN** | **NMG** |

MATERIAL | **AL** | **ABS+PC** |

"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N, WN & NMG COLOURS

& >> PLEASE CONSULT



>> MORE INFO



>> MORE INFO

		P	CCT	I	Flux	LOR
BLACK FOSTER Recessed 5	A319-40- -0- N W WN NMG	10,5W	2700K	700mA	950 lm	92%
	A319-40- -1- N W WN NMG	10,5W	3000K	700mA	1050 lm	92%
	A319-40- -2- N W WN NMG	10,5W	4000K	700mA	1250 lm	92%

220
240 V~ | IP20 | CRI>90 | L80B10
>60.000h



		P	CCT	I	Flux	LOR
BLACK FOSTER Recessed 2x2	A319-50- -0- N W WN	8,4W	2700K	700mA	760 lm	92%
	A319-50- -1- N W WN	8,4W	3000K	700mA	840 lm	92%
	A319-50- -2- N W WN	8,4W	4000K	700mA	1000 lm	92%


220
240 V~ | IP20 | CRI>90 | L80B10
>60.000h



*OPTIONS

1	No DIM
2	DIM Push
4	DIM DALI

DIM PHASE CUT PLEASE CONSULT

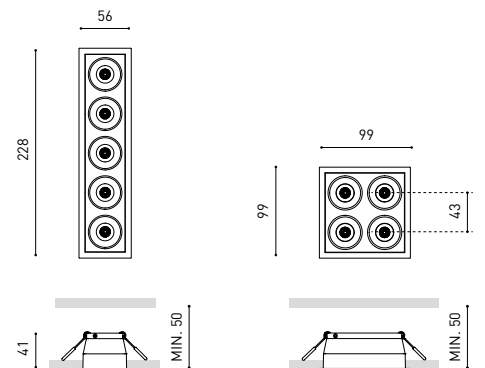

COLOUR | **N** | **W** | **WN** | **NMG** |

MATERIAL | **AL** | **ABS+PC** |


"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N, WN & NMG COLOURS

& » PLEASE CONSULT




MINIMAL TRACK

>> MORE INFO



MINIMAL TRACK 24V Profile 2m

A384-02-00- | N | WT |


 INSTALLATION GUIDE
<https://youtu.be/KnedJbKp7oo>


MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N | WT |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded

A384-00-03- | N | WT |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N | WT |

Cable Length = 100mm.




MINIMAL TRACK 24V End Cap

A384-00-05- | N | WT |






MINIMAL TRACK 24V Connection Box

A384-00-06- | N | WT |




					P	V	D [A x B x C]	
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07-	NT	WT	40W	24V	280 x 30 x 24mm	
		A384-00-08-	NT	WT	100W	24V	280 x 30 x 24mm	
220 240	V~	Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37				60W	24V	180 x 52 x 30mm
		0433-10-22				100W	24V	295 x 43 x 30mm
220 240	V~							
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push			24V	181 x 42 x 20mm	
		0433-01-33	CASAMBI			24V	172 x 42 x 20mm	
		0434-01-64	WIFI			24V	105 x 44 x 23mm	

24V



DROP VOLTAGE TABLE

		CABLE LENGTH [m]			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION [mm²]	TRACK LENGTH (m)			
		30	30	30	30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

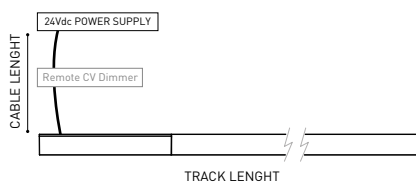
CONNECTION BOX /
POWER SUPPLY BOX

MINIMAL TRACK 24V PROFILE 2m

MINIMAL TRACK 24V PROFILE 2m

MINIMAL TRACK 24V PROFILE 2m

END CAP



COLOUR | N ■ | NT ■ | WT □ |

DIM OPTIONS PLEASE CONSULT




OPTIONAL ACCESSORIES

WIRE TRIMLESS Accessories



Coaxial Trimless A023-00-03- | W | N |

FASTENERS NOT AVAILABLE.



COAXIAL TRIMLESS





MINIMAL TRACK 24V Suspension

Profile 2m

A384-02-00- | N | WT |

Profile 2m Initial feed kit

A400-02-10- | N | WT |

Profile 2m Middle feed kit*




A400-02-20- | N | WT |

* Unidirectional Middle Feed.

MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N | WT |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m

A400-00-01- | N |

n = Total Length of System.

MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02- | N | WT |

MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N | WT |


Max distance between suspension kits = 100 cm.

MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N | WT |

Two End Caps Included.

24 V | Max. 4A





			P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT WT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT WT	100W	24V	280 x 30 x 36mm
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push	24V	181 x 42 x 20mm
		0433-01-33	CASAMBI	24V	172 x 42 x 20mm
		0434-01-64	WIFI	24V	105 x 44 x 23mm

24 V

DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm ²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

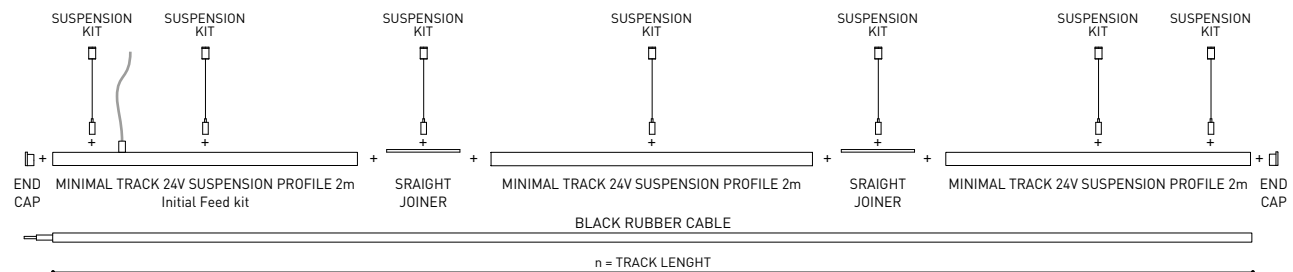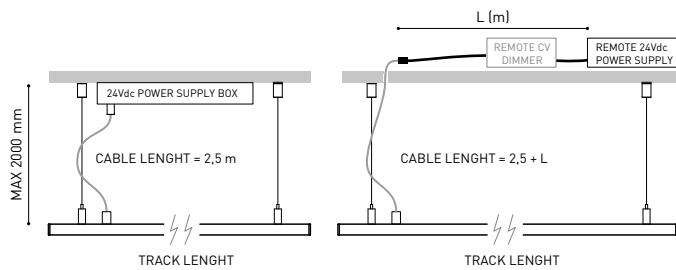

COLOUR | N ■ | NT ■ | WT □ |

DIM OPTIONS PLEASE CONSULT

RAL ⓘ » 538



>> MORE INFO

		P	CCT	I	Flux	LOR
LINE Micro 250 24V	A395-00-00- N WT	2W	2700K	400mA	330 lm	70%
	A395-00-01- N WT	2W	3000K	400mA	340 lm	70%
LINE Micro 500 24V	A395-10-00- N WT	5W	2700K	400mA	820 lm	70%
	A395-10-01- N WT	5W	3000K	400mA	840 lm	70%
LINE Micro 1000 24V	A395-20-00- N WT	9W	2700K	700mA	1430 lm	70%
	A395-20-01- N WT	9W	3000K	700mA	1500 lm	70%

24 V |  IP20 | CRI>90 | L80B10 > 60.000 h


 MacAdam Step 2

 INCL


 MINIMAL TRACK

 113°


LINE MICRO 250 24V



LINE MICRO 500 24V



LINE MICRO 1000 24V



COLOUR | N ■ | WT □ | MATERIAL |  AL |  PC |

NOT VALID FOR MINIMAL TRACK 24V TRIMLESS » PLEASE CONSULT
COLOURS MAY AFFECT THE LIGHTING PARAMETERS

48V SYSTEM

LINE 48V



>> MORE INFO


		P	CCT	I	Flux	LOR
LINE 500 48V	A376-10- 0- N WT	10,5W	2700K	350mA	1500 lm	65%
	A376-10- 1- N WT	10,5W	3000K	350mA	1600 lm	65%
	A376-10- 2- N WT	10,5W	4000K	350mA	1650 lm	65%
LINE 1000 48V	A376-20- 0- N WT	21W	2700K	700mA	3000 lm	65%
	A376-20- 1- N WT	21W	3000K	700mA	3200 lm	65%
	A376-20- 2- N WT	21W	4000K	700mA	3300 lm	65%
LINE 2000 48V	A376-30- 0- N WT	42W	2700K	700mA	6000 lm	65%
	A376-30- 1- N WT	42W	3000K	700mA	6400 lm	65%
	A376-30- 2- N WT	42W	4000K	700mA	6600 lm	65%

48 V | III IP20 | CRI>90 | L80B10 > 60.000 h



00 *OPTIONS

1	No DIM
2	DIM DALI

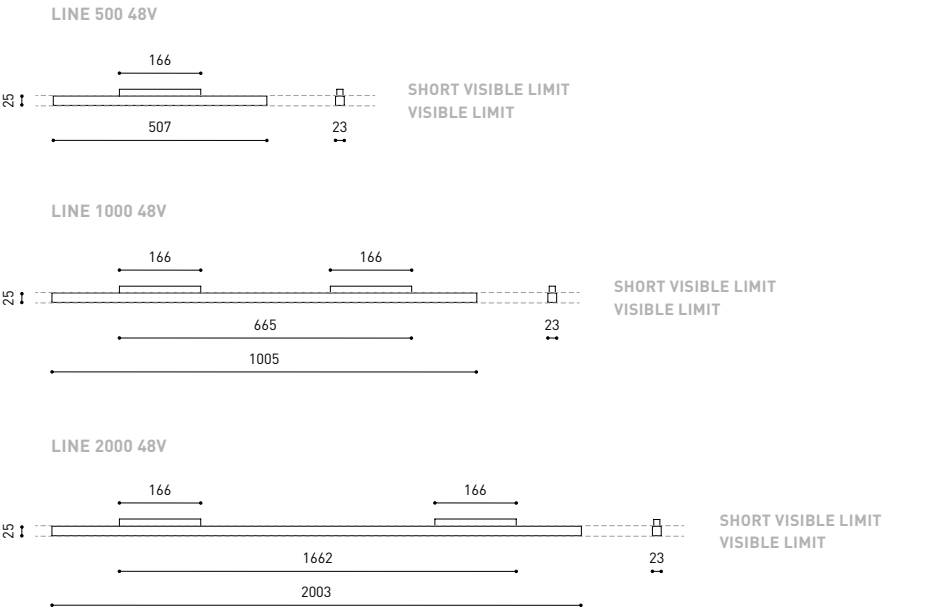

COLOUR | N ■ | WT □ | MATERIAL | AL | PC |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

» PLEASE CONSULT

Accessories

Driver options

FOR PRODUCTS WITH DRIVER EXCLUDED
220-240 VAC INPUT

DIM	DRIVER	PIECES			
		BLACK FOSTER MICRO SURFACE 5	BLACK FOSTER MICRO SURFACE 2X2	BLACK FOSTER MICRO SURFACE 3X3	REC MICRO
ON/OFF	D5			1	
	D6	1...2	1...3		
	D7				1...2
	D11				1...3
DALI	D23			1	
	D24	1...3	1...3		
	D25				1...2
	D28				1...3

CONSTANT CURRENT LED DRIVERS


DRIVER	TPOLOGY	DIM	REFERENCE	DESCRIPTION	I
D5	A	ON/OFF	04340153	DRIVER PROFESSIONALE 42W CONFIG.400mA	400mA
D6	A		04340042	DRIVER PROFESSIONALE 42W CONFIG.500mA	500mA
D7	B		04340040	DRIVER PROFESSIONALE 42W CONFIG.700mA	700mA
D11	B		04340143	DRIVER MP50 K3 CONFIG.700mA	700mA
D23	D	DALI	04340154	DRIVER MAX.32W DIM DALI CONFIG 400mA	400mA
D24	D		04340044	DRIVER MAX.32W DIM DALI CONFIG 500mA	500mA
D25	E		04340046	DRIVER MAX.32W DIM DALI CONFIG 700mA	700mA
D28	E	DALI + PUSH + 1-10V	04340125	DRIVER MAXI JOLLY CONFIG 700mA	700mA

DRIVER MAXIMUM DISTANCE RANGE

DRIVER TYPOLOGY		A				B				C			
WIRE CROSS - SECTION		0,5mm ²	1mm ²	1,5mm ²	2,5mm ²	0,5mm ²	1mm ²	1,5mm ²	2,5mm ²	0,5mm ²	1mm ²	1,5mm ²	2,5mm ²
DISTANCE TO LED		20m	50m	50m	50m	10m	20m	20m	50m		10m	20m	30m

D				E				F				G			
0,5mm ²	1mm ²	1,5mm ²	2,5mm ²	0,5mm ²	1mm ²	1,5mm ²	2,5mm ²	0,5mm ²	1mm ²	1,5mm ²	2,5mm ²	0,5mm ²	1mm ²	1,5mm ²	2,5mm ²
15m	15m	15m	15m	10m	15m	15m	15m		10m	10m	15m	2m	2m	2m	2m

CONSTANT CURRENT LED DRIVER


				P (MAX)	I	D
ON/OFF			0434-01-53	18W	400mA	
			0434-00-42	22W	500mA	129 x 42 x 30mm
			0434-00-40	31W	700mA	
			0434-01-43	50W	700mA	124 x 79 x 22mm
DIM		 DALI	0434-01-54	19W	400mA	
			0434-00-44	24W	500mA	103 x 67 x 21mm
			0434-00-46	32W	700mA	
		 DALI PUSH / 1-10V	0434-01-25	50W	700mA	124 x 79 x 22mm

Installation Schemes

PUSH: OPTION 1




1-10V




PHASE CUT



PUSH: OPTION 2




DALI




Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

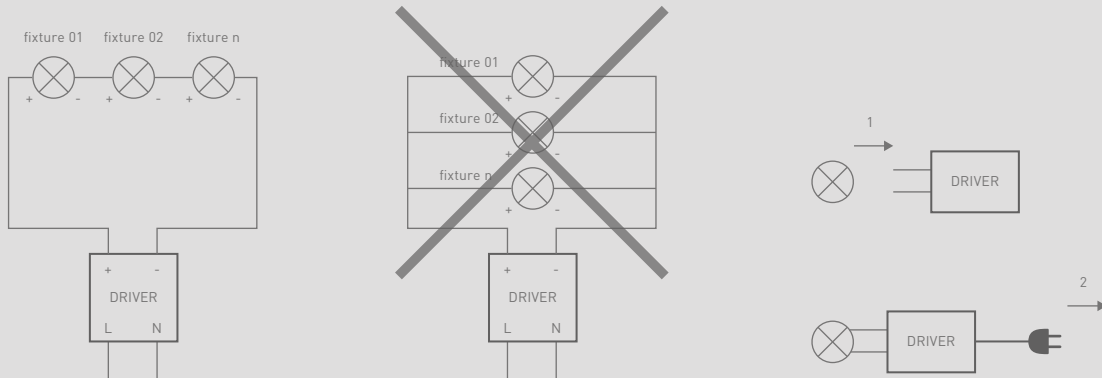

Trimless Mounting

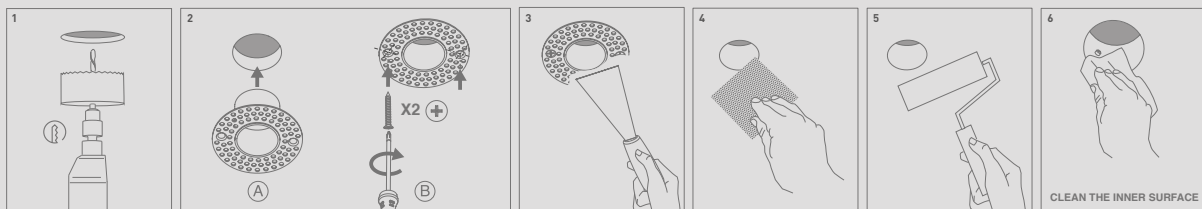

Symbols

GLOSSARY

L	Longitud (en mm).	Length (in mm).	Longueur (en mm).	Lunghezza (in mm).	Länge (in mm).
AL	Aluminio	Aluminium	Aluminium	Alluminio	Aluminium
PC	Policarbonato	Polycarbonate	Polycabonate	Policarbonato	Polycarbonat
PE	Polietileno	Polyethylene	Polyéthylène	Poietilene	Polyäthylen
GL	Cristal	Glass	Verre	Vetro	Glas
PMMA	Polimetilmetacrilato	Polymethyl methacrylate	Polyméthacrylate de méthyle	Polimetilmetacrilato	Polymethylmetacrylat
INOX	Acero inoxidable	Stainless steel	Acier inoxydable	Acciaio inossidabile	Edelstahl
MATT	Mate	Matt	Opaque	Opaco	Matt
TRANS	Transparente	Transparent	Transparent	Trasparente	Transparent
ABS	Acrilonitrilo Butadieno Estireno	Acrylonitrile Butadiene Styrene	Acrylonitrile Butadiène Styrene	Acrlonitrile Butadiene Styrene	Acrylnitril-Butadien-Styrol
LOR	<i>Lumen Output Ratio.</i> Relación entre el flujo de salida de la luminaria y el flujo de salida de la fuente de luz.	Lumen Output Ratio. Ratio between the output flux of the luminaire and the output flux of the light source.	<i>Lumen Output Ratio.</i> Rapport entre le flux de sortie du luminaire et le flux de sortie de la source de lumière.	<i>Lumen Output Ratio.</i> Relazione tra il flusso di uscita dell'apparecchio e il flusso di uscita della sorgente luminosa.	Zusammenhang zwischen dem Ausgangsstrom der Leuchte und dem Ausgangsstrom der Lichtquelle.
IPXX	Índice de estanqueidad	Sealing rating	Indice d'étanchéité	Indice di sigillatura	Schutzgrad gegen Eindringen von Staub und Feuchtigkeit
IKXX	Índice de protección contra impactos	Impact resistance	Indice de protection contre des impacts	Indicizzi di protezione contro impatti	Stoßfestigkeitsgrad
MAX XX W	Potencia máxima	Maximum power	Puissance Maximum	Potenza massima	Maximale Leistung
CCT	Temperatura de color	Colour Temperature	Température de couleur	Temperatura di colore	Farbtemperatur
	Fabricado en	Made of	Fabrique en	Fabbricato in	Hergestellt aus
	Reflector	Screen	Réflecteur	Riflettore	Reflektor
	Cristal óptico	Optical glass	Verre optique	Verro ottico	Optischem glas
	Difusor	Diffuser	Diffuseur	Diffusore	Diffusor
	Difusor	Diffuser	Diffuseur	Diffusore	Diffusor
	Lente refractora elíptica	Elliptical refractor	Réfracteur élliptique	Rifrattore ellittico	Linse (f. elliptischen Lichtkegel)
	Filtro panel de abeja	Honeycomb filter	Filtre nid d'abeilles	Filtri favo	Waben-Raster
	Pantalla asimétrica	Asymmetric screen	Accessoire asymetrique	Visiera asimetrica	Assymetrischer Schirm/Blende
	Difusor homogeneizador del haz de luz	Beam Mixer Diffuser	Diffuseur homogénéisateur de faisceau lumineux	Diffusore di fascio luminoso misto	Strahlenmischdiffusor
	Bisel extra	Add-on bezel	Collerette extra	Cornice extra	Zusatz-Zierring
	Certificado ENEC	ENEC certified	Certifié ENEC	Certificato ENEC	ENEC-Zertifizierung
	Certificado IEC	IEC certified	Certifié IEC	Certificato IEC	IEC-Zertifizierung
	Compatible con la normativa francesa RT2012 & BBC	Compatible with the French Standard RT2012 & BBC	Compatible avec la Norme française RT2012 & BBC	Compatibile con la normativa francese RT2012 & BBC	Kompatibel mit der französischen Norm RT2012 & BBC



	Clase I	Class I	Classe I	Classe I	Klasse I
	Clase II	Class II	Classe II	Classe II	Klasse II
	Clase III	Class III	Classe III	Classe III	Klasse III
12 V	Tensión de alimentación 12V	Input supply voltage 12V	Tension d'alimentation de l'ampoule 12V	Tensione di alimentazione della lampada 12V	Anschlusssspannung 12V
24 V	Tensión de alimentación 24vdc	Power supply voltaje 24vdc	Tension d'alimentation de l'ampoule 24vdc	Tensione di alimentazione della lampada 24vdc	Netzspannung 24vdc
48 V	Tensión de alimentación 48vdc	Power supply voltaje 48vdc	Tension d'alimentation de l'ampoule 48vdc	Tensione di alimentazione della lampada 48vdc	Netzspannung 48vdc
220 240 V~	Tensión de alimentación 220-240V	Power supply voltaje 220-240V	Tension d'alimentation de l'ampoule 220-240V	Tensione di alimentazione della lampada 220-240V	Netzspannung 220-240V
	Equipo no incluido	Control gear not included	Équipement non inclus	Alimentatore non compreso	Vorschaltgerät exklusive
	Equipo electrónico incluido	Electronic control gear included	Équipement électronique inclus	Alimentatore elettronico compreso	Vorschaltgerät elektronische inklusive
	Alojamiento en mm para empotrables	Fitting hole for recessed luminaires in mm	Espace d'emplacement en mm pour encastrables	Foro in mm ad incasso	Einbauloch in mm
	Empotrable cuadrado para agujero redondo	Squared fixture for round fitting holes	Encastrable carré pour trou rond	Quadrato da incasso per foro rotondo	Quadratische Leuchte mit rundem Einbauloch
	Ángulo de basculación	Tilting angle	Angle de basculation	Angolo di inclinazione	Drehwinkel - Kippwinkel
	Doble basculación	Double tilting acción	Double basculation	Doppia inclinazione	Doppelte Schwenkbarkeit
	Ángulo de giro	Rotation angle	Angle de rotation	Angolo di rotazione	Drehwinkel
	Conexión rápida	Fast connection	Conexion rapide	Collegamento rapido	Schnellsteckeranschluss
	Bloque de conexión no incluido	Terminal strip not included	Bande terminale connector exclus	Morsetto non compreso	Ohne Klemmenleiste
	Conector USB-C	USB-C connector	Port USB-C	USB-C connect	USB-C Verbindungskabel
	Cargador universal	Universal charger	Chargeur universel	Caricatore universale	Universal-Ladegerät
	Conexión con enchufe	Plug-in	Connexion avec prise	Collegamento con spina	Anschluss mit Stecker
	Tipo de carril	Rail Type	Type de rail	Tipo de binario	Schienenmodelle
	Regulable	Dimmable	Gradable	Dimmerabile	Dimmbar
	Longitud del cable	Cable length	Longueur de câble	Lunghezza di cavo	Hängekabel Schnelljustierungsvorrichtung
	Regulación rápida del cable de suspensión	Quick adjustment for cable suspension	Régulation rapide du câble de suspension	Regolazione rapida del cavo di sospensione	Schnelle Regulation del Hängekabels
	Control inalámbrico	Wireless control	Contrôle sans fil	Wireless control	Wireless control
	Dispositivo para alumbrado de emergencias	Emergency lighting device	Dispositif pour éclairage de secours	Dispositivo per illuminazione di emergenza	Notbeleuchtung
	Batería LI-ION	LI-ION battery	Batterie au lithium-ion	Batteria agli ioni di litio	Lithium-Ionen-Akku
	Tipo de instalación y dirección del haz de luz	Installation type and light beam direction	Type d'installation et direction du faisceau lumineu	Tipo d'impianto e direzione del fascio	Art und Ausrichtung des Lichtkegels
	Confort visual. UGR (Unified Glare Rating)	UGR (Unified Glare Rating) Visual comfort	Confort visuel. UGR (Unified Glare Rating)	Comfort visivo. UGR (Unified Glare Rating)	Sehkomfort. UGR (Unified Glare Rating)
	Estabilidad cromática: Pasos MacAdam	Chromatic stability: MacAdam Steps	Stabilité chromatique: Pas MacAdam	Stabilità cromatica: Step MacAdam	Farbstabilität: MacAdam Stufen
	Carga máxima soportada	Maximum supported load	Charge maximale supportée	Carico massimo supportato	Maximale Traglast
	Temperatura máxima en sueficie	Maximum surface temperature	Température Maximale sur une surface	Temperatura massima in superficie	Maximale Temperatur an der Oberfläche
	Válido para exterior	Suitable for outdoor use	Agréé pour l'extérieur	Adatto per uso esterno	Geeignet für Ausseninstallation
	Para uso interior	Indoor luminaire	Pour usage en intérieur	Per uso interno	Innenleuchte



Colours

The lighting values indicated for each ref.code correspond to the results obtained from the tests carried out on the first mentioned colour of the list.



B | White



WT | Textured White



W | Matt White



WN | White-Black



NT | Textured Black



N | Matt Black



NMG | Matt black - Metallized gold



WMG | Matt White - Metallized gold



G | Gold



BG | Brushed Gold



PR | Primer Coating Finishing

BLACK FOSTER

N = RAL 9005
NMG = RAL not available. Metallic finish
NT = RAL 9005
NTMG = RAL not available. Metallic finish
W = Colour in the mass looks alike RAL 9016
WN = Colour in the mass looks alike RAL 9016 & RAL 9005
WT = RAL 9016
WTMG = RAL 9005 not available. Metallic finish

FIT

WT = RAL 9016
NT = RAL 9005
G = RAL not available. Paint of metallic nanoparticles

LENS LIGHT

N = RAL 9005
W = RAL 9016

LINE

WT = RAL 9016
NT = RAL 9005
N = Anodised, bath colour, looks alike RAL 9005
W = Anodised, bath colour, looks alike RAL 9016

LOOP

BG = RAL not available. Electrolytic bath
N = RAL 9005
NT = RAL 9005

MINIMAL TRACK

N = RAL 9005
WT = RAL 9016

REC

WT = RAL 9016
NT = RAL 9005
PR = Primer coating finish

SHOT LIGHT

N = Colour in the mass looks alike RAL 9005
NMG = RAL not available. Metallic finish
W = Colour in the mass looks alike RAL 9016
WMG = RAL not available. Metallic finish

TRACK 48V

N = RAL 9005
NT = RAL 9005
WT = RAL 9016

WIZ

WT = RAL 9016
NT = RAL 9005
N = Anodised, bath colour, looks alike RAL 9005
W = Anodised, bath colour, looks alike RAL 9016

YORU

WT = RAL 9016
NT = RAL 9005

Reference

INDEX

0433-01-32	21, 22, 37, 39	A376-20-XX	41
0433-01-33	21, 22, 37, 39	A376-30-XX	41
0433-10-22	21, 22, 37, 39	A384-00-0X	37
0434-00-40	19, 44	A384-02-00	37, 39
0434-00-42	15, 44	A395-00-0X	40
0434-00-44	15, 44	A395-10-0X	40
0434-00-46	19, 44	A395-20-0X	40
0434-01-25	19, 44	A399-00-XX	32
0434-01-31	25	A400-00-XX	39
0434-01-37	21, 22, 37, 39	A400-02-XX	39
0434-01-43	19, 44	A452-00-0X	4
0434-01-53	15, 44	A453-3X-XX	6
0434-01-54	15, 44	A453-4X-XX	6
0434-01-61	4, 24	A453-5X-XX	6
0434-01-62	4, 24	A454-0X-XX	7
0434-01-64	21, 22, 37, 39	A457-00-XX	19
0434-01-67	21	A458-00-0X	5
A023-00-01	25	A458-0X-00	4
A023-00-02	25	A459-20-0X	15
A023-00-03	38	A459-30-0X	15
A023-00-05	25	A459-40-0X	15
A219-21-06	5	A461-00-0X	19
A219-21-10	5	A462-0X-XX	10
A219-21-21	5	A463-0X-XX	11
A219-22-06	5	A465-0X-1X	27
A317-00-06	5	A466-0X-XX	24
A319-1X-XX	8, 34	A467-00-0X	22
A319-2X-XX	8, 34	A467-02-00	22
A319-3X-XX	8, 34	A468-20-1X	23
A319-4X-XX	9, 35	A469-0X-0X	12
A319-5X-XX	9, 35	A470-0X-0X	13
A338-00-0X	5, 25	A471-0X-XX	30
A338-00-1X	5, 25	A472-0X-XX	31
A338-00-2X	25	A473-10-XX	17
A338-00-30	25	A473-20-XX	17
A356-00-00	30	A474-10-XX	17
A357-00-00	31	A474-20-XX	17
A376-10-X-0	41	A475-X0-0X	21
A376-10-XX	41	A478-00-0X	29

CEILING RECESSED




BLACK FOSTER MICRO




BLACK FOSTER




SHOT LIGHT



LENS LIGHT




SWAP



POINTER



LEX




ALASKA TRIMLESS



PUCK RECESSED



DUOMO



OLYMPIA




DEEP




DROP



STRAM



FOX




MIX




MADISON



QUAD




ESSENTIALS



POP UP



HIDDEN




TWIST



ORBITAL




WELLIT




HUBBLE




MAGNETIC PLUS MICRO



MAGNETIC FIT



MAGNETIC SIX XS




MAGNETIC IO MICRO



MAGNETIC TOP MICRO



SIX RECESSED




FIT RECESSED



PLUS RECESSED

SURFACE



BLACK FOSTER MICRO SURFACE



BLACK FOSTER SURFACE



SHOT LIGHT M SURFACE



TOP




SCOPE SURFACE



PUCK



ORBITAL SURFACE



VOLA



SKY



STRAM SURFACE



DRUM



FIFTY+ SURFACE



FIT SURFACE




IO SURFACE



ZEN TUBE SURFACE

SUSPENSION



ALASKA



ART



STICK



HOLLY



SPIN



SCOPE



VOLA SUSPENSION




SALT



BRIGIT




DRUM SUSPENSION




LOOP



LINE SUSPENSION



BLACK FOSTER SUSPENSION



SLIMGOT



FIFTY+ SUSPENSION

WALL, FLOOR
& PORTABLE



UP



YORU



REC




LIP




FLAP



AURAE



DREAM



RHINO




WALLY




ALFA



YORU SPIKE



DARK



STEP


TRACK
LIGHTS



MINIMAL TRACK



BLACK FOSTER MICRO 24V



ALASKA 24V




PLUS MICRO 24V



SIX XS 24V



TOP MICRO 24V



LINE MICRO 24V




IO MICRO 24V




FIT 24V



STICK 22 24V




TRACK 48V




SIX 48V



FIT 48V



PLUS 48V



IO 48V



ZEN TUBE 48V



WIZ 48V



TOP 48V



LINE 48V



BLACK FOSTER MICRO 48V



STICK 48V



HOLLY 48V



SPIN 48V



TRACK 1L



IO



PLUS MINI 1L




FIT 651L



TRACK 3L



SIX



FIT



PLUS



ZEN



ZEN TUBE



THOR


CUSTOM
SYSTEMS



FANCY SHAPE



TOP FANCY SHAPE



ALASKA FANCY SHAPE



STICK FANCY SHAPE



SPIN FANCY SHAPE



HOLLY FANCY SHAPE

OTHER
CUSTOM SYSTEMS



BLACK FOSTER CUSTOM




BRIGHT LINE




FIFTY+ CUSTOM

LARK &
ACCESSORIES



LARK-111



LARK



TRIMLESS TOOL

CREDITS

ART DIRECTION
Arkoslight Team

GRAPHIC DESIGN
Estudio David Cercós

EDITION
April 2023
Copyright © Arkoslight 2023
All rights reserved



ARKOSLIGHT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia
Valencia · Spain
Fax +34 961 667 054
info@arkoslight.com
www.arkoslight.com

Tel. +34 961 667 207
 Tel. +44 2039 66 45 92
 Tel. +33 182 885 200
 Tel. +39 02 9475 0007
 Tel. +49 221 7159 4740

JOKERLIGHT

Arkoslight trades its products with
UL certification through Jokerlight
2750 NW 84th Ave
Doral · FL 33122 (USA)
info@jokerlight.com
www.jokerlight.com



