

NEWS 2023


# Technical data

ARKOSLIGHT




Black Foster Custom Trimless  
Black Foster Recessed 2x2  
Shot Light  
Lens Light  
Black Foster Micro Surface  
Loop  
Rec Slim & Micro  
Yoru Spike  
Minimal Track Trimless  
Track 48V Indirect Light  
Wiz 48V  
Trimless Tool  
Fit Surface 65 & 80  
Fit 27 24V  
Black Foster Recessed White  
Minimal Track White  
Line Micro 24V White  
Line 48V White


|                                 |                 |
|---------------------------------|-----------------|
| BLACK FOSTER Custom Trimless 1m | A458-01-00-   N |
| BLACK FOSTER Custom Trimless 2m | A458-02-00-   N |
| BLACK FOSTER Custom Trimless 3m | A458-03-00-   N |

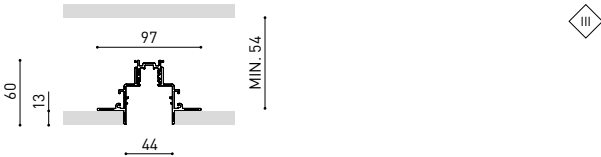


|                              |                 |
|------------------------------|-----------------|
| BLACK FOSTER Custom Trimless | A458-04-00-   N |
| L-Joint                      |                 |

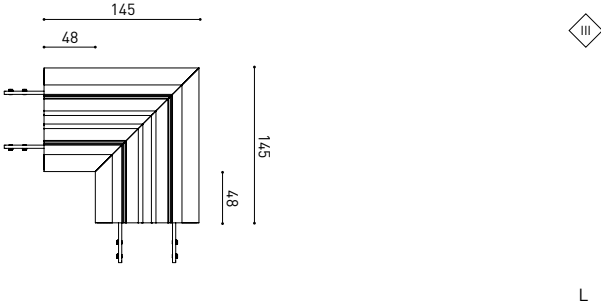

|                                   |                 |       |
|-----------------------------------|-----------------|-------|
| BLACK FOSTER Custom Cover Gap 250 | A452-00-01-   N | 250mm |
| BLACK FOSTER Custom Cover Gap 500 | A452-00-02-   N | 500mm |



|                               |            |
|-------------------------------|------------|
| BLACK FOSTER Custom Trimless  | A458-05-00 |
| Plaster Installation Guard 1m |            |

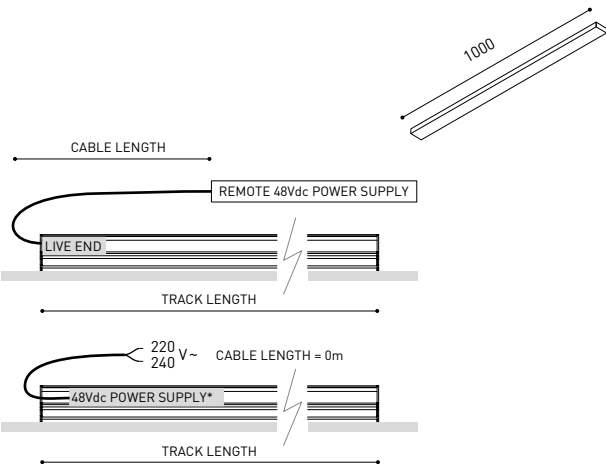


COLOUR | N ■ |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



|                                      |                 | P    | V   | D [A x B x C]   |
|--------------------------------------|-----------------|------|-----|-----------------|
| CONSTANT VOLTAGE<br>LED POWER SUPPLY | 0434-01-61*   N | 100W | 48V | 298 x 19 x 16mm |
|                                      | 0434-01-62      | 150W | 48V | 350 x 30 x 18mm |

220  
240 V~ | \*To be installed inside the track.

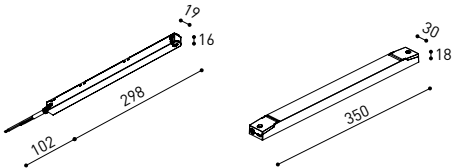

DROP VOLTAGE TABLE

|           |                     | CABLE LENGTH (m) |    |    |    |
|-----------|---------------------|------------------|----|----|----|
|           |                     | 5                | 10 | 20 | 30 |
| POWER [W] | CABLE SECTION (mm²) | TRACK LENGTH (m) |    |    |    |
|           |                     | 50               | 50 | X  | X  |
| 100       | 0,75                | 50               | 50 | X  | 25 |
|           | 1,5                 | 40               | 15 | X  | X  |
| 150       | 0,75                | 50               | 40 | 20 | X  |
|           | 1,5                 |                  |    |    |    |





#### BLACK FOSTER Custom Trimless End

A458-00-01- | N |

Cover Thickness = 2 mm.



#### BLACK FOSTER Custom Trimless End Feed

A458-00-02- | N |

Cover Thickness = 2 mm.




#### BLACK FOSTER Straight Joiner

A317-00-06




#### Live-End Connector 48V

A338-00-01- | N |




#### L-Joint Connector 48V

A338-00-12- | N |



#### Central Connector 48V

A338-00-02- | N |



#### MOUNTING ACCESSORIES

##### Track Fixation Kit

A219-21-06- | B |



##### Track Flush Ceiling Kit

A219-22-06- | B |




##### Track Clamp Kit for M6 ROD

A219-21-21- | B |



##### Track Suspension Kit

A219-21-10- | B |



#### SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000 mm - 2 Pcs


2000 mm - 2 Pcs

3000 mm - 3 Pcs

COLOUR | N ■ | B □ |

>> MORE INFO

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED  
 BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

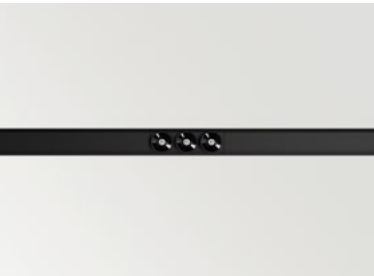

>> MORE INFO


|                                  |                             | P     | CCT   | I     | Flux    |
|----------------------------------|-----------------------------|-------|-------|-------|---------|
| BLACK FOSTER<br>Custom Module 3  | A453-3- ○ - Ⓞ -0-   N   NMG | 6,3W  | 2700K | 700mA | 570 lm  |
|                                  | A453-3- ○ - Ⓞ -1-   N   NMG | 6,3W  | 3000K | 700mA | 630 lm  |
|                                  | A453-3- ○ - Ⓞ -2-   N   NMG | 6,3W  | 4000K | 700mA | 750 lm  |
| BLACK FOSTER<br>Custom Module 5  | A453-4- ○ - Ⓞ -0-   N   NMG | 10,5W | 2700K | 700mA | 950 lm  |
|                                  | A453-4- ○ - Ⓞ -1-   N   NMG | 10,5W | 3000K | 700mA | 1050 lm |
|                                  | A453-4- ○ - Ⓞ -2-   N   NMG | 10,5W | 4000K | 700mA | 1250 lm |
| BLACK FOSTER<br>Custom Module 10 | A453-5- ○ - Ⓞ -0-   N   NMG | 21W   | 2700K | 700mA | 1900 lm |
|                                  | A453-5- ○ - Ⓞ -1-   N   NMG | 21W   | 3000K | 700mA | 2100 lm |
|                                  | A453-5- ○ - Ⓞ -2-   N   NMG | 21W   | 4000K | 700mA | 2500 lm |

48 V |  IP20 | CRI>90 | L80B10 > 60.000 h



| ○ | BEAM | LOR |
|---|------|-----|
| 0 | 38°  | 92% |
| 1 | 19°  | 90% |

| Ⓞ | *OPTIONS |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

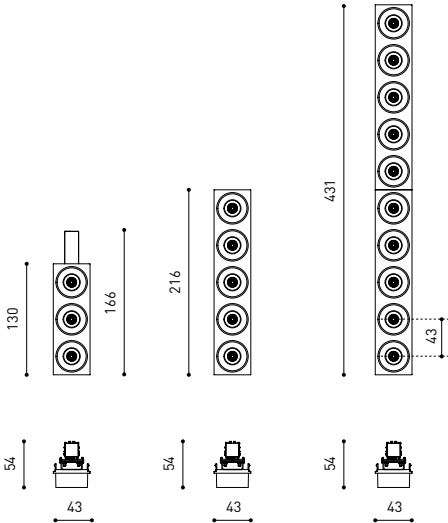

COLOUR | N ■ | NMG ■ | MATERIAL |  AL |  ABS+PC |

Ⓞ » PLEASE CONSULT



>> MORE INFO


|                                         |                                                                                                                                                                                                 | P    | CCT   | I     | Flux   |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|-------|--------|
| BLACK FOSTER<br>Custom Module<br>FIT 27 | A454-0-  -  -0-   WT   NT   G | 5,5W | 2700K | 500mA | 550 lm |
|                                         | A454-0-  -  -1-   WT   NT   G | 5,5W | 3000K | 500mA | 600 lm |
|                                         | A454-0-  -  -2-   WT   NT   G | 5,5W | 4000K | 500mA | 640 lm |

48 V |  IP20 | CRI>90 | L80B10  
> 60.000 h



|  | BEAM | LOR |
|-----------------------------------------------------------------------------------|------|-----|
| 1                                                                                 | 22°  | 84% |
| 2                                                                                 | 37°  | 82% |
| 3                                                                                 | 46°  | 81% |

|  | *OPTIONS |
|-----------------------------------------------------------------------------------|----------|
| 1                                                                                 | No DIM   |
| 2                                                                                 | DIM DALI |

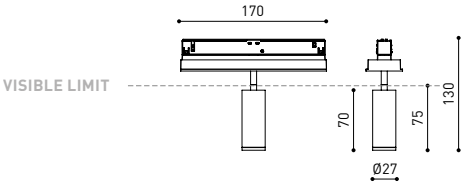

COLOUR | WT  | NT  | G  | MATERIAL |  AL |  PC |

 » PLEASE CONSULT



>> MORE INFO




>> MORE INFO



>> MORE INFO

|                                   |                                  | P    | CCT   | Beam | I     | Flux   | LOR |
|-----------------------------------|----------------------------------|------|-------|------|-------|--------|-----|
| <b>BLACK FOSTER</b><br>Recessed 1 | A319-10- 0-0-   N   W   WN   NMG | 2,1W | 2700K | 38°  | 700mA | 190 lm | 92% |
|                                   | A319-10- 0-1-   N   W   WN   NMG | 2,1W | 3000K | 38°  | 700mA | 210 lm | 92% |
|                                   | A319-10- 0-2-   N   W   WN   NMG | 2,1W | 4000K | 38°  | 700mA | 250 lm | 92% |
|                                   | A319-11- 0-0-   N   WN   NMG     | 2,1W | 2700K | 19°  | 700mA | 190 lm | 90% |
|                                   | A319-11- 0-1-   N   WN   NMG     | 2,1W | 3000K | 19°  | 700mA | 210 lm | 90% |
|                                   | A319-11- 0-2-   N   WN   NMG     | 2,1W | 4000K | 19°  | 700mA | 250 lm | 90% |

220  
240 V~ | IP20 | CRI>90 | L80B10 > 60.000 h



|                                   |                                  | P    | CCT   | Beam | I     | Flux   | LOR |
|-----------------------------------|----------------------------------|------|-------|------|-------|--------|-----|
| <b>BLACK FOSTER</b><br>Recessed 2 | A319-20- 0-0-   N   W   WN   NMG | 4,2W | 2700K | 38°  | 700mA | 380 lm | 92% |
|                                   | A319-20- 0-1-   N   W   WN   NMG | 4,2W | 3000K | 38°  | 700mA | 420 lm | 92% |
|                                   | A319-20- 0-2-   N   W   WN   NMG | 4,2W | 4000K | 38°  | 700mA | 500 lm | 92% |
|                                   | A319-21- 0-0-   N   WN   NMG     | 4,2W | 2700K | 19°  | 700mA | 380 lm | 90% |
|                                   | A319-21- 0-1-   N   WN   NMG     | 4,2W | 3000K | 19°  | 700mA | 420 lm | 90% |
|                                   | A319-21- 0-2-   N   WN   NMG     | 4,2W | 4000K | 19°  | 700mA | 500 lm | 90% |

220  
240 V~ | IP20 | CRI>90 | L80B10 > 60.000 h



|                                   |                                  | P    | CCT   | Beam | I     | Flux   | LOR |
|-----------------------------------|----------------------------------|------|-------|------|-------|--------|-----|
| <b>BLACK FOSTER</b><br>Recessed 3 | A319-30- 0-0-   N   W   WN   NMG | 6,3W | 2700K | 38°  | 700mA | 570 lm | 92% |
|                                   | A319-30- 0-1-   N   W   WN   NMG | 6,3W | 3000K | 38°  | 700mA | 630 lm | 92% |
|                                   | A319-30- 0-2-   N   W   WN   NMG | 6,3W | 4000K | 38°  | 700mA | 750 lm | 92% |
|                                   | A319-31- 0-0-   N   WN   NMG     | 6,3W | 2700K | 19°  | 700mA | 570 lm | 90% |
|                                   | A319-31- 0-1-   N   WN   NMG     | 6,3W | 3000K | 19°  | 700mA | 630 lm | 90% |
|                                   | A319-31- 0-2-   N   WN   NMG     | 6,3W | 4000K | 19°  | 700mA | 750 lm | 90% |


220  
240 V~ | IP20 | CRI>90 | L80B10 > 60.000 h



#### Ⓢ \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM Push |
| 4 | DIM DALI |

DIM PHASE CUT PLEASE CONSULT

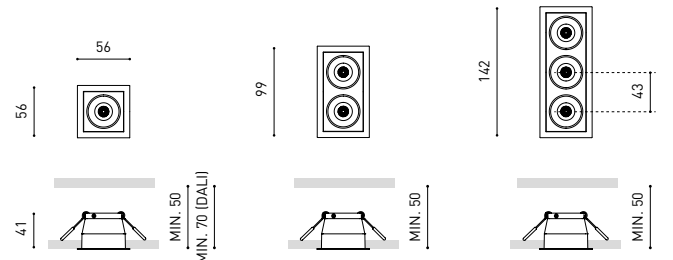

COLOUR | N ■ | W □ | WN ■ | NMG ■

MATERIAL | AL | ABS+PC

"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N, WN & NMG COLOURS

Ⓢ & >> PLEASE CONSULT





>> MORE INFO



>> MORE INFO

|                                          |                                                                           | P     | CCT   | Beam | I     | Flux    | LOR |
|------------------------------------------|---------------------------------------------------------------------------|-------|-------|------|-------|---------|-----|
| <b>BLACK FOSTER</b><br><b>Recessed 5</b> | <b>A319-40-</b> <b>-0-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 10,5W | 2700K | 38°  | 700mA | 950 lm  | 92% |
|                                          | <b>A319-40-</b> <b>-1-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 10,5W | 3000K | 38°  | 700mA | 1050 lm | 92% |
|                                          | <b>A319-40-</b> <b>-2-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 10,5W | 4000K | 38°  | 700mA | 1250 lm | 92% |
|                                          | <b>A319-41-</b> <b>-0-</b>   <b>N</b>   <b>WN</b>   <b>NMG</b>            | 10,5W | 2700K | 19°  | 700mA | 950 lm  | 90% |
|                                          | <b>A319-41-</b> <b>-1-</b>   <b>N</b>   <b>WN</b>   <b>NMG</b>            | 10,5W | 3000K | 19°  | 700mA | 1050 lm | 90% |
|                                          | <b>A319-41-</b> <b>-2-</b>   <b>N</b>   <b>WN</b>   <b>NMG</b>            | 10,5W | 4000K | 19°  | 700mA | 1250 lm | 90% |

220  
240 V~ | **IP20** | **CRI>90** | **L80B10**  
>60.000 h



|                                            |                                                              | P    | CCT   | Beam | I     | Flux    | LOR |
|--------------------------------------------|--------------------------------------------------------------|------|-------|------|-------|---------|-----|
| <b>BLACK FOSTER</b><br><b>Recessed 2x2</b> | <b>A319-50-</b> <b>-0-</b>   <b>N</b>   <b>W</b>   <b>WN</b> | 8,4W | 2700K | 38°  | 700mA | 760 lm  | 92% |
|                                            | <b>A319-50-</b> <b>-1-</b>   <b>N</b>   <b>W</b>   <b>WN</b> | 8,4W | 3000K | 38°  | 700mA | 840 lm  | 92% |
|                                            | <b>A319-50-</b> <b>-2-</b>   <b>N</b>   <b>W</b>   <b>WN</b> | 8,4W | 4000K | 38°  | 700mA | 1000 lm | 92% |
|                                            | <b>A319-51-</b> <b>-0-</b>   <b>N</b>   <b>WN</b>            | 8,4W | 2700K | 19°  | 700mA | 760 lm  | 90% |
|                                            | <b>A319-51-</b> <b>-1-</b>   <b>N</b>   <b>WN</b>            | 8,4W | 3000K | 19°  | 700mA | 840 lm  | 90% |
|                                            | <b>A319-51-</b> <b>-2-</b>   <b>N</b>   <b>WN</b>            | 8,4W | 4000K | 19°  | 700mA | 1000 lm | 90% |


220  
240 V~ | **IP20** | **CRI>90** | **L80B10**  
>60.000 h



#### \*OPTIONS

|          |          |
|----------|----------|
| <b>1</b> | No DIM   |
| <b>2</b> | DIM Push |
| <b>4</b> | DIM DALI |

DIM PHASE CUT PLEASE CONSULT

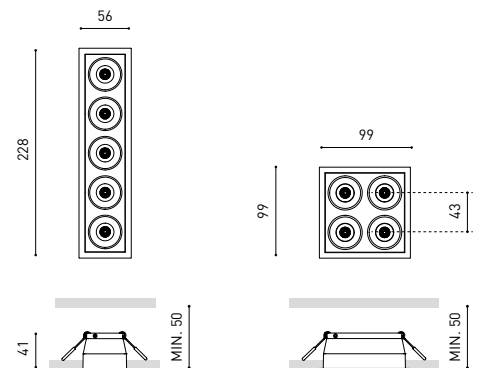



>> MORE INFO

|              |                                |  | P  | CCT   | Beam | I     | Flux   | LOR |
|--------------|--------------------------------|--|----|-------|------|-------|--------|-----|
| SHOT LIGHT S | A462-0- ∅ -00-   N   NMG   WMG |  | 6W | 2700K | 18°  | 500mA | 640 lm | 89% |
|              | A462-0- ∅ -01-   N   NMG   WMG |  | 6W | 3000K | 18°  | 500mA | 670 lm | 89% |
|              | A462-0- ∅ -02-   N   NMG   WMG |  | 6W | 4000K | 18°  | 500mA | 720 lm | 89% |
|              | A462-0- ∅ -10-   N   NMG   WMG |  | 6W | 2700K | 40°  | 500mA | 640 lm | 89% |
|              | A462-0- ∅ -11-   N   NMG   WMG |  | 6W | 3000K | 40°  | 500mA | 670 lm | 89% |
|              | A462-0- ∅ -12-   N   NMG   WMG |  | 6W | 4000K | 40°  | 500mA | 720 lm | 89% |

220  
240 V~ |  IP20 | CRI>90 | L80B10  
> 60.000 h



|                      |                                    |  | P  | CCT   | Beam | I     | Flux   | LOR |
|----------------------|------------------------------------|--|----|-------|------|-------|--------|-----|
| SHOT LIGHT S<br>IP65 | A462-1- ∅ -10-   N   W   NMG   WMG |  | 5W | 2700K | 40°  | 500mA | 640 lm | 84% |
|                      | A462-1- ∅ -11-   N   W   NMG   WMG |  | 5W | 3000K | 40°  | 500mA | 670 lm | 84% |
|                      | A462-1- ∅ -12-   N   W   NMG   WMG |  | 5W | 4000K | 40°  | 500mA | 720 lm | 84% |


220  
240 V~ |  IP65 | CRI>90 | L80B10  
> 60.000 h



∅ \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |
| 3 | DIM Push |

DIM PHASE CUT PLEASE CONSULT

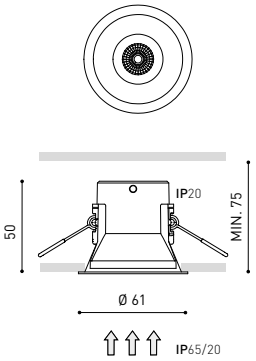


COLOUR | N ■ | W □ | NMG ■■ | WMG □□ |

MATERIAL |  AL |  ABS+PC |

"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N, NMG & WMG COLOURS

(∞) &  >> PLEASE CONSULT

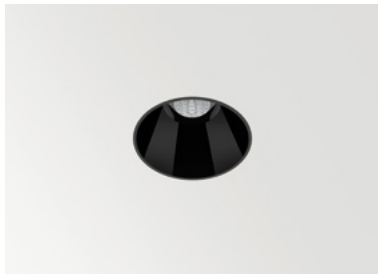

>> MORE INFO

|                                        |                                                               | P  | CCT   | Beam | I     | Flux   | LOR |
|----------------------------------------|---------------------------------------------------------------|----|-------|------|-------|--------|-----|
| <b>SHOT LIGHT S</b><br><b>Trimless</b> | <b>A463-0-</b> <b>-00-</b>   <b>N</b>   <b>NMG</b>            | 6W | 2700K | 18°  | 500mA | 640 lm | 89% |
|                                        | <b>A463-0-</b> <b>-01-</b>   <b>N</b>   <b>NMG</b>            | 6W | 3000K | 18°  | 500mA | 670 lm | 89% |
|                                        | <b>A463-0-</b> <b>-02-</b>   <b>N</b>   <b>NMG</b>            | 6W | 4000K | 18°  | 500mA | 720 lm | 89% |
|                                        | <b>A463-0-</b> <b>-10-</b>   <b>N</b>   <b>W</b>   <b>NMG</b> | 6W | 2700K | 40°  | 500mA | 640 lm | 89% |
|                                        | <b>A463-0-</b> <b>-11-</b>   <b>N</b>   <b>W</b>   <b>NMG</b> | 6W | 3000K | 40°  | 500mA | 670 lm | 89% |
|                                        | <b>A463-0-</b> <b>-12-</b>   <b>N</b>   <b>W</b>   <b>NMG</b> | 6W | 4000K | 40°  | 500mA | 720 lm | 89% |

220  
240 V~ | **IP20** | **CRI>90** | **L80B10**  
**>60.000 h**



#### \*OPTIONS





|          |          |
|----------|----------|
| <b>1</b> | No DIM   |
| <b>2</b> | DIM DALI |
| <b>3</b> | DIM Push |

DIM PHASE CUT PLEASE CONSULT

#### ACCESSORY

**SHOT LIGHT S Trimless Accessory\*\* A463-00-00**

\*\* MANDATORY FOR INSTALLATION



COLOUR | **N** | **W** | **NMG** |

MATERIAL | **AL** | **ABS+PC** |

"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N & NMG COLOURS

& » PLEASE CONSULT




>> MORE INFO

|            |                       | P    | CCT   | I     | Flux   | LOR |
|------------|-----------------------|------|-------|-------|--------|-----|
| LENS LIGHT | A469-0-  -00-   N   W | 5,7W | 2700K | 500mA | 510 lm | 82% |
|            | A469-0-  -01-   N   W | 5,7W | 3000K | 500mA | 540 lm | 82% |
|            | A469-0-  -02-   N   W | 5,7W | 4000K | 500mA | 580 lm | 82% |

220  
240 V~ | IP20 | CRI>90 | L80B10  
> 60.000 h



|   | *OPTIONS |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |
| 3 | DIM Push |

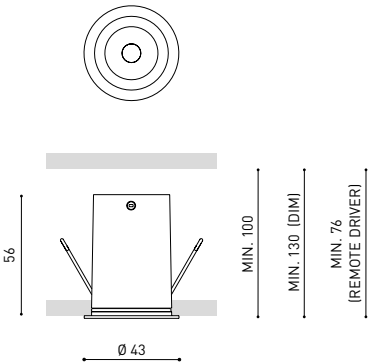

COLOUR | N | W | MATERIAL | AL | ABS+PC |

\*OTHER DIM OPTIONS PLEASE CONSULT  
COLOURS MAY AFFECT THE LIGHTING PARAMETERS

& >> PLEASE CONSULT



>> MORE INFO

|                        |                       | P    | CCT   | I     | Flux   | LOR |
|------------------------|-----------------------|------|-------|-------|--------|-----|
| LENS LIGHT<br>Trimless | A470-0-  -00-   N   W | 5,7W | 2700K | 500mA | 510 lm | 82% |
|                        | A470-0-  -01-   N   W | 5,7W | 3000K | 500mA | 540 lm | 82% |
|                        | A470-0-  -02-   N   W | 5,7W | 4000K | 500mA | 580 lm | 82% |

220  
240 V~ | IP20 | CRI>90 | L80B10  
>60.000 h






\*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |
| 3 | DIM Push |

ACCESSORY

LENS LIGHT Trimless Accessory\*\* A470-00-00

\*\* MANDATORY FOR INSTALLATION

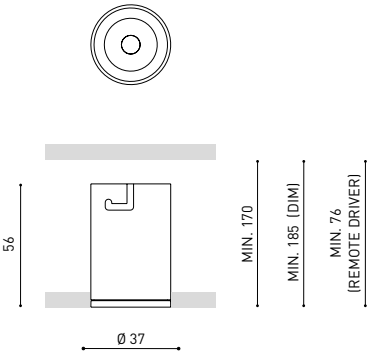


COLOUR | N ■ | W □ |

MATERIAL | AL | ABS+PC |

\*OTHER DIM OPTIONS PLEASE CONSULT  
COLOURS MAY AFFECT THE LIGHTING PARAMETERS

& » PLEASE CONSULT

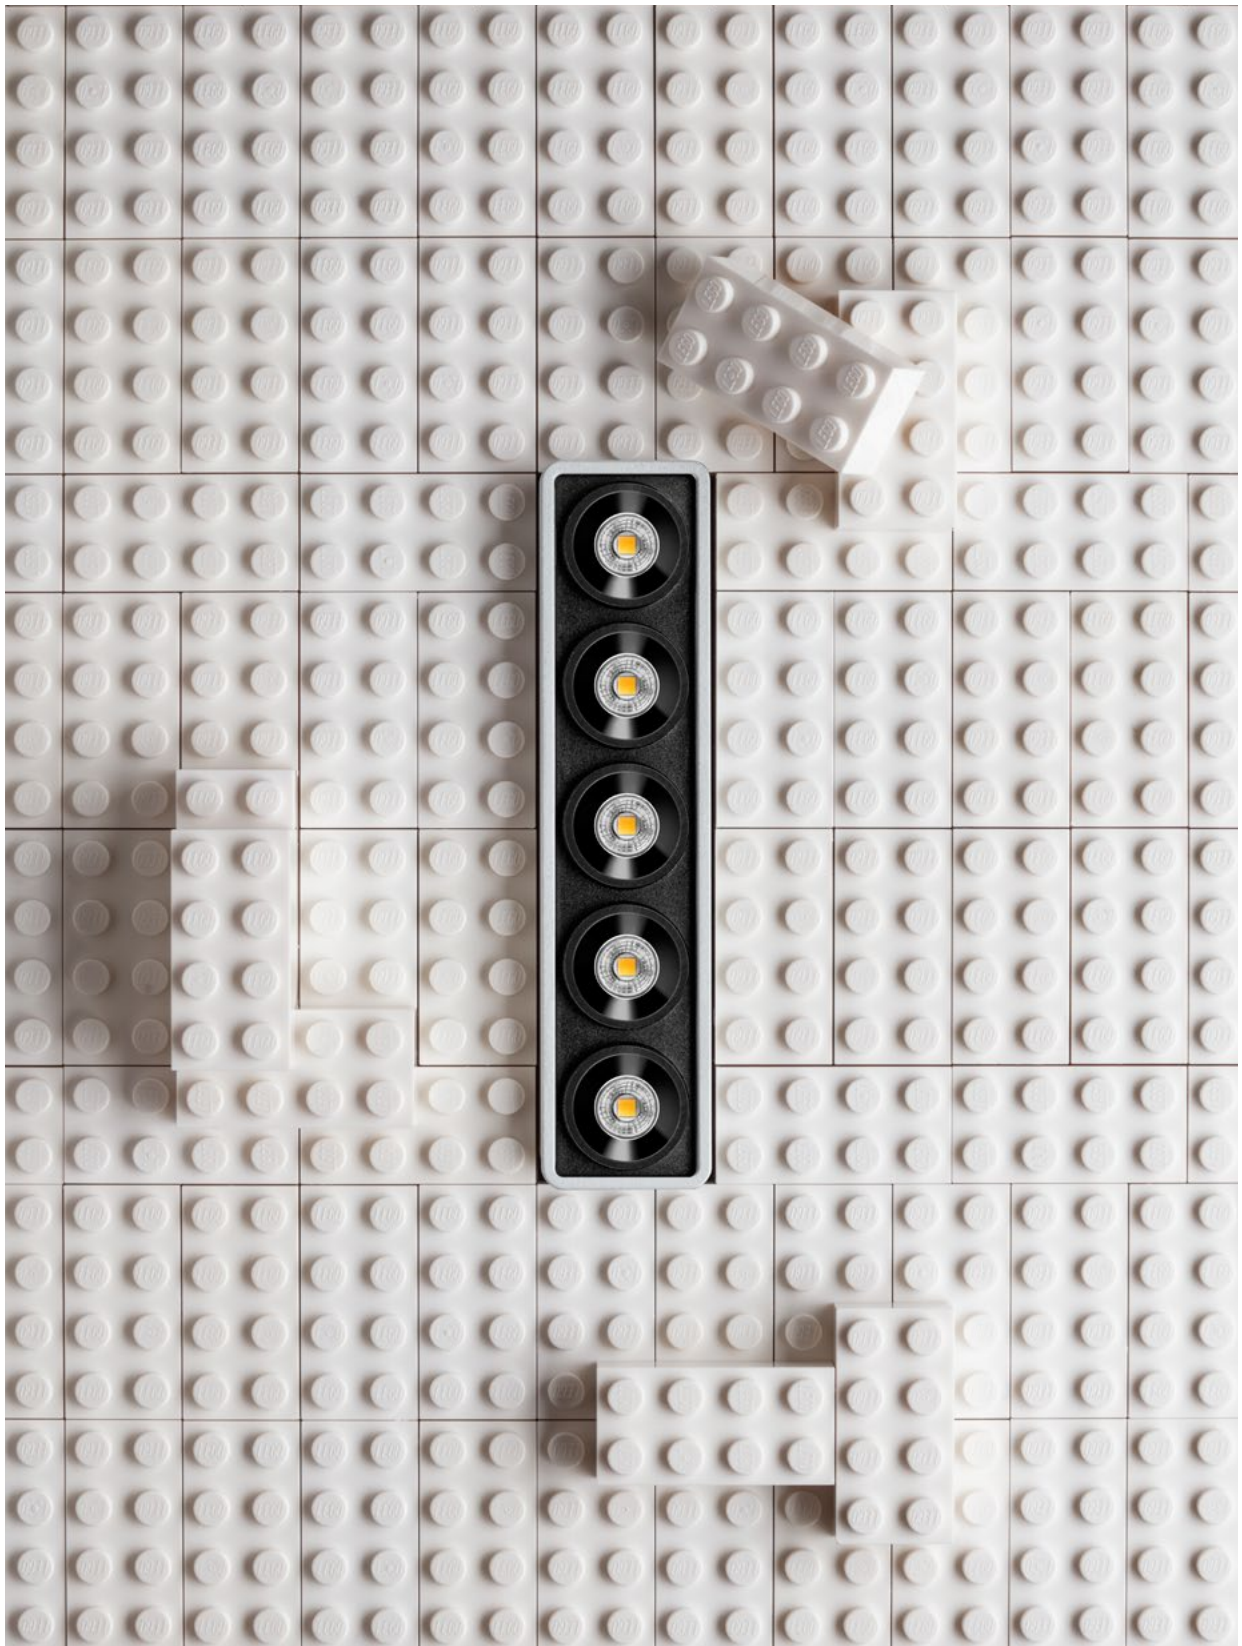





>> MORE INFO



>> MORE INFO



>> MORE INFO

|                                         |                       | P  | CCT   | I     | Flux   | LOR |
|-----------------------------------------|-----------------------|----|-------|-------|--------|-----|
| <b>BLACK FOSTER MICRO<br/>Surface 5</b> | A459-20-00-   NT   WT | 7W | 2700K | 500mA | 775 lm | 87% |
|                                         | A459-20-01-   NT   WT | 7W | 3000K | 500mA | 800 lm | 87% |
|                                         | A459-20-02-   NT   WT | 7W | 4000K | 500mA | 850 lm | 87% |

III IP20 | CRI>90 | L90B10  
>60.000h



|                                           |                       | P    | CCT   | I     | Flux   | LOR |
|-------------------------------------------|-----------------------|------|-------|-------|--------|-----|
| <b>BLACK FOSTER MICRO<br/>Surface 2x2</b> | A459-30-00-   NT   WT | 5,6W | 2700K | 500mA | 620 lm | 87% |
|                                           | A459-30-01-   NT   WT | 5,6W | 3000K | 500mA | 640 lm | 87% |
|                                           | A459-30-02-   NT   WT | 5,6W | 4000K | 500mA | 680 lm | 87% |

III IP20 | CRI>90 | L90B10  
>60.000h




|                                           |                       | P   | CCT   | I     | Flux    | LOR |
|-------------------------------------------|-----------------------|-----|-------|-------|---------|-----|
| <b>BLACK FOSTER MICRO<br/>Surface 3x3</b> | A459-40-00-   NT   WT | 10W | 2700K | 400mA | 1170 lm | 87% |
|                                           | A459-40-01-   NT   WT | 10W | 3000K | 400mA | 1200 lm | 87% |
|                                           | A459-40-02-   NT   WT | 10W | 4000K | 400mA | 1300 lm | 87% |

III IP20 | CRI>90 | L90B10  
>60.000h



|        |            | Black Foster Micro<br>Surface 5 | Black Foster Micro<br>Surface 2x2 | Black Foster Micro<br>Surface 3x3 |
|--------|------------|---------------------------------|-----------------------------------|-----------------------------------|
| ON/OFF | 0434-00-42 | 1 to 2                          | 1 to 3                            |                                   |
|        | 0434-01-53 |                                 |                                   | 1                                 |
| DALI   | 0434-00-44 | 1 to 3                          | 1 to 3                            |                                   |
|        | 0434-01-54 |                                 |                                   | 1                                 |

220 V~ | DRIVER MUST BE PLACED ON REMOTE  
240

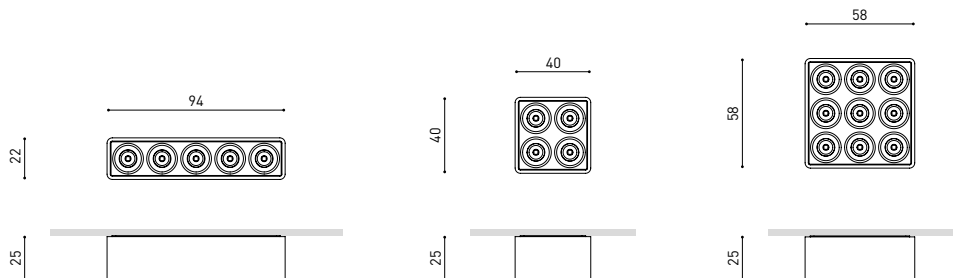

COLOUR | NT ■ | WT □ | MATERIAL | AL | ABS+PC |

\* OTHER DIM OPTIONS PLEASE CONSULT

» PLEASE CONSULT





>> MORE INFO

#### ⌘ \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |
| 3 | DIM Push |

#### FINISHING \*\*

| Lamp | Cable | Base |
|------|-------|------|
| N ■  | N ■   | NT ■ |
| BG ■ | N ■   | NT ■ |

|      |                         | P     | CCT   | I     | Flux    | LOR |
|------|-------------------------|-------|-------|-------|---------|-----|
| LOOP | A473-10- ⌘ -0-   N   BG | 26,5W | 2700K | 700mA | 2800 lm | 38% |
|      | A473-10- ⌘ -1-   N   BG | 26,5W | 3000K | 700mA | 3060 lm | 38% |

220 V~ | IP20 | CRI>90 | L80B10 > 60.000h



|           |                         |       |       |       |         |     |
|-----------|-------------------------|-------|-------|-------|---------|-----|
| LOOP Base | A473-20- ⌘ -0-   N   BG | 26,5W | 2700K | 700mA | 2800 lm | 38% |
|           | A473-20- ⌘ -1-   N   BG | 26,5W | 3000K | 700mA | 3060 lm | 38% |

220 V~ | IP20 | CRI>90 | L80B10 > 60.000h




|               |                         |       |       |       |         |     |
|---------------|-------------------------|-------|-------|-------|---------|-----|
| LOOP Indirect | A474-10- ⌘ -0-   N   BG | 26,5W | 2700K | 700mA | 2800 lm | 38% |
|               | A474-10- ⌘ -1-   N   BG | 26,5W | 3000K | 700mA | 3060 lm | 38% |

220 V~ | IP20 | CRI>90 | L80B10 > 60.000h



|                    |                         |       |       |       |         |     |
|--------------------|-------------------------|-------|-------|-------|---------|-----|
| LOOP Indirect Base | A474-20- ⌘ -0-   N   BG | 26,5W | 2700K | 700mA | 2800 lm | 38% |
|                    | A474-20- ⌘ -1-   N   BG | 26,5W | 3000K | 700mA | 3060 lm | 38% |

220 V~ | IP20 | CRI>90 | L80B10 > 60.000h

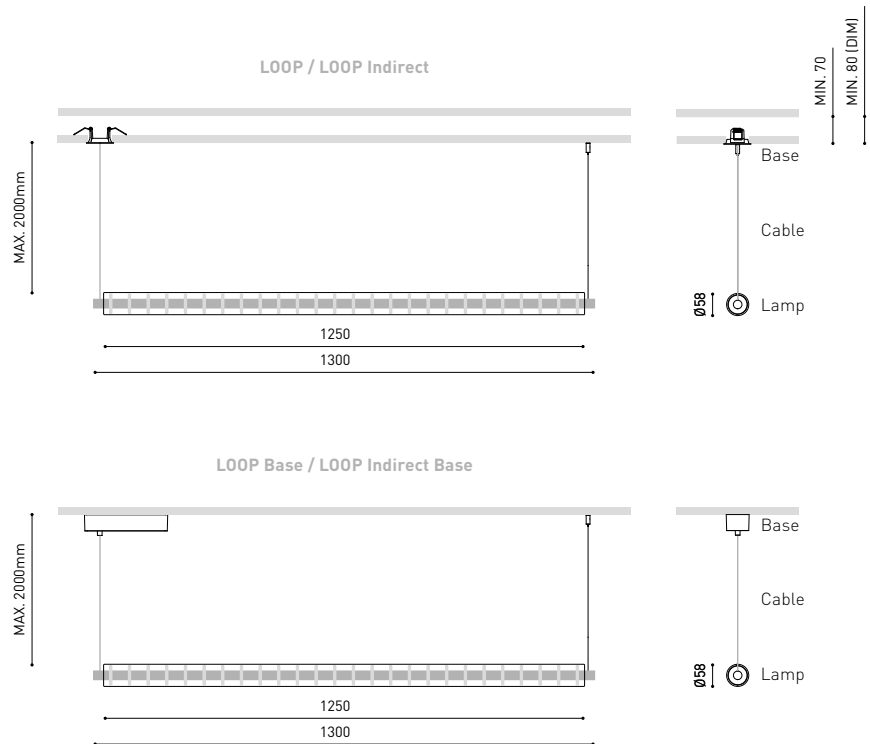

COLOUR | N ■ | NT ■ | BG ■ | MATERIAL | OPTICAL GLASS | OPTICAL PMMA | AL | ABS+PC |

\* OTHER DIM OPTIONS | \*\* OTHER FINISHING COMBINATIONS » PLEASE CONSULT

» PLEASE CONSULT







>> MORE INFO



>> MORE INFO

|          |                                | P   | CCT   | I     | Flux    | LOR |
|----------|--------------------------------|-----|-------|-------|---------|-----|
| REC Slim | A457-00- 00 -0-   WT   NT   PR | 27W | 2700K | 700mA | 3700 lm | 86% |
|          | A457-00- 00 -1-   WT   NT   PR | 27W | 3000K | 700mA | 3800 lm | 86% |
|          | A457-00- 00 -2-   WT   NT   PR | 27W | 4000K | 700mA | 4000 lm | 86% |

220 V~ | IP20 | CRI>90 | L80B10 > 60.000h



#### 00 \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |
| 3 | DIM Push |

|           |                            | CCT   | LOR |
|-----------|----------------------------|-------|-----|
| REC Micro | A461-00-00-   WT   NT   PR | 2700K | 79% |
|           | A461-00-01-   WT   NT   PR | 3000K | 79% |
|           | A461-00-02-   WT   NT   PR | 4000K | 79% |


IP20 | CRI>90 | L80B10 > 60.000h




| *DRIVER OPTIONS                | P     | I     | CCT   | Flux    |
|--------------------------------|-------|-------|-------|---------|
| 0434-00-40<br>1 to 2 Rec Micro | 12,8W | 700mA | 2700K | 1465 lm |
|                                |       |       | 3000K | 1560 lm |
|                                |       |       | 4000K | 1650 lm |
| 0434-01-43<br>1 to 3 Rec Micro | 12,8W | 700mA | 2700K | 1465 lm |
|                                |       |       | 3000K | 1560 lm |
|                                |       |       | 4000K | 1650 lm |
| 0434-00-46<br>1 to 2 Rec Micro | 12,8W | 700mA | 2700K | 1465 lm |
|                                |       |       | 3000K | 1560 lm |
|                                |       |       | 4000K | 1650 lm |
| 0434-01-25<br>1 to 3 Rec Micro | 12,8W | 700mA | 2700K | 1465 lm |
|                                |       |       | 3000K | 1560 lm |
|                                |       |       | 4000K | 1650 lm |

220 V~ | DRIVER MUST BE PLACED ON REMOTE

#### REC Slim



#### REC Micro



COLOUR | WT | NT | PR

MATERIAL | AL | PMMA |

PR: PRIMER COATING FINISHING

» PLEASE CONSULT





>> MORE INFO

|                |                           | P  | CCT   | Flux   | LOR |
|----------------|---------------------------|----|-------|--------|-----|
| YORU Spike 24V | A475-  -0 - 00-   WT   NT | 3W | 2700K | 400 lm | 84% |
|                | A475-  -0 - 01-   WT   NT | 3W | 3000K | 410 lm | 84% |

24 V | IP65 | CRI>90 | L80B10 >60.000 h



TOTAL HEIGHT - H



|   |        |
|---|--------|
| 1 | 400 mm |
| 2 | 500 mm |

#### OPTIONAL ACCESSORY

Connector IP67 0434-01-67 | N |


Connector IP67 T-Shape 0434-01-68 | N |

For cable Ø3,5-7,5mm, section <1,5mm²

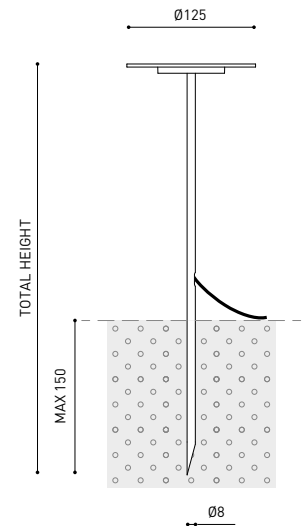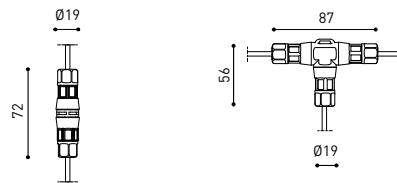


|                        |        |            | P    | V   | D (A x B x C)   |
|------------------------|--------|------------|------|-----|-----------------|
| YORU Spike 24V         | ON/OFF | 0434-01-37 | 60W  | 24V | 180 x 52 x 30mm |
| ** Remote Power Supply |        | 0433-10-22 | 100W | 24V | 295 x 43 x 30mm |

220 V~ | IP20



|                                  |  |            |             |     |                 |
|----------------------------------|--|------------|-------------|-----|-----------------|
| YORU Spike 24V                   |  | 0433-01-32 | DALI / Push | 24V | 181 x 42 x 20mm |
| * Remote Constant Voltage Dimmer |  | 0433-01-33 | CASAMBI     | 24V | 172 x 42 x 20mm |
|                                  |  | 0434-01-64 | WIFI        | 24V | 105 x 44 x 23mm |

24 V | IP20



#### DROP VOLTAGE TABLE

|           |                     | CABLE LENGHT (m) |     |     |      |
|-----------|---------------------|------------------|-----|-----|------|
| POWER (W) | CABLE SECTION (mm²) | <25              | <50 | <75 | <100 |
| 60        | 0,75                | ✓                | ✓   | X   | X    |
|           | 1,5                 | ✓                | ✓   | ✓   | ✓    |
| 100       | 0,75                | ✓                | X   | X   | X    |
|           | 1,5                 | ✓                | ✓   | ✓   | X    |


COLOUR | WT ☐ | NT ☐ |

MATERIAL | INOX AISI 304 | AL | PC |



## MINIMAL TRACK TRIMLESS

&gt;&gt; MORE INFO



## MINIMAL TRACK 24V Trimless

Profile 2m A467-02-00- | N |




## MINIMAL TRACK 24V Trimless

Rubber Cable n x 1m A467-00-01- | N |

n = Total Length of System.

24 V | Max. 4A


INSTALLATION GUIDE  
<https://youtu.be/KnedJbKp7oo>

## MINIMAL TRACK 24V Trimless

## Corner 90° 1 Plane

A467-00-02- | N |


Cable Length = 140mm.



## MINIMAL TRACK 24V Trimless

## Corner 90° 1 Plane Connector

A467-00-03- | N |




## MINIMAL TRACK 24V Trimless

## Corner 90° 2 Planes

A467-00-04- | N |

Cable Length = 200mm.



## MINIMAL TRACK 24V Trimless

## End Caps

A467-00-05- | N |

Two End Caps Included



## MINIMAL TRACK 24V Trimless

## Straight Joiner


A467-00-06



## MINIMAL TRACK 24V Trimless

## Connection Box

A467-00-07- | N |

MINIMAL TRACK 24V  
Remote Power Supply

ON/OFF

0434-01-37

P

V

D (A x B x C)

60W

24V


180 x 52 x 30mm

0433-10-22

100W

24V

295 x 43 x 30mm

220V~  
240V

## MINIMAL TRACK 24V

## Remote Constant Voltage Dimmer



0433-01-32

DALI / Push

24V

181 x 42 x 20mm

0433-01-33

CASAMBI

24V


172 x 42 x 20mm

0434-01-64

WIFI

24V

105 x 44 x 23mm





24V

## DROP VOLTAGE TABLE

| POWER (W) | CABLE SECTION (mm <sup>2</sup> ) | CABLE LENGTH (m) |     |     |     |
|-----------|----------------------------------|------------------|-----|-----|-----|
|           |                                  | <5               | <10 | <20 | <30 |
|           |                                  | TRACK LENGTH (m) |     |     |     |
| 60        | 0,75                             | 30               | 30  | 20  | 10  |
|           | 1,5                              | 30               | 30  | 30  | 20  |
| 100       | 0,75                             | 20               | 10  | X   | X   |
|           | 1,5                              | 20               | 20  | 10  | X   |

Reduce 5 meters per each 'Corner 90° 1 Plane CONNECTOR' used.

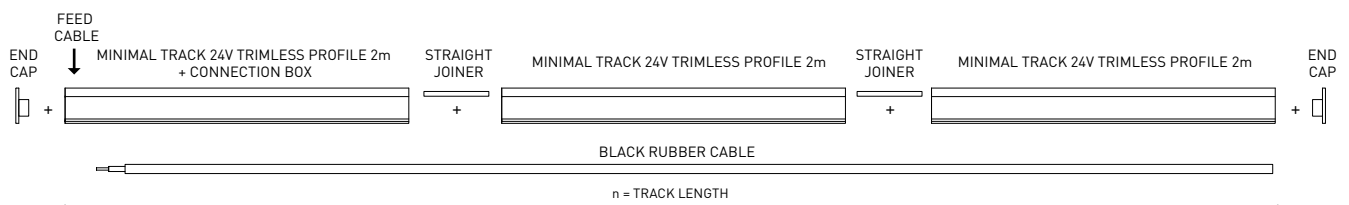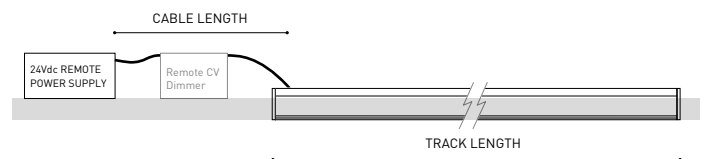

COLOUR | N ■ |

DIM OPTIONS PLEASE CONSULT



>> MORE INFO

|                                                   |                       | P  | CCT   | I     | Flux   | LOR |
|---------------------------------------------------|-----------------------|----|-------|-------|--------|-----|
| <b>BLACK FOSTER</b><br><b>Micro 24V Surface 5</b> | A468-20-10-   NT   WT | 7W | 2700K | 500mA | 775 lm | 87% |
|                                                   | A468-20-11-   NT   WT | 7W | 3000K | 500mA | 800 lm | 87% |
|                                                   | A468-20-12-   NT   WT | 7W | 4000K | 500mA | 850 lm | 87% |


24 V |  IP20 | CRI>90 | L90B10 >60.000 h

 MacAdam Step 3

 INCL

 MINIMAL TRACK

 37°

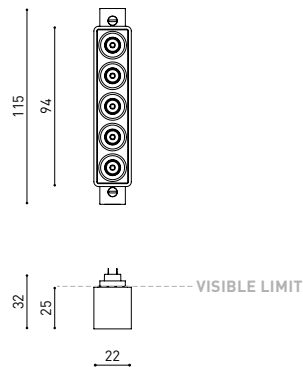

COLOUR | NT ■ | WT □ | MATERIAL |  AL |  ABS+PC |

 » PLEASE CONSULT





>> MORE INFO

|                                |             |         | P     | CCT   | Flux   | LOR | L      |
|--------------------------------|-------------|---------|-------|-------|--------|-----|--------|
| TRACK 48V + IND. LIGHT<br>1400 | A466-01-20- | NT   WT | 18,3W | 2700K | 2320lm | 70% | 1402mm |
|                                | A466-01-21- | WT   NT | 18,3W | 3000K | 2380lm | 70% | 1402mm |
|                                | A466-01-22- | WT   NT | 18,3W | 4000K | 2585lm | 70% | 1402mm |
| TRACK 48V + IND. LIGHT<br>2800 | A466-02-20- | WT   NT | 39,2W | 2700K | 5210lm | 70% | 2802mm |
|                                | A466-02-21- | WT   NT | 39,2W | 3000K | 5360lm | 70% | 2802mm |
|                                | A466-02-22- | WT   NT | 39,2W | 4000K | 5820lm | 70% | 2802mm |

48 V | III | IP20 | CRI>90 | L90B5  
>50.000 h




#### TRACK 48V + INDIRECT LIGHT 1400 / 2800




#### Indirect Light Suspension kit 48V (2 units)

A466-00-03- | NT | WT |



#### Suspension straight joiner kit 48V

A466-00-04- | NT | WT |



#### Suspension 90° Corner joiner kit 48V

A466-00-05- | NT | WT |

III \*Electrical connection not included.


#### DROP VOLTAGE TABLE

| POWER [W] | CABLE SECTION [mm²] | CABLE LENGTH (m) |    |    |    |
|-----------|---------------------|------------------|----|----|----|
|           |                     | 5                | 10 | 20 | 30 |
| 100       | 0,75                | 50               | 50 | X  | X  |
|           | 1,5                 | 50               | 50 | 40 | 25 |
| 150       | 0,75                | 40               | 15 | X  | X  |
|           | 1,5                 | 50               | 40 | 20 | X  |

For calculations, you must consider indirect light power.

|                                      | P                   | V        | D (A x B x C)   |
|--------------------------------------|---------------------|----------|-----------------|
| CONSTANT VOLTAGE<br>LED POWER SUPPLY | 0434-01-61*   N   W | 100W 48V | 298 x 19 x 16mm |
|                                      | 0434-01-62          | 150W 48V | 350 x 30 x 18mm |


220 V~ 240 V~ \*To be installed inside the track.

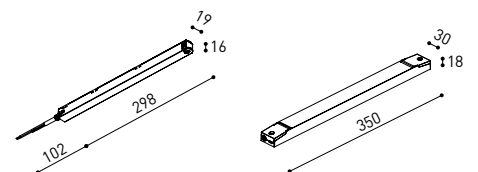

COLOUR | NT ■ | N ■ | WT □ |


MATERIAL | AL | PC |

» PLEASE CONSULT




Live-End Connector 48V

A338-00-01- | N | W |



L-JOINT Connector 48V

A338-00-12- | N | W |




Corner 90° Connector One Plane 48V

A338-00-24- | N | W |




End 48V

A338-00-06- | NT | WT |




Central Connector 48V

A338-00-02- | N | W |



Wireless Control 48V

0434-01-31- | N | W | Casambi/AAG Stucchi App




Cover Gap 1m 48V

A338-00-30- | N | W |



End Feed 48V



A338-00-07- | NT | WT |



Wired Power Supply Case 48V

A338-00-25- | NT | WT | 150W NO DIM

A338-00-26- | NT | WT | 150W DIM



Suspension Feed Kit

A338-00-16- | N | W | NO DIM

A338-00-17- | N | W | DIM

For remote power supply

A338-00-27- | N | W | NO DIM

A338-00-28- | N | W | DIM

For power supply inside the track


MAINS TRIMLESS



MAINS THICK TRIMLESS



STEEL CABLE TRIMLESS



WIRE TRIMLESS ACCESSORIES

FEED


Mains Trimless\*

A023-00-01- | W | N |



Mains Thick Trimless\*

A023-00-02- | W | N |

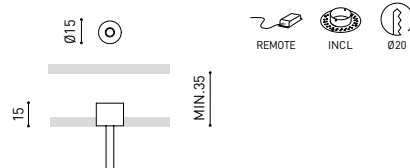

FASTENING

Steel Cable Trimless\*

A023-00-05- | W | N |



COLOUR | WT □ | NT ■ | W □ | N ■ |

MATERIAL | AL □ | PC □ |

\* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT

» PLEASE CONSULT



48V SYSTEM

# WIZ 48V



>> MORE INFO

| WIZ 48V                                  | +RE | P     | CCT   | I     | Flux    | LOR |
|------------------------------------------|-----|-------|-------|-------|---------|-----|
| A465-0-  -10-   WT   NT   WTW   NTW   -S |     | 12,4W | 2700K | 350mA | 1470 lm | 86% |
| A465-0-  -11-   WT   NT   WTW   NTW   -S |     | 12,4W | 3000K | 350mA | 1530 lm | 86% |
| A465-0-  -12-   WT   NT   WTW   NTW   -S |     | 12,4W | 4000K | 350mA | 1550 lm | 86% |

48 V | IP20 | CRI>90 | L80B10 > 60.000 h



| *OPTIONS |          |
|----------|----------|
| 1        | No DIM   |
| 2        | DIM DALI |


| +RE | REF. ENDING     | EXAMPLE      |
|-----|-----------------|--------------|
|     | Track 48V       | A4650110WT   |
| -S  | Track 48V Short | A4650110WT-S |

## OPTIONAL

### WIZ High Chromatic LED

NOT SOLD SEPARATELY  
AFFECTS THE LIGHTING PARAMETERS

| FINISHING | Body | Lampshade | Adaptor |
|-----------|------|-----------|---------|
| WT        | WT   | N         | N       |
| NT        | NT   | N         | N       |
| WTW       | WT   | N         | W       |
| NTW       | NT   | N         | W       |

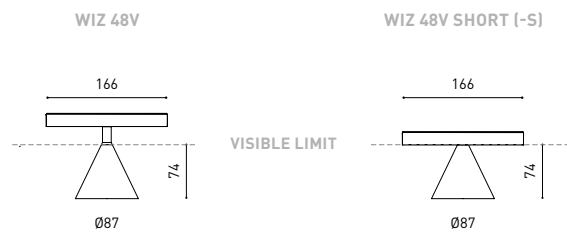

COLOUR | WT | NT | W | N |


MATERIAL | AL | ABS+PC |

\* OTHER DIM OPTIONS PLEASE CONSULT

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT





## ACCESSORY

# TRIMLESS TOOL

>> MORE INFO




### INSTALLATION GUIDE

[https://youtu.be/sa\\_xAgj4ji4](https://youtu.be/sa_xAgj4ji4)

#### OPTIONAL ACCESSORY

**TRIMLESS TOOL D16 X D34mm A478-00-00**




#### Suitable for:

Magnetic Connector | A435-01-00:

- FIT 20 | A431-00-XX
- FIT 27 | A432-01-XX
- iO Micro | A434-01-XX
- PLUS Micro | A433-01-XX
- SIX XS | A429-01-XX
- TOP Micro | A430-01-XX

#### OPTIONAL ACCESSORY

**TRIMLESS TOOL D43 X D70mm A478-00-02**




#### Suitable for:

Alaska Trimless Accessory | A401-10-XX  
 Shot Light Trimless Accessory | A269-00-00  
 Shot Light Trimless Accessory 2 | A269-00-01  
 Shot Light Trimless Accessory 3 | A269-00-02  
 Lens Light Trimless Accessory | A470-00-00

#### OPTIONAL ACCESSORY

**TRIMLESS TOOL D79 X D86mm A478-00-04**




#### Suitable for:

Shot Light S Flex | A477-00-00

#### OPTIONAL ACCESSORY

**TRIMLESS TOOL D20 X D52mm A478-00-01**



#### Suitable for:


Alaska Big | A455-XX-XX

Wire Trimless Accessory | A023-XX-XX:

- Acc. Mains Trimless | A023-00-01
- Acc. Mains Thick Trimless | A023-00-02
- Acc. Coaxial Trimless | A023-00-03
- Acc. Unipolar Trimless | A023-00-04
- Acc. Steel Cable Trimless | A023-00-05
- Acc. Steel Cable Regulator Trimless | A023-00-06

#### OPTIONAL ACCESSORY

**TRIMLESS TOOL D59 X D100mm A478-00-03**




#### Suitable for:

Alaska Big Trimless Accessory | A426-10-00  
 Shot Light S Trimless Accessory | A463-00-00

#### OPTIONAL ACCESSORY

**TRIMLESS TOOL D79 X D120mm A478-00-05**



#### Suitable for:

Shot Light M Trimless Accessory | A298-00-00



>> MORE INFO

|                   |         |        |    |    |  | P     | CCT   | Beam | I     | Flux    | LOR |
|-------------------|---------|--------|----|----|--|-------|-------|------|-------|---------|-----|
| FIT 65<br>Surface | A471-0- | Ⓢ -11- | WT | NT |  | 10,3W | 3000K | 18°  | 300mA | 1300 lm | 90% |
|                   | A471-0- | Ⓢ -12- | WT | NT |  | 10,3W | 4000K | 18°  | 300mA | 1320 lm | 90% |
|                   | A471-0- | Ⓢ -21- | WT | NT |  | 10,3W | 3000K | 26°  | 300mA | 1300 lm | 88% |
|                   | A471-0- | Ⓢ -22- | WT | NT |  | 10,3W | 4000K | 26°  | 300mA | 1320 lm | 88% |
|                   | A471-0- | Ⓢ -31- | WT | NT |  | 10,3W | 3000K | 36°  | 300mA | 1300 lm | 84% |
|                   | A471-0- | Ⓢ -32- | WT | NT |  | 10,3W | 4000K | 36°  | 300mA | 1320 lm | 84% |

220  
240 V~ |  IP20 | CRI>90 | L80B10  
> 60.000 h




Ⓢ \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

OPTIONAL ACCESSORY

FIT 65 Anti-glare Honeycomb Louver \*\* A356-00-00

NOT SOLD SEPARATELY



COLOUR | WT ☐ | NT ☒ |

MATERIAL |  AL |  PC |

\*\* ACCESSORY AFFECTS THE LIGHTING PARAMETERS

 » PLEASE CONSULT



>> MORE INFO

|                   |                         | P   | CCT   | Beam | I     | Flux    | LOR |
|-------------------|-------------------------|-----|-------|------|-------|---------|-----|
| FIT 80<br>Surface | A472-0-  -11-   WT   NT | 19W | 3000K | 19°  | 550mA | 2500 lm | 90% |
|                   | A472-0-  -12-   WT   NT | 19W | 4000K | 19°  | 550mA | 2540 lm | 90% |
|                   | A472-0-  -21-   WT   NT | 19W | 3000K | 28°  | 550mA | 2500 lm | 84% |
|                   | A472-0-  -22-   WT   NT | 19W | 4000K | 28°  | 550mA | 2540 lm | 84% |
|                   | A472-0-  -31-   WT   NT | 19W | 3000K | 37°  | 550mA | 2500 lm | 85% |
|                   | A472-0-  -32-   WT   NT | 19W | 4000K | 37°  | 550mA | 2540 lm | 85% |

220  
240 V~ | IP20 | CRI>90 | L80B10  
> 60.000 h




\*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

OPTIONAL ACCESSORY

FIT 80 Anti-glare Honeycomb Louver \*\* A357-00-00

NOT SOLD SEPARATELY



COLOUR | WT | NT

MATERIAL | AL | PC |

\*\* ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



>> MORE INFO

|              |             |    |    |   |  | P    | CCT   | BEAM | I     | Flux   | LOR |
|--------------|-------------|----|----|---|--|------|-------|------|-------|--------|-----|
| FIT 27 24V 1 | A399-00-10- | WT | NT | G |  | 4,5W | 2700K | 22°  | 400mA | 440 lm | 84% |
|              | A399-00-11- | WT | NT | G |  | 4,5W | 3000K | 22°  | 400mA | 475 lm | 84% |
|              | A399-00-20- | WT | NT | G |  | 4,5W | 2700K | 37°  | 400mA | 440 lm | 82% |
|              | A399-00-21- | WT | NT | G |  | 4,5W | 3000K | 37°  | 400mA | 475 lm | 82% |
|              | A399-00-30- | WT | NT | G |  | 4,5W | 2700K | 46°  | 400mA | 440 lm | 81% |
|              | A399-00-31- | WT | NT | G |  | 4,5W | 3000K | 46°  | 400mA | 475 lm | 81% |
| FIT 27 24V 2 | A399-10-10- | WT | NT | G |  | 5,5W | 2700K | 22°  | 500mA | 550 lm | 84% |
|              | A399-10-11- | WT | NT | G |  | 5,5W | 3000K | 22°  | 500mA | 600 lm | 84% |
|              | A399-10-20- | WT | NT | G |  | 5,5W | 2700K | 37°  | 500mA | 550 lm | 82% |
|              | A399-10-21- | WT | NT | G |  | 5,5W | 3000K | 37°  | 500mA | 600 lm | 82% |
|              | A399-10-30- | WT | NT | G |  | 5,5W | 2700K | 46°  | 500mA | 550 lm | 81% |
|              | A399-10-31- | WT | NT | G |  | 5,5W | 3000K | 46°  | 500mA | 600 lm | 81% |

24 V |  IP20 | CRI>90 |  L80B10 > 60.000 h

 MacAdam Step 2


 INCL

 MINIMAL TRACK

 355°

 90°

 22° / 37° / 46°

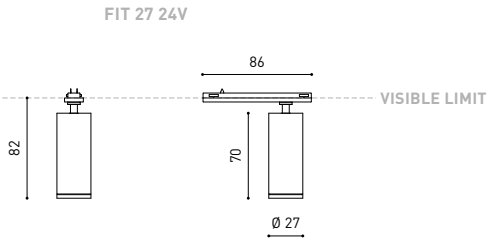


COLOUR | WT  | NT  | G  |

MATERIAL |  AL |  PC |


 » PLEASE CONSULT





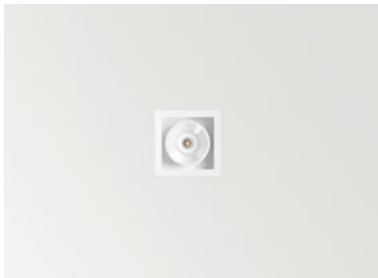

>> MORE INFO

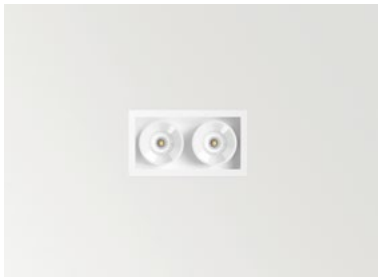

>> MORE INFO



>> MORE INFO

|                                          |                                                                           | P    | CCT   | I     | Flux   | LOR |
|------------------------------------------|---------------------------------------------------------------------------|------|-------|-------|--------|-----|
| <b>BLACK FOSTER</b><br><b>Recessed 1</b> | <b>A319-10-</b> <b>-0-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 2,1W | 2700K | 700mA | 190 lm | 92% |
|                                          | <b>A319-10-</b> <b>-1-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 2,1W | 3000K | 700mA | 210 lm | 92% |
|                                          | <b>A319-10-</b> <b>-2-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 2,1W | 4000K | 700mA | 250 lm | 92% |

220  
240 V~ | **IP20** | **CRI>90** | **L80B10**  
**>60.000h**



|                                          |                                                                           | P    | CCT   | I     | Flux   | LOR |
|------------------------------------------|---------------------------------------------------------------------------|------|-------|-------|--------|-----|
| <b>BLACK FOSTER</b><br><b>Recessed 2</b> | <b>A319-20-</b> <b>-0-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 4,2W | 2700K | 700mA | 380 lm | 92% |
|                                          | <b>A319-20-</b> <b>-1-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 4,2W | 3000K | 700mA | 420 lm | 92% |
|                                          | <b>A319-20-</b> <b>-2-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 4,2W | 4000K | 700mA | 500 lm | 92% |

220  
240 V~ | **IP20** | **CRI>90** | **L80B10**  
**>60.000h**



|                                          |                                                                           | P    | CCT   | I     | Flux   | LOR |
|------------------------------------------|---------------------------------------------------------------------------|------|-------|-------|--------|-----|
| <b>BLACK FOSTER</b><br><b>Recessed 3</b> | <b>A319-30-</b> <b>-0-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 6,3W | 2700K | 700mA | 570 lm | 92% |
|                                          | <b>A319-30-</b> <b>-1-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 6,3W | 3000K | 700mA | 630 lm | 92% |
|                                          | <b>A319-30-</b> <b>-2-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 6,3W | 4000K | 700mA | 750 lm | 92% |


220  
240 V~ | **IP20** | **CRI>90** | **L80B10**  
**>60.000h**



#### \*OPTIONS

|          |          |
|----------|----------|
| <b>1</b> | No DIM   |
| <b>2</b> | DIM Push |
| <b>4</b> | DIM DALI |

DIM PHASE CUT PLEASE CONSULT

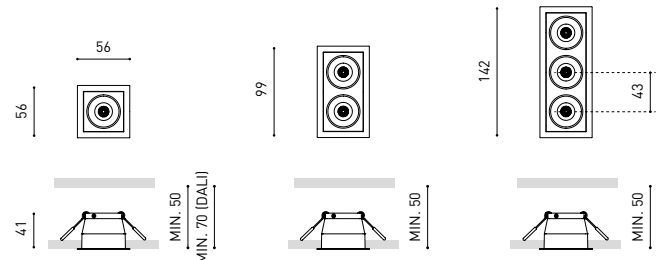

COLOUR | **N** | **W** | **WN** | **NMG**

MATERIAL | **AL** | **ABS+PC**

"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N, WN & NMG COLOURS

& >> PLEASE CONSULT



>> MORE INFO



>> MORE INFO

|                                          |                                                                           | P     | CCT   | I     | Flux    | LOR |
|------------------------------------------|---------------------------------------------------------------------------|-------|-------|-------|---------|-----|
| <b>BLACK FOSTER</b><br><b>Recessed 5</b> | <b>A319-40-</b> <b>-0-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 10,5W | 2700K | 700mA | 950 lm  | 92% |
|                                          | <b>A319-40-</b> <b>-1-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 10,5W | 3000K | 700mA | 1050 lm | 92% |
|                                          | <b>A319-40-</b> <b>-2-</b>   <b>N</b>   <b>W</b>   <b>WN</b>   <b>NMG</b> | 10,5W | 4000K | 700mA | 1250 lm | 92% |

220  
240 V~ | IP20 | CRI>90 | L80B10  
>60.000h



|                                            |                                                              | P    | CCT   | I     | Flux    | LOR |
|--------------------------------------------|--------------------------------------------------------------|------|-------|-------|---------|-----|
| <b>BLACK FOSTER</b><br><b>Recessed 2x2</b> | <b>A319-50-</b> <b>-0-</b>   <b>N</b>   <b>W</b>   <b>WN</b> | 8,4W | 2700K | 700mA | 760 lm  | 92% |
|                                            | <b>A319-50-</b> <b>-1-</b>   <b>N</b>   <b>W</b>   <b>WN</b> | 8,4W | 3000K | 700mA | 840 lm  | 92% |
|                                            | <b>A319-50-</b> <b>-2-</b>   <b>N</b>   <b>W</b>   <b>WN</b> | 8,4W | 4000K | 700mA | 1000 lm | 92% |


220  
240 V~ | IP20 | CRI>90 | L80B10  
>60.000h



#### \*OPTIONS

|          |          |
|----------|----------|
| <b>1</b> | No DIM   |
| <b>2</b> | DIM Push |
| <b>4</b> | DIM DALI |

DIM PHASE CUT PLEASE CONSULT

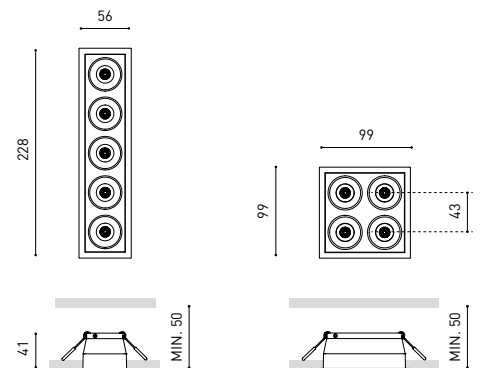

COLOUR | **N** | **W** | **WN** | **NMG** |

MATERIAL | **AL** | **ABS+PC** |


"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N, WN & NMG COLOURS

& » PLEASE CONSULT




## MINIMAL TRACK

&gt;&gt; MORE INFO



MINIMAL TRACK 24V Profile 2m

A384-02-00- | N | WT |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |

n = Total Length of System.

24V

Max. 4A




INSTALLATION GUIDE

<https://youtu.be/KnedJbKp7oo>

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N | WT |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded

A384-00-03- | N | WT |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N | WT |

Cable Length = 100mm.




MINIMAL TRACK 24V End Cap

A384-00-05- | N | WT |



MINIMAL TRACK 24V Connection Box

A384-00-06- | N | WT |



|                                    |        |                       | P    | V   | D (A x B x C)   |
|------------------------------------|--------|-----------------------|------|-----|-----------------|
| MINIMAL TRACK 24V Power Supply Box | ON/OFF | A384-00-07-   NT   WT | 40W  | 24V | 280 x 30 x 24mm |
|                                    |        | A384-00-08-   NT   WT | 100W | 24V | 280 x 30 x 24mm |




220 V~  
240 V~ | Included ON/OFF 24Vdc Power Supply.

|                                       |        |            |      |     |                 |
|---------------------------------------|--------|------------|------|-----|-----------------|
| MINIMAL TRACK 24V Remote Power Supply | ON/OFF | 0434-01-37 | 60W  | 24V | 180 x 52 x 30mm |
|                                       |        | 0433-10-22 | 100W | 24V | 295 x 43 x 30mm |

220 V~  
240 V~


|                                                  |  |            |             |     |                 |
|--------------------------------------------------|--|------------|-------------|-----|-----------------|
| MINIMAL TRACK 24V Remote Constant Voltage Dimmer |  | 0433-01-32 | DALI / Push | 24V | 181 x 42 x 20mm |
|                                                  |  | 0433-01-33 | CASAMBI     | 24V | 172 x 42 x 20mm |
|                                                  |  | 0434-01-64 | WIFI        | 24V | 105 x 44 x 23mm |

24V



DROP VOLTAGE TABLE

| POWER (W) | CABLE SECTION (mm²) | CABLE LENGTH (m) |     |     |     |
|-----------|---------------------|------------------|-----|-----|-----|
|           |                     | <5               | <10 | <20 | <30 |
| 40        | 0,75                | 30               | 30  | 30  | 30  |
|           | 1,5                 | 30               | 30  | 30  | 30  |
| 60        | 0,75                | 30               | 30  | 20  | 10  |
|           | 1,5                 | 30               | 30  | 30  | 20  |
| 100       | 0,75                | 20               | 10  | X   | X   |
|           | 1,5                 | 20               | 20  | 10  | X   |

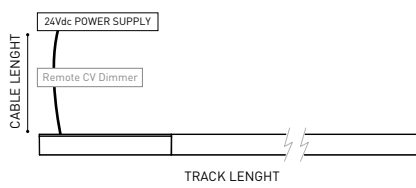
CONNECTION BOX /  
POWER SUPPLY BOX

MINIMAL TRACK 24V PROFILE 2m

MINIMAL TRACK 24V PROFILE 2m

MINIMAL TRACK 24V PROFILE 2m

END CAP



COLOUR | N ■ | NT ■ | WT □ |

DIM OPTIONS PLEASE CONSULT




OPTIONAL ACCESSORIES

WIRE TRIMLESS Accessories



Coaxial Trimless A023-00-03- | W | N |

FASTENERS NOT AVAILABLE.



COAXIAL TRIMLESS





#### MINIMAL TRACK 24V Suspension

Profile 2m

A384-02-00- | N | WT |

Profile 2m Initial feed kit

A400-02-10- | N | WT |

Profile 2m Middle feed kit\*




A400-02-20- | N | WT |

\* Unidirectional Middle Feed.

#### MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N | WT |

Cable Length = 85mm.



#### MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m

A400-00-01- | N |

n = Total Length of System.

#### MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02- | N | WT |

#### MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N | WT |






Max distance between suspension kits = 100 cm.

#### MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N | WT |

Two End Caps Included.

24 V | Max. 4A



#### MINIMAL TRACK 24V Suspension Power Supply Box

ON/OFF

A400-00-06- | NT | WT |

P

V

D (A x B x C)

40W

24V

280 x 30 x 36mm

220 V~

Included ON/OFF 24Vdc Power Supply.

#### MINIMAL TRACK 24V Remote Power Supply

ON/OFF

0434-01-37

60W

24V

180 x 52 x 30mm

220 V~

0433-10-22

100W

24V

295 x 43 x 30mm

#### MINIMAL TRACK 24V Remote Constant Voltage Dimmer



0433-01-32

DALI / Push

24V

181 x 42 x 20mm

0433-01-33

CASAMBI

24V

172 x 42 x 20mm

0434-01-64

WIFI



24V

105 x 44 x 23mm

24 V

#### DROP VOLTAGE TABLE

| POWER (W) | CABLE SECTION (mm <sup>2</sup> ) | CABLE LENGTH (m) |     |     |     |
|-----------|----------------------------------|------------------|-----|-----|-----|
|           |                                  | <5               | <10 | <20 | <30 |
| 40        | 0,75                             | 30               | 30  | 30  | 30  |
|           | 1,5                              | 30               | 30  | 30  | 30  |
| 60        | 0,75                             | 30               | 30  | 20  | 10  |
|           | 1,5                              | 30               | 30  | 30  | 20  |
| 100       | 0,75                             | 20               | 10  | X   | X   |
|           | 1,5                              | 20               | 20  | 10  | X   |

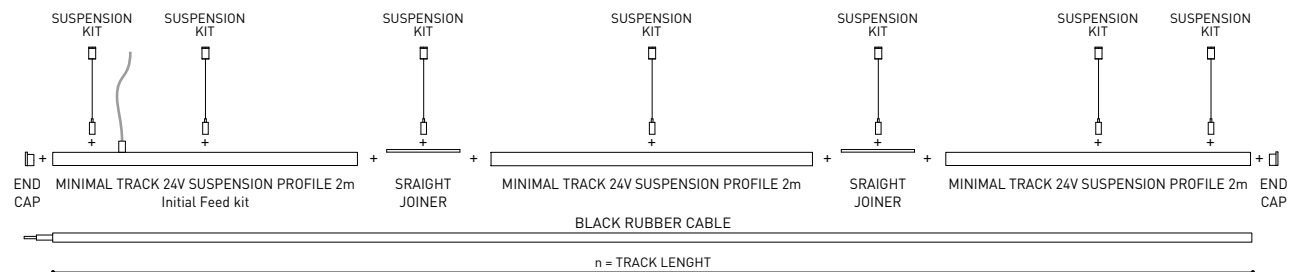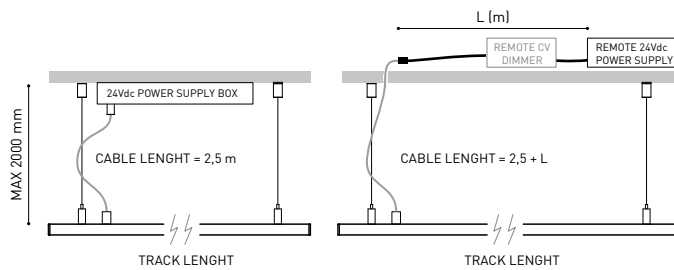

COLOUR | N ■ | NT ■ | WT □ |

RAL ⓘ » 538

DIM OPTIONS PLEASE CONSULT



>> MORE INFO

|                     |                      | P  | CCT   | I     | Flux    | LOR |
|---------------------|----------------------|----|-------|-------|---------|-----|
| LINE Micro 250 24V  | A395-00-00-   N   WT | 2W | 2700K | 400mA | 330 lm  | 70% |
|                     | A395-00-01-   N   WT | 2W | 3000K | 400mA | 340 lm  | 70% |
| LINE Micro 500 24V  | A395-10-00-   N   WT | 5W | 2700K | 400mA | 820 lm  | 70% |
|                     | A395-10-01-   N   WT | 5W | 3000K | 400mA | 840 lm  | 70% |
| LINE Micro 1000 24V | A395-20-00-   N   WT | 9W | 2700K | 700mA | 1430 lm | 70% |
|                     | A395-20-01-   N   WT | 9W | 3000K | 700mA | 1500 lm | 70% |

24 V |  IP20 | CRI>90 | L80B10 > 60.000 h


 MacAdam Step 2

 INCL


 MINIMAL TRACK

 113°


LINE MICRO 250 24V



LINE MICRO 500 24V



LINE MICRO 1000 24V



COLOUR | N ■ | WT □ | MATERIAL |  AL |  PC |

NOT VALID FOR MINIMAL TRACK 24V TRIMLESS » PLEASE CONSULT  
COLOURS MAY AFFECT THE LIGHTING PARAMETERS



48V SYSTEM

LINE 48V



>> MORE INFO


|               |                      | P     | CCT   | I     | Flux    | LOR |
|---------------|----------------------|-------|-------|-------|---------|-----|
| LINE 500 48V  | A376-10- 0-   N   WT | 10,5W | 2700K | 350mA | 1500 lm | 65% |
|               | A376-10- 1-   N   WT | 10,5W | 3000K | 350mA | 1600 lm | 65% |
|               | A376-10- 2-   N   WT | 10,5W | 4000K | 350mA | 1650 lm | 65% |
| LINE 1000 48V | A376-20- 0-   N   WT | 21W   | 2700K | 700mA | 3000 lm | 65% |
|               | A376-20- 1-   N   WT | 21W   | 3000K | 700mA | 3200 lm | 65% |
|               | A376-20- 2-   N   WT | 21W   | 4000K | 700mA | 3300 lm | 65% |
| LINE 2000 48V | A376-30- 0-   N   WT | 42W   | 2700K | 700mA | 6000 lm | 65% |
|               | A376-30- 1-   N   WT | 42W   | 3000K | 700mA | 6400 lm | 65% |
|               | A376-30- 2-   N   WT | 42W   | 4000K | 700mA | 6600 lm | 65% |

48 V | III IP20 | CRI>90 | L80B10 > 60.000 h



III \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

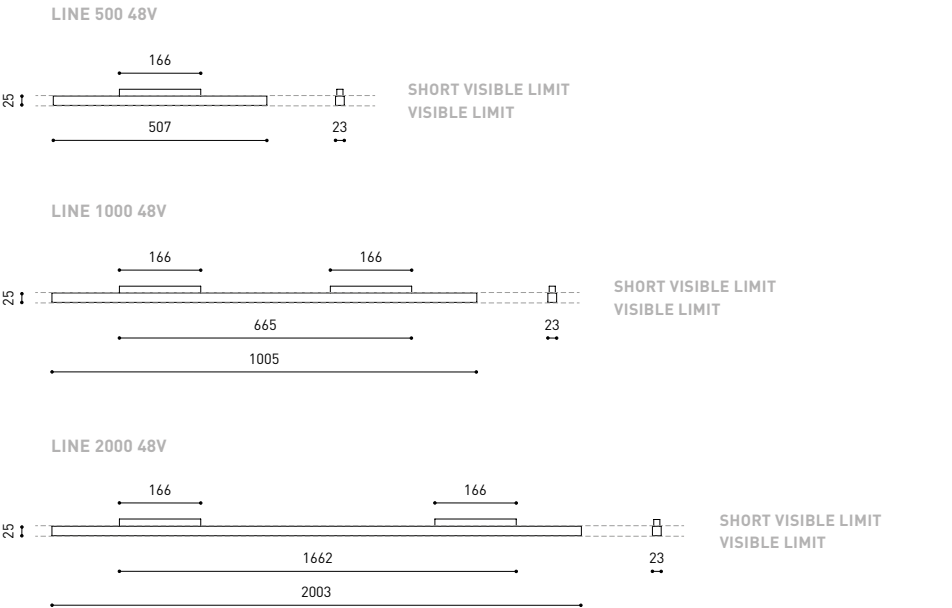

COLOUR | N ■ | WT □ | MATERIAL | AL | PC |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

» PLEASE CONSULT



# Accessories

# Driver options

FOR PRODUCTS WITH DRIVER EXCLUDED  
220-240 VAC INPUT

| DIM    | DRIVER | PIECES                          |                                   |                                   |           |
|--------|--------|---------------------------------|-----------------------------------|-----------------------------------|-----------|
|        |        | BLACK FOSTER<br>MICRO SURFACE 5 | BLACK FOSTER<br>MICRO SURFACE 2X2 | BLACK FOSTER<br>MICRO SURFACE 3X3 | REC MICRO |
| ON/OFF | D5     |                                 |                                   | 1                                 |           |
|        | D6     | 1...2                           | 1...3                             |                                   |           |
|        | D7     |                                 |                                   |                                   | 1...2     |
|        | D11    |                                 |                                   |                                   | 1...3     |
| DALI   | D23    |                                 |                                   | 1                                 |           |
|        | D24    | 1...3                           | 1...3                             |                                   |           |
|        | D25    |                                 |                                   |                                   | 1...2     |
|        | D28    |                                 |                                   |                                   | 1...3     |

## CONSTANT CURRENT LED DRIVERS

| DRIVER | TPOLOGY | DIM                 | REFERENCE | DESCRIPTION                           | I     |
|--------|---------|---------------------|-----------|---------------------------------------|-------|
| D5     | A       | ON/OFF              | 04340153  | DRIVER PROFESSIONALE 42W CONFIG.400mA | 400mA |
| D6     | A       |                     | 04340042  | DRIVER PROFESSIONALE 42W CONFIG.500mA | 500mA |
| D7     | B       |                     | 04340040  | DRIVER PROFESSIONALE 42W CONFIG.700mA | 700mA |
| D11    | B       |                     | 04340143  | DRIVER MP50 K3 CONFIG.700mA           | 700mA |
| D23    | D       | DALI                | 04340154  | DRIVER MAX.32W DIM DALI CONFIG 400mA  | 400mA |
| D24    | D       |                     | 04340044  | DRIVER MAX.32W DIM DALI CONFIG 500mA  | 500mA |
| D25    | E       |                     | 04340046  | DRIVER MAX.32W DIM DALI CONFIG 700mA  | 700mA |
| D28    | E       | DALI + PUSH + 1-10V | 04340125  | DRIVER MAXI JOLLY CONFIG 700mA        | 700mA |


## DRIVER MAXIMUM DISTANCE RANGE

| DRIVER TYPOLOGY      |  | A                  |                  |                    |                    | B                  |                  |                    |                    | C                  |                  |                    |                    |
|----------------------|--|--------------------|------------------|--------------------|--------------------|--------------------|------------------|--------------------|--------------------|--------------------|------------------|--------------------|--------------------|
| WIRE CROSS - SECTION |  | 0,5mm <sup>2</sup> | 1mm <sup>2</sup> | 1,5mm <sup>2</sup> | 2,5mm <sup>2</sup> | 0,5mm <sup>2</sup> | 1mm <sup>2</sup> | 1,5mm <sup>2</sup> | 2,5mm <sup>2</sup> | 0,5mm <sup>2</sup> | 1mm <sup>2</sup> | 1,5mm <sup>2</sup> | 2,5mm <sup>2</sup> |
| DISTANCE TO LED      |  | 20m                | 50m              | 50m                | 50m                | 10m                | 20m              | 20m                | 50m                |                    | 10m              | 20m                | 30m                |

| D                  |                  |                    |                    | E                  |                  |                    |                    | F                  |                  |                    |                    | G                  |                  |                    |                    |
|--------------------|------------------|--------------------|--------------------|--------------------|------------------|--------------------|--------------------|--------------------|------------------|--------------------|--------------------|--------------------|------------------|--------------------|--------------------|
| 0,5mm <sup>2</sup> | 1mm <sup>2</sup> | 1,5mm <sup>2</sup> | 2,5mm <sup>2</sup> | 0,5mm <sup>2</sup> | 1mm <sup>2</sup> | 1,5mm <sup>2</sup> | 2,5mm <sup>2</sup> | 0,5mm <sup>2</sup> | 1mm <sup>2</sup> | 1,5mm <sup>2</sup> | 2,5mm <sup>2</sup> | 0,5mm <sup>2</sup> | 1mm <sup>2</sup> | 1,5mm <sup>2</sup> | 2,5mm <sup>2</sup> |
| 15m                | 15m              | 15m                | 15m                | 10m                | 15m              | 15m                | 15m                |                    | 10m              | 10m                | 15m                | 2m                 | 2m               | 2m                 | 2m                 |

## CONSTANT CURRENT LED DRIVER


|        |                                                                                     |                                                                                                         |            | P (MAX) | I     | D               |
|--------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------|---------|-------|-----------------|
| ON/OFF |  |                                                                                                         | 0434-01-53 | 18W     | 400mA |                 |
|        |                                                                                     |                                                                                                         | 0434-00-42 | 22W     | 500mA | 129 x 42 x 30mm |
|        |                                                                                     |                                                                                                         | 0434-00-40 | 31W     | 700mA |                 |
|        |  |                                                                                                         | 0434-01-43 | 50W     | 700mA | 124 x 79 x 22mm |
| DIM    |  |  DALI                | 0434-01-54 | 19W     | 400mA |                 |
|        |                                                                                     |                                                                                                         | 0434-00-44 | 24W     | 500mA | 103 x 67 x 21mm |
|        |                                                                                     |                                                                                                         | 0434-00-46 | 32W     | 700mA |                 |
|        |  |  DALI   PUSH / 1-10V | 0434-01-25 | 50W     | 700mA | 124 x 79 x 22mm |

# Installation Schemes

PUSH: OPTION 1




1-10V




PHASE CUT



PUSH: OPTION 2






DALI




## Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

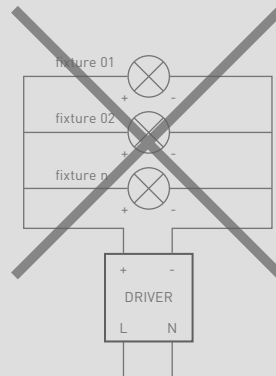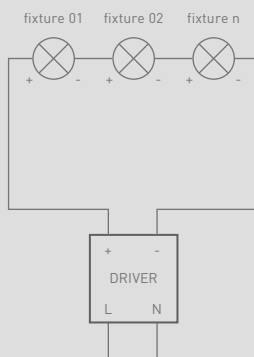

## Trimless Mounting

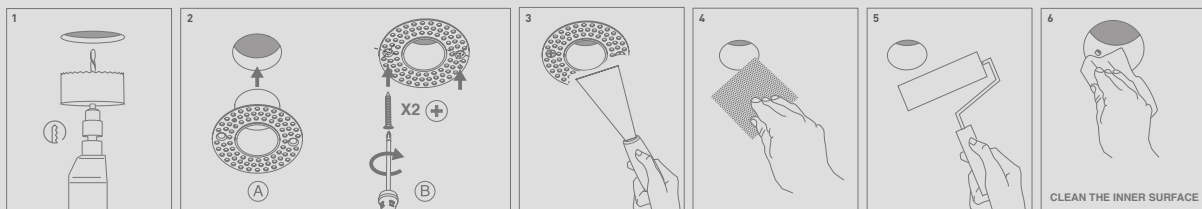

# Symbols

## GLOSSARY

| L                                                                                   | Longitud (en mm).                                                                                                      | Length (in mm).                                                                                             | Longueur (en mm).                                                                                                     | Lunghezza (in mm).                                                                                                           | Länge (in mm).                                                                             |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| AL                                                                                  | Aluminio                                                                                                               | Aluminium                                                                                                   | Aluminium                                                                                                             | Alluminio                                                                                                                    | Aluminium                                                                                  |
| PC                                                                                  | Polycarbonato                                                                                                          | Polycarbonate                                                                                               | Polycabonate                                                                                                          | Policarbonato                                                                                                                | Polycarbonat                                                                               |
| PE                                                                                  | Polietileno                                                                                                            | Polyethylene                                                                                                | Polyéthylène                                                                                                          | Poietilene                                                                                                                   | Polyäthylen                                                                                |
| GL                                                                                  | Cristal                                                                                                                | Glass                                                                                                       | Verre                                                                                                                 | Vetro                                                                                                                        | Glas                                                                                       |
| PMMA                                                                                | Polimetilmetacrilato                                                                                                   | Polymethyl methacrylate                                                                                     | Polyméthacrylate de méthyle                                                                                           | Polimetilmetacrilato                                                                                                         | Polymethylmetacrylat                                                                       |
| INOX                                                                                | Acero inoxidable                                                                                                       | Stainless steel                                                                                             | Acier inoxydable                                                                                                      | Acciaio inossidabile                                                                                                         | Edelstahl                                                                                  |
| MATT                                                                                | Mate                                                                                                                   | Matt                                                                                                        | Opaque                                                                                                                | Opaco                                                                                                                        | Matt                                                                                       |
| TRANS                                                                               | Transparente                                                                                                           | Transparent                                                                                                 | Transparent                                                                                                           | Trasparente                                                                                                                  | Transparent                                                                                |
| ABS                                                                                 | Acrilonitrilo Butadieno Estireno                                                                                       | Acrylonitrile Butadiene Styrene                                                                             | Acrylonitrile Butadiène Styrene                                                                                       | Acrlonitrile Butadiene Styrene                                                                                               | Acrylnitril-Butadien-Styrol                                                                |
| LOR                                                                                 | <i>Lumen Output Ratio.</i> Relación entre el flujo de salida de la luminaria y el flujo de salida de la fuente de luz. | Lumen Output Ratio. Ratio between the output flux of the luminaire and the output flux of the light source. | <i>Lumen Output Ratio.</i> Rapport entre le flux de sortie du luminaire et le flux de sortie de la source de lumière. | <i>Lumen Output Ratio.</i> Relazione tra il flusso di uscita dell'apparecchio e il flusso di uscita della sorgente luminosa. | Zusammenhang zwischen dem Ausgangsstrom der Leuchte und dem Ausgangsstrom der Lichtquelle. |
| IPXX                                                                                | Índice de estanqueidad                                                                                                 | Sealing rating                                                                                              | Indice d'étanchéité                                                                                                   | Indice di sigillatura                                                                                                        | Schutzgrad gegen Eindringen von Staub und Feuchtigkeit                                     |
| IKXX                                                                                | Índice de protección contra impactos                                                                                   | Impact resistance                                                                                           | Indice de protection contre des impacts                                                                               | Indicizzi di protezione contro impatti                                                                                       | Stoßfestigkeitsgrad                                                                        |
| MAX XX W                                                                            | Potencia máxima                                                                                                        | Maximum power                                                                                               | Puissance Maximum                                                                                                     | Potenza massima                                                                                                              | Maximale Leistung                                                                          |
| CCT                                                                                 | Temperatura de color                                                                                                   | Colour Temperature                                                                                          | Température de couleur                                                                                                | Temperatura di colore                                                                                                        | Farbtemperatur                                                                             |
|  | Fabricado en                                                                                                           | Made of                                                                                                     | Fabrique en                                                                                                           | Fabbricato in                                                                                                                | Hergestellt aus                                                                            |
|  | Reflector                                                                                                              | Screen                                                                                                      | Réflecteur                                                                                                            | Riflettore                                                                                                                   | Reflektor                                                                                  |
|  | Cristal óptico                                                                                                         | Optical glass                                                                                               | Verre optique                                                                                                         | Verro ottico                                                                                                                 | Optischem glas                                                                             |
|  | Difusor                                                                                                                | Diffuser                                                                                                    | Diffuseur                                                                                                             | Diffusore                                                                                                                    | Diffusor                                                                                   |
|  | Difusor                                                                                                                | Diffuser                                                                                                    | Diffuseur                                                                                                             | Diffusore                                                                                                                    | Diffusor                                                                                   |
|  | Lente refractora elíptica                                                                                              | Elliptical refractor                                                                                        | Réfracteur élliptique                                                                                                 | Rifrattore ellittico                                                                                                         | Linse (f. elliptischen Lichtkegel)                                                         |
|  | Filtro panel de abeja                                                                                                  | Honeycomb filter                                                                                            | Filtre nid d'abeilles                                                                                                 | Filtri favo                                                                                                                  | Waben-Raster                                                                               |
|  | Pantalla asimétrica                                                                                                    | Asymmetric screen                                                                                           | Accessoire asymetrique                                                                                                | Visiera asimetrica                                                                                                           | Assymetrischer Schirm/Blende                                                               |
|  | Difusor homogeneizador del haz de luz                                                                                  | Beam Mixer Diffuser                                                                                         | Diffuseur homogénéisateur de faisceau lumineux                                                                        | Diffusore di fascio luminoso misto                                                                                           | Strahlenmischdiffusor                                                                      |
|  | Bisel extra                                                                                                            | Add-on bezel                                                                                                | Collerette extra                                                                                                      | Cornice extra                                                                                                                | Zusatz-Zierring                                                                            |
|  | Certificado ENEC                                                                                                       | ENEC certified                                                                                              | Certifié ENEC                                                                                                         | Certificato ENEC                                                                                                             | ENEC-Zertifizierung                                                                        |
|  | Certificado IEC                                                                                                        | IEC certified                                                                                               | Certifié IEC                                                                                                          | Certificato IEC                                                                                                              | IEC-Zertifizierung                                                                         |
|  | Compatible con la normativa francesa RT2012 & BBC                                                                      | Compatible with the French Standard RT2012 & BBC                                                            | Compatible avec la Norme française RT2012 & BBC                                                                       | Compatibile con la normativa francese RT2012 & BBC                                                                           | Kompatibel mit der französischen Norm RT2012 & BBC                                         |



|                                                                                     |                                                |                                            |                                                      |                                                  |                                            |
|-------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------------------|------------------------------------------------------|--------------------------------------------------|--------------------------------------------|
|    | Clase I                                        | Class I                                    | Classe I                                             | Classe I                                         | Klasse I                                   |
|    | Clase II                                       | Class II                                   | Classe II                                            | Classe II                                        | Klasse II                                  |
|    | Clase III                                      | Class III                                  | Classe III                                           | Classe III                                       | Klasse III                                 |
| 12 V                                                                                | Tensión de alimentación 12V                    | Input supply voltage 12V                   | Tension d'alimentation de l'ampoule 12V              | Tensione di alimentazione della lampada 12V      | Anschlusssspannung 12V                     |
| 24 V                                                                                | Tensión de alimentación 24vdc                  | Power supply voltaje 24vdc                 | Tension d'alimentation de l'ampoule 24vdc            | Tensione di alimentazione della lampada 24vdc    | Netzspannung 24vdc                         |
| 48 V                                                                                | Tensión de alimentación 48vdc                  | Power supply voltaje 48vdc                 | Tension d'alimentation de l'ampoule 48vdc            | Tensione di alimentazione della lampada 48vdc    | Netzspannung 48vdc                         |
| 220<br>240 V~                                                                       | Tensión de alimentación 220-240V               | Power supply voltaje 220-240V              | Tension d'alimentation de l'ampoule 220-240V         | Tensione di alimentazione della lampada 220-240V | Netzspannung 220-240V                      |
|    | Equipo no incluido                             | Control gear not included                  | Équipement non inclus                                | Alimentatore non compreso                        | Vorschaltgerät exklusive                   |
|    | Equipo electrónico incluido                    | Electronic control gear included           | Équipement électronique inclus                       | Alimentatore elettronico compreso                | Vorschaltgerät elektronische inklusive     |
|    | Alojamiento en mm para empotrables             | Fitting hole for recessed luminaires in mm | Espace d'emplacement en mm pour encastrables         | Foro in mm ad incasso                            | Einbauloch in mm                           |
|    | Empotrable cuadrado para agujero redondo       | Squared fixture for round fitting holes    | Encastrable carré pour trou rond                     | Quadrato da incasso per foro rotondo             | Quadratische Leuchte mit rundem Einbauloch |
|    | Ángulo de basculación                          | Tilting angle                              | Angle de basculation                                 | Angolo di inclinazione                           | Drehwinkel - Kippwinkel                    |
|    | Doble basculación                              | Double tilting acción                      | Double basculation                                   | Doppia inclinazione                              | Doppelte Schwenkbarkeit                    |
|    | Ángulo de giro                                 | Rotation angle                             | Angle de rotation                                    | Angolo di rotazione                              | Drehwinkel                                 |
|    | Conexión rápida                                | Fast connection                            | Conexion rapide                                      | Collegamento rapido                              | Schnellsteckeranschluss                    |
|    | Bloque de conexión no incluido                 | Terminal strip not included                | Bande terminale connector exclus                     | Morsetto non compreso                            | Ohne Klemmenleiste                         |
|   | Conector USB-C                                 | USB-C connector                            | Port USB-C                                           | USB-C connect                                    | USB-C Verbindungskabel                     |
|  | Cargador universal                             | Universal charger                          | Chargeur universel                                   | Caricatore universale                            | Universal-Ladegerät                        |
|  | Conexión con enchufe                           | Plug-in                                    | Connexion avec prise                                 | Collegamento con spina                           | Anschluss mit Stecker                      |
|  | Tipo de carril                                 | Rail Type                                  | Type de rail                                         | Tipo de binario                                  | Schienenmodelle                            |
|  | Regulable                                      | Dimmable                                   | Gradable                                             | Dimmerabile                                      | Dimmbar                                    |
|  | Longitud del cable                             | Cable length                               | Longueur de câble                                    | Lunghezza di cavo                                | Hängekabel Schnelljustierungsvorrichtung   |
|  | Regulación rápida del cable de suspensión      | Quick adjustment for cable suspension      | Régulation rapide du câble de suspension             | Regolazione rapida del cavo di sospensione       | Schnelle Regulation del Hängekabels        |
|  | Control inalámbrico                            | Wireless control                           | Contrôle sans fil                                    | Wireless control                                 | Wireless control                           |
|  | Dispositivo para alumbrado de emergencias      | Emergency lighting device                  | Dispositif pour éclairage de secours                 | Dispositivo per illuminazione di emergenza       | Notbeleuchtung                             |
|  | Batería LI-ION                                 | LI-ION battery                             | Batterie au lithium-ion                              | Batteria agli ioni di litio                      | Lithium-Ionen-Akku                         |
|  | Tipo de instalación y dirección del haz de luz | Installation type and light beam direction | Type d'installation et direction du faisceau lumineu | Tipo d'impianto e direzione del fascio           | Art und Ausrichtung des Lichtkegels        |
|  | Confort visual. UGR (Unified Glare Rating)     | UGR (Unified Glare Rating) Visual comfort  | Confort visuel. UGR (Unified Glare Rating)           | Comfort visivo. UGR (Unified Glare Rating)       | Sehkomfort. UGR (Unified Glare Rating)     |
|  | Estabilidad cromática: Pasos MacAdam           | Chromatic stability: MacAdam Steps         | Stabilité chromatique: Pas MacAdam                   | Stabilità cromatica: Step MacAdam                | Farbstabilität: MacAdam Stufen             |
|  | Carga máxima soportada                         | Maximum supported load                     | Charge maximale supportée                            | Carico massimo supportato                        | Maximale Traglast                          |
|  | Temperatura máxima en sueficie                 | Maximum surface temperature                | Température Maximale sur une surface                 | Temperatura massima in superficie                | Maximale Temperatur an der Oberfläche      |
|  | Válido para exterior                           | Suitable for outdoor use                   | Agréé pour l'extérieur                               | Adatto per uso esterno                           | Geeignet für Ausseninstallation            |
|  | Para uso interior                              | Indoor luminaire                           | Pour usage en intérieur                              | Per uso interno                                  | Innenleuchte                               |



# Colours

The lighting values indicated for each ref.code correspond to the results obtained from the tests carried out on the first mentioned colour of the list.



B | White



WT | Textured White



W | Matt White



WN | White-Black



NT | Textured Black



N | Matt Black



NMG | Matt black - Metallized gold



WMG | Matt White - Metallized gold



G | Gold



BG | Brushed Gold



PR | Primer Coating Finishing

## BLACK FOSTER

N = RAL 9005  
NMG = RAL not available. Metallic finish  
NT = RAL 9005  
NTMG = RAL not available. Metallic finish  
W = Colour in the mass looks alike RAL 9016  
WN = Colour in the mass looks alike RAL 9016 & RAL 9005  
WT = RAL 9016  
WTMG = RAL 9005 not available. Metallic finish

## FIT

WT = RAL 9016  
NT = RAL 9005  
G = RAL not available. Paint of metallic nanoparticles

## LENS LIGHT

N = RAL 9005  
W = RAL 9016

## LINE

WT = RAL 9016  
NT = RAL 9005  
N = Anodised, bath colour, looks alike RAL 9005  
W = Anodised, bath colour, looks alike RAL 9016

## LOOP

BG = RAL not available. Electrolytic bath  
N = RAL 9005  
NT = RAL 9005

## MINIMAL TRACK

N = RAL 9005  
WT = RAL 9016

## REC

WT = RAL 9016  
NT = RAL 9005  
PR = Primer coating finish

## SHOT LIGHT

N = Colour in the mass looks alike RAL 9005  
NMG = RAL not available. Metallic finish  
W = Colour in the mass looks alike RAL 9016  
WMG = RAL not available. Metallic finish

## TRACK 48V

N = RAL 9005  
NT = RAL 9005  
WT = RAL 9016

## WIZ

WT = RAL 9016  
NT = RAL 9005  
N = Anodised, bath colour, looks alike RAL 9005  
W = Anodised, bath colour, looks alike RAL 9016

## YORU

WT = RAL 9016  
NT = RAL 9005



# Reference

## INDEX

|             |                |            |        |
|-------------|----------------|------------|--------|
| 0433-01-32  | 21, 22, 37, 39 | A376-20-XX | 41     |
| 0433-01-33  | 21, 22, 37, 39 | A376-30-XX | 41     |
| 0433-10-22  | 21, 22, 37, 39 | A384-00-0X | 37     |
| 0434-00-40  | 19, 44         | A384-02-00 | 37, 39 |
| 0434-00-42  | 15, 44         | A395-00-0X | 40     |
| 0434-00-44  | 15, 44         | A395-10-0X | 40     |
| 0434-00-46  | 19, 44         | A395-20-0X | 40     |
| 0434-01-25  | 19, 44         | A399-00-XX | 32     |
| 0434-01-31  | 25             | A400-00-XX | 39     |
| 0434-01-37  | 21, 22, 37, 39 | A400-02-XX | 39     |
| 0434-01-43  | 19, 44         | A452-00-0X | 4      |
| 0434-01-53  | 15, 44         | A453-3X-XX | 6      |
| 0434-01-54  | 15, 44         | A453-4X-XX | 6      |
| 0434-01-61  | 4, 24          | A453-5X-XX | 6      |
| 0434-01-62  | 4, 24          | A454-0X-XX | 7      |
| 0434-01-64  | 21, 22, 37, 39 | A457-00-XX | 19     |
| 0434-01-67  | 21             | A458-00-0X | 5      |
| A023-00-01  | 25             | A458-0X-00 | 4      |
| A023-00-02  | 25             | A459-20-0X | 15     |
| A023-00-03  | 38             | A459-30-0X | 15     |
| A023-00-05  | 25             | A459-40-0X | 15     |
| A219-21-06  | 5              | A461-00-0X | 19     |
| A219-21-10  | 5              | A462-0X-XX | 10     |
| A219-21-21  | 5              | A463-0X-XX | 11     |
| A219-22-06  | 5              | A465-0X-1X | 27     |
| A317-00-06  | 5              | A466-0X-XX | 24     |
| A319-1X-XX  | 8, 34          | A467-00-0X | 22     |
| A319-2X-XX  | 8, 34          | A467-02-00 | 22     |
| A319-3X-XX  | 8, 34          | A468-20-1X | 23     |
| A319-4X-XX  | 9, 35          | A469-0X-0X | 12     |
| A319-5X-XX  | 9, 35          | A470-0X-0X | 13     |
| A338-00-0X  | 5, 25          | A471-0X-XX | 30     |
| A338-00-1X  | 5, 25          | A472-0X-XX | 31     |
| A338-00-2X  | 25             | A473-10-XX | 17     |
| A338-00-30  | 25             | A473-20-XX | 17     |
| A356-00-00  | 30             | A474-10-XX | 17     |
| A357-00-00  | 31             | A474-20-XX | 17     |
| A376-10-X-0 | 41             | A475-X0-0X | 21     |
| A376-10-XX  | 41             | A478-00-0X | 29     |


## CEILING RECESSED




BLACK FOSTER MICRO




BLACK FOSTER




SHOT LIGHT



LENS LIGHT




SWAP



POINTER



LEX




ALASKA TRIMLESS



PUCK RECESSED



DUOMO



OLYMPIA




DEEP




DROP



STRAM



FOX




MIX




MADISON



QUAD




ESSENTIALS



POP UP



HIDDEN




TWIST



ORBITAL




WELLIT




HUBBLE




MAGNETIC PLUS MICRO



MAGNETIC FIT



MAGNETIC SIX XS




MAGNETIC IO MICRO




MAGNETIC TOP MICRO



SIX RECESSED




FIT RECESSED



PLUS RECESSED

## SURFACE



BLACK FOSTER MICRO SURFACE



BLACK FOSTER SURFACE



SHOT LIGHT M SURFACE



TOP




SCOPE SURFACE



PUCK



ORBITAL SURFACE



VOLA



SKY



STRAM SURFACE



DRUM



FIFTY+ SURFACE



FIT SURFACE




IO SURFACE




ZEN TUBE SURFACE

## SUSPENSION



ALASKA



ART



STICK



HOLLY



SPIN



SCOPE



VOLA SUSPENSION




SALT



BRIGIT




DRUM SUSPENSION



LOOP



LINE SUSPENSION



BLACK FOSTER SUSPENSION



SLIMGOT



FIFTY+ SUSPENSION

WALL, FLOOR  
& PORTABLE



UP



YORU



REC




LIP




FLAP



AURAE



DREAM



RHINO




WALLY




ALFA



YORU SPIKE



DARK



STEP


TRACK  
LIGHTS



MINIMAL TRACK



BLACK FOSTER MICRO 24V



ALASKA 24V



PLUS MICRO 24V



SIX XS 24V



TOP MICRO 24V



LINE MICRO 24V




IO MICRO 24V



FIT 24V



STICK 22 24V




TRACK 48V




SIX 48V



FIT 48V



PLUS 48V



IO 48V




ZEN TUBE 48V



WIZ 48V



TOP 48V



LINE 48V



BLACK FOSTER MICRO 48V




STICK 48V



HOLLY 48V



SPIN 48V



TRACK 1L




IO



PLUS MINI 1L




FIT 651L




TRACK 3L



SIX




FIT



PLUS



ZEN



ZEN TUBE



THOR


CUSTOM  
SYSTEMS



FANCY SHAPE



TOP FANCY SHAPE



ALASKA FANCY SHAPE



STICK FANCY SHAPE



SPIN FANCY SHAPE



HOLLY FANCY SHAPE

OTHER  
CUSTOM SYSTEMS



BLACK FOSTER CUSTOM




BRIGHT LINE




FIFTY+ CUSTOM

LARK &  
ACCESSORIES



LARK-111



LARK



TRIMLESS TOOL

## CREDITS

ART DIRECTION  
Arkoslight Team

GRAPHIC DESIGN  
Estudio David Cercós

EDITION  
April 2023  
Copyright © Arkoslight 2023  
All rights reserved



## ARKOSLIGHT

Calle N · Pol. Ind. EL OLIVERAL  
46394 Ribarroja del Turia  
Valencia · Spain  
Fax +34 961 667 054  
info@arkoslight.com  
www.arkoslight.com

Tel. +34 961 667 207  
 Tel. +44 2039 66 45 92  
 Tel. +33 182 885 200  
 Tel. +39 02 9475 0007  
 Tel. +49 221 7159 4740

## JOKERLIGHT

Arkoslight trades its products with  
UL certification through Jokerlight  
2750 NW 84th Ave  
Doral · FL 33122 (USA)  
info@jokerlight.com  
www.jokerlight.com







