



CO
CO

ARKOSLIGHT



Kompakt und Leistungsstark

LED der neuen Generation. **154lm/W**
Lichteffizienz. Ein kompakter Aluminiumzylinder
mit einem Lichtstrom von **1340 lm**.



Bewegungsfreiheit

360° Drehung und **90°** Neigung.



COCO



20°



34°



48°

COCO 48V TUNABLE WHITE



28°



42°



54°

Beleuchtungsfreiheit

Drei Öffnungswinkel **spot** / **medium** / **flood** + **Super spot Version 12°**.
Deckt verschiedene Bedürfnisse ab: Akzentbeleuchtung, allgemeine Beleuchtung...



Coco Super Spot

Hochtechnisch (**Beam 12°**). Sorgfältig ausgewählte LED und Linsen von hoher Qualität. Bietet einen gleichmäßigen Lichtstrom und angenehme Blendungsniveaus.

DIM on board Option

Perfekte Integration für 48V-Systeme.
Ermöglicht eine unabhängige Regelung der
Intensität jeder Leuchte von **0** bis **100**.



Zubehör


Verschiedene Zubehörteile erhältlich:
Anti-Glare-Honeycomb und **Anti-Glare-Screen**,
die die Blendung reduzieren und den
visuellen Komfort fördern.



COCO ANTI-GLARE SCREEN



COCO ANTI-GLARE
HONEYCOMB LOUVER

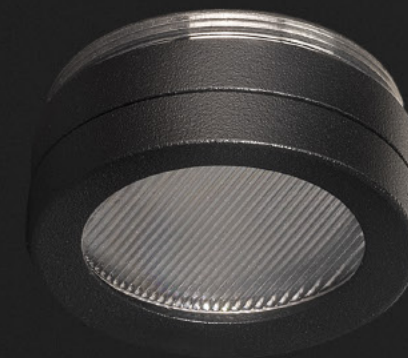





Linear Filter

Verwandelt den kreisförmigen Lichtstrahl in eine **lineare Form**. Ideal für Anwendungen, bei denen eine präzise und lineare Lichtverteilung benötigt wird.



MAGNETIC 24V COCO

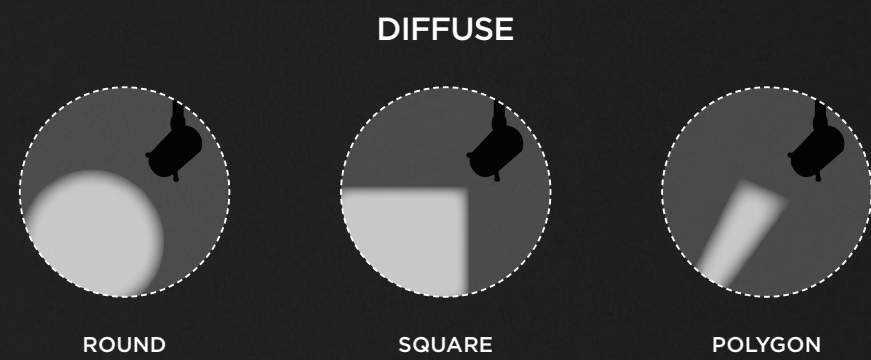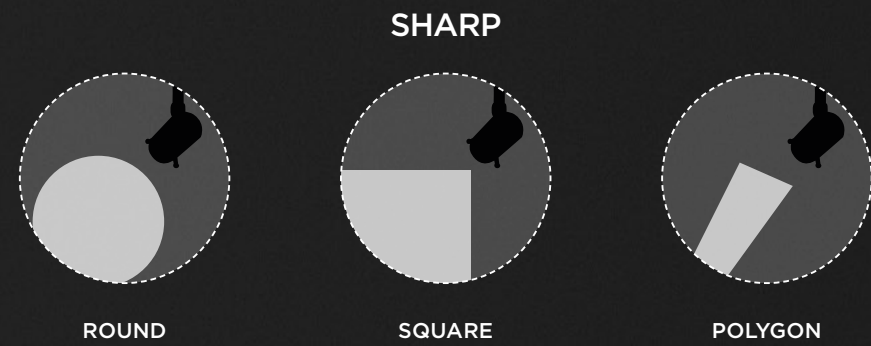

Coco Shaper

Einzigartige Szenografien, indem es die gewünschte geometrische Kontur projiziert: Kreise, quadratische oder dreieckige Polygone.



8:20h · 3700K



12:00h · 5000K



17:00h · 2700K

Tunable white


Verfügbar für Coco 48V. Sehr geschätzt in Wohn-, Gastgewerbe-, Büro-Umgebungen, etc.

COCO
TECHNISCHE
SPEZIFIKATIONEN






MAGNETIC 24V COCO



OPTIONAL ACCESSORIES


COCO Anti-glare Honeycomb Louver**

A498-90-00- | WT | NT |



COCO Anti-glare Screen**

A498-90-01- | WT | NT |



COCO Linear Filter**

A498-90-02- | WT | NT |



COCO High Chromatic Led**

NOT SOLD SEPARATELY

TRIMLESS TOOL D16 X D34mm

A478-00-00

		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO	A499-00-10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A499-00-11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A499-00-13- WT NT	8,7W	3500K	20°	500mA	1310 lm	87%
	A499-00-12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A499-00-20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A499-00-21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A499-00-23- WT NT	8,7W	3500K	34°	500mA	1310 lm	89%
	A499-00-22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A499-00-30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A499-00-31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A499-00-33- WT NT	8,7W	3500K	48°	500mA	1310 lm	86%
	A499-00-32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

24 V |  IP20 | CRI>90 |  L80B10 > 66.000h

 MacAdam Step 2  EXCL*  INCL  360°  90°  20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO Super Spot	A499-00-00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A499-00-01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A499-00-03- WT NT	6W	3500K	12°	500mA	830 lm	66%
	A499-00-02- WT NT	6W	4000K	12°	500mA	850 lm	66%



24 V |  IP20 | CRI>90 |  L80B10 > 95.000h

 MacAdam Step 2  EXCL*  INCL  360°  90°  12°

MAGNETIC 24V CONNECTOR A435-01-00 | W | N |


* MANDATORY FOR INSTALLATION

 IP20 |  Ø16

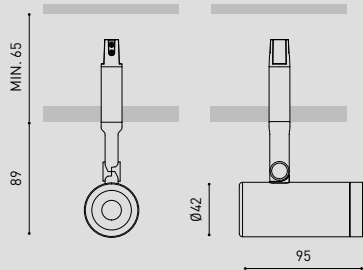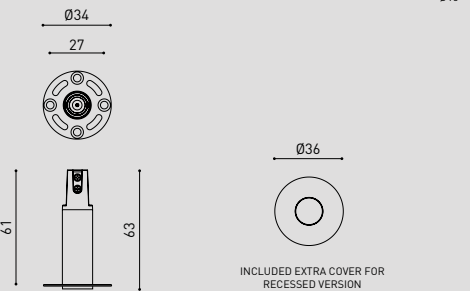


		P	V	D (A x B x C)
24V POWER SUPPLY	0434-01-37	60W	24V	180 x 52 x 30mm
	0433-10-22	100W	24V	295 x 43 x 30mm

220-240 V~ | MUST BE PLACED ON REMOTE



24V DIMMER	0433-01-32	DALI / Push	24V	181 x 42 x 20mm
	0433-01-33	CASAMBI	24V	172 x 42 x 20mm
	0434-01-64	WIFI	24V	105 x 44 x 23mm

24 V | MUST BE PLACED ON REMOTE
OTHER DIM OPTIONS PLEASE CONSULT



COLOUR | WT  | NT  | MATERIAL |  AL |  PC/PMMA | PLEASE CONSULT » 

OTHER CCT OPTIONS PLEASE CONSULT
** AFFECTS THE LIGHTING PARAMETERS



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY


COCO Anti-glare Honeycomb Louver
A498-90-00- | WT | NT |



COCO Anti-glare Screen
A498-90-01- | WT | NT |



COCO Linear Filter
A498-90-02- | WT | NT |



COCO High Chromatic Led

		P	CCT	Beam	I	Flux	LOR
COCO Recessed	A530-0- ☯ -10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A530-0- ☯ -11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A530-0- ☯ -13- WT NT	8,7W	3500K	20°	500mA	1310 lm	87%
	A530-0- ☯ -12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A530-0- ☯ -20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A530-0- ☯ -21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A530-0- ☯ -23- WT NT	8,7W	3500K	34°	500mA	1310 lm	89%
	A530-0- ☯ -22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A530-0- ☯ -30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A530-0- ☯ -31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A530-0- ☯ -33- WT NT	8,7W	3500K	48°	500mA	1310 lm	86%
	A530-0- ☯ -32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

220
240 V~

IP20

CRI>90

L80B10
>66.000 h

MacAdam
Step 2

OPTIONS*

INCL

Ø50

350°

90°

20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Super Spot	A530-0- ☯ -00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A530-0- ☯ -01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A530-0- ☯ -03- WT NT	6W	3500K	12°	500mA	830 lm	66%
	A530-0- ☯ -02- WT NT	6W	4000K	12°	500mA	850 lm	66%

220
240 V~

IP20

CRI>90

L80B10
>55.000 h

MacAdam
Step 2

OPTIONS*

INCL

Ø50

350°

90°

12°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Tunable White	A530-12-18- WT NT	8,5W	2700-5000K	28°	500mA	1010 lm	85%
	A530-12-28- WT NT	8,5W	2700-5000K	42°	500mA	1010 lm	87%
	A530-12-38- WT NT	8,5W	2700-5000K	54°	500mA	1010 lm	84%

220
240 V~

IP20

CRI>90

L80B10
>55.000 h

MacAdam
Step 3

DALI*

INCL


Ø50

350°

90°

28° / 42° / 54°

☯	*OPTIONS
2	DIM DALI
5	DIM PHASE CUT
7	DIM ON BOARD

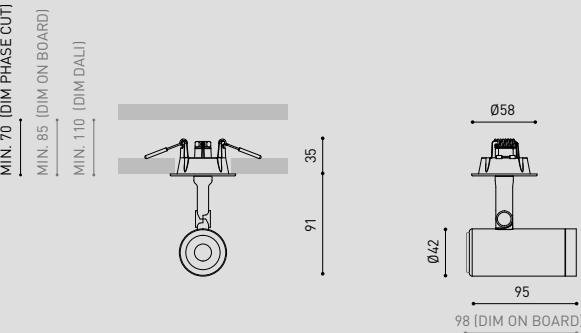



COCO SURFACE

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 34°

COCO High Chromatic Led

		P	CCT	Beam	I	Flux	LOR
COCO Surface	A536-0- Ⓞ -10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A536-0- Ⓞ -11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A536-0- Ⓞ -13- WT NT	8,7W	3500K	20°	500mA	1310 lm	87%
	A536-0- Ⓞ -12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A536-0- Ⓞ -20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A536-0- Ⓞ -21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A536-0- Ⓞ -23- WT NT	8,7W	3500K	34°	500mA	1310 lm	89%
	A536-0- Ⓞ -22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A536-0- Ⓞ -30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A536-0- Ⓞ -31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A536-0- Ⓞ -33- WT NT	8,7W	3500K	48°	500mA	1310 lm	86%
	A536-0- Ⓞ -32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

220
240

V~



IP20

|

CRI>90

|

L80B10

>66.000h

MacAdam

Step 2

|

OPTIONS*

|

REMOTE

|

350°

|

90°

|

20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
COCO Surface Super Spot	A536-0- Ⓞ -00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A536-0- Ⓞ -01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A536-0- Ⓞ -03- WT NT	6W	3500K	12°	500mA	830 lm	66%
	A536-0- Ⓞ -02- WT NT	6W	4000K	12°	500mA	850 lm	66%

220
240

V~



IP20

|

CRI>90

|

L80B10

>55.000h

MacAdam

Step 2

|

OPTIONS*

|

REMOTE

|

350°


|

90°

|

12°

Ⓞ	*OPTIONS
2	DIM DALI
5	DIM Phase Cut
7	DIM On Board

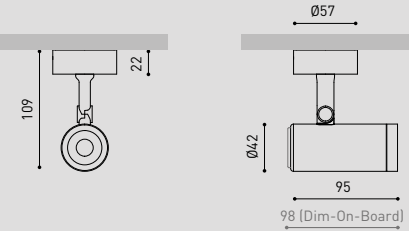

COLOUR | WT □ | NT ■ |

MATERIAL | AL | PC/PMMA |

PLEASE CONSULT »

OTHER CCT & DIM OPTIONS PLEASE CONSULT



COCO 48V

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |




COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



COCO High Chromatic Led

FINISHING	Lamp	Adaptor
WT	WT □ N ■	
NT	NT ■ N ■	
WTW	WT □ W □	
NTW	NT ■ W □	

COCO 48V	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓞ -10- WT NT WTW NTW -S		8,7W	2700K	20°	500mA	1200 lm	87%
A498-0- Ⓞ -11- WT NT WTW NTW -S		8,7W	3000K	20°	500mA	1250 lm	87%
A498-0- Ⓞ -13- WT NT WTW NTW -S		8,7W	3500K	20°	500mA	1310 lm	87%
A498-0- Ⓞ -12- WT NT WTW NTW -S		8,7W	4000K	20°	500mA	1340 lm	87%
A498-0- Ⓞ -20- WT NT WTW NTW -S		8,7W	2700K	34°	500mA	1200 lm	89%
A498-0- Ⓞ -21- WT NT WTW NTW -S		8,7W	3000K	34°	500mA	1250 lm	89%
A498-0- Ⓞ -23- WT NT WTW NTW -S		8,7W	3500K	34°	500mA	1310 lm	89%
A498-0- Ⓞ -22- WT NT WTW NTW -S		8,7W	4000K	34°	500mA	1340 lm	89%
A498-0- Ⓞ -30- WT NT WTW NTW -S		8,7W	2700K	48°	500mA	1200 lm	86%
A498-0- Ⓞ -31- WT NT WTW NTW -S		8,7W	3000K	48°	500mA	1250 lm	86%
A498-0- Ⓞ -33- WT NT WTW NTW -S		8,7W	3500K	48°	500mA	1310 lm	86%
A498-0- Ⓞ -32- WT NT WTW NTW -S		8,7W	4000K	48°	500mA	1340 lm	86%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >66.000 h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

20° / 34° / 48°

COCO 48V Super Spot	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓞ -00- WT NT WTW NTW -S		6W	2700K	12°	500mA	750 lm	66%
A498-0- Ⓞ -01- WT NT WTW NTW -S		6W	3000K	12°	500mA	800 lm	66%
A498-0- Ⓞ -03- WT NT WTW NTW -S		6W	3500K	12°	500mA	830 lm	66%
A498-0- Ⓞ -02- WT NT WTW NTW -S		6W	4000K	12°	500mA	850 lm	66%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >55.000 h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

12°

COCO 48V Tunable White	+RE	P	CCT	Beam	I	Flux	LOR
A498-12-18- WT NT WTW NTW -S		8,5W	2700-5000K	28°	500mA	1010 lm	85%
A498-12-28- WT NT WTW NTW -S		8,5W	2700-5000K	42°	500mA	1010 lm	87%
A498-12-38- WT NT WTW NTW -S		8,5W	2700-5000K	54°	500mA	1010 lm	84%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >55.000 h

MacAdam Step 3

DALI*

INCL

TRACK 48V


360°

90°

28° / 42° / 54°

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	A4980110WT
-S	Track 48V Short	A4980110WT-S

OTHER DIM OPTIONS PLEASE CONSULT

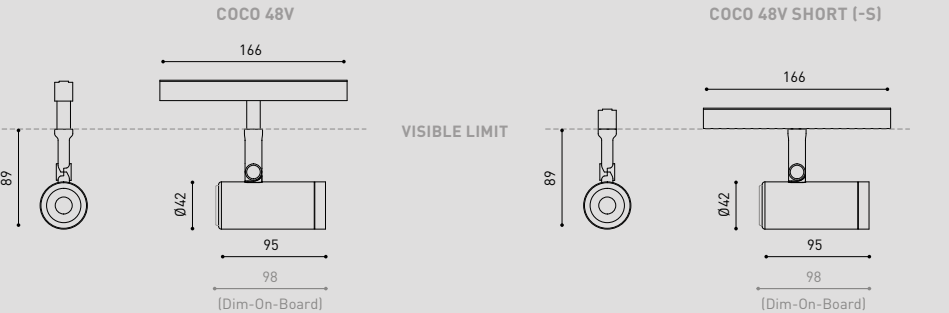

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC/PMMA | PLEASE CONSULT »

OTHER CCT PLEASE CONSULT
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

OPTIONAL ACCESSORIES



COCO



COCO SUPER SPOT



COCO ANTI-GLARE HONEYCOMB LOUVER



COCO LINEAR FILTER



COCO ANTI-GLARE SCREEN

FINISHINGS




NT



WT



NTW



WTW



NT



WT



NT SUPER SPOT



WT SUPER SPOT



NT



WT



NT SUPER SPOT



WT SUPER SPOT



COCO SHAPER RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Recessed	A519-1- ☯ -00- NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A519-1- ☯ -01- NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A519-1- ☯ -02- NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A519-1- ☯ -10- NT	6W	2700K	53°	500mA	650 lm	37%
	A519-1- ☯ -11- NT	6W	3000K	53°	500mA	680 lm	37%
	A519-1- ☯ -12- NT	6W	4000K	53°	500mA	730 lm	37%

220
240 V~ |  IP20 | CRI>90 | L80B10 >60.000 h



OPTIONS*



Ø50

360°


90°

20° - 33° / 53°

☯ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS
PLEASE CONSULT

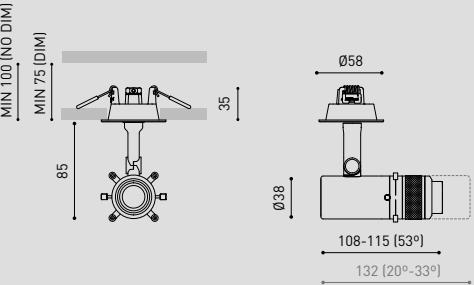

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT
CUSTOM GOBO PLEASE CONSULT



COCO SHAPER SURFACE

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Surface	A537-0- Ⓞ -00- NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A537-0- Ⓞ -01- NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A537-0- Ⓞ -02- NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A537-0- Ⓞ -10- NT	6W	2700K	53°	500mA	650 lm	37%
	A537-0- Ⓞ -11- NT	6W	3000K	53°	500mA	680 lm	37%
	A537-0- Ⓞ -12- NT	6W	4000K	53°	500mA	730 lm	37%

220
240 V~ |  IP20 | CRI>90 | L80B10
>60.000 h


MacAdam
Step 2

 OPTIONS*

 REMOTE

 350°


 90°

 20° - 33° / 53°

Ⓞ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS
PLEASE CONSULT

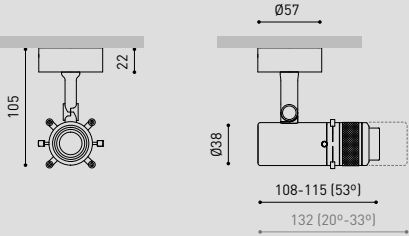

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT
CUSTOM GOBO PLEASE CONSULT

COCO SHAPER 48V




COCO SHAPER 48V							+RE	P	CCT	Beam	I	Flux	LOR	
A519-0-	⊘	-00-		NT		NTW		-S	6W	2700K	20°-33°	500mA	650 lm	40-38%
A519-0-	⊘	-01-		NT		NTW		-S	6W	3000K	20°-33°	500mA	680 lm	40-38%
A519-0-	⊘	-02-		NT		NTW		-S	6W	4000K	20°-33°	500mA	730 lm	40-38%
A519-0-	⊘	-10-		NT		NTW		-S	6W	2700K	53°	500mA	650 lm	37%
A519-0-	⊘	-11-		NT		NTW		-S	6W	3000K	53°	500mA	680 lm	37%
A519-0-	⊘	-12-		NT		NTW		-S	6W	4000K	53°	500mA	730 lm	37%

48 V |  IP20 | CRI>90 | L80B10 >60.000 h



⊘	*OPTIONS	+RE	REF. ENDING	EXAMPLE	FINISHING	Lamp	Adaptor
1	No DIM	Ø	Track 48V	A5190110NT	NT	NT 	N 
2	DIM DALI	-S	Track 48V Short	A5190110NT-S	NTW	NT 	W 

OTHER DIM OPTIONS
PLEASE CONSULT

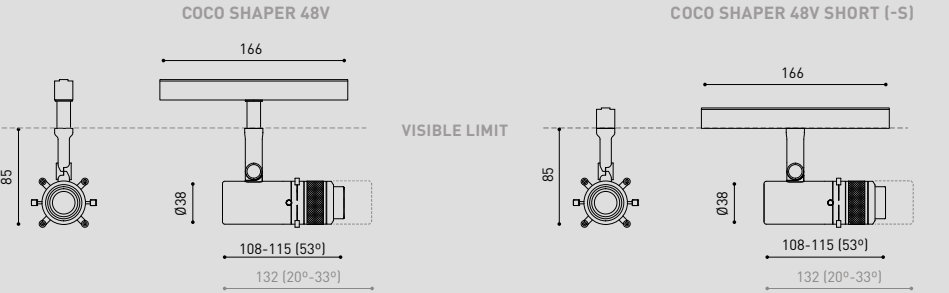

COLOUR | NT  | MATERIAL |  AL |  OPTICAL GLASS | PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).
CUSTOM GOBO PLEASE CONSULT

BEAM & FINISHINGS



53° | NT



20°- 33° | NT



53° | NT



20°- 33° | NT



53° | NTW



20°- 33° | NTW

CO
CO

by ARKOSLIGHT