



CO
CO

ARKOSLIGHT



Compact and powerful

New generation LED. **154 lm/W**
luminous efficacy. A compact aluminium
cylinder with a **flux of 1340 lm**.




Freedom of movement

360° rotation and **90°** tilt.



COCO

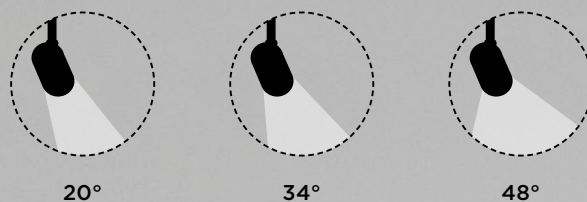

COCO 48V TUNABLE WHITE



Freedom of illumination

Three opening beams **spot** / **medium** / **flood** + **Super spot 12°** version.
Fulfills multiple needs: accent lighting, general lighting, ...



Coco Super Spot

Highly technical (**light beam aperture of 12°**).
Carefully selected high quality LEDs and lenses.
Keeps uniform flux and a pronounced visual comfort.

DIM on board option

Perfect integration for 48V systems. Allows to modulate the light intensity from **0** to **100** for each luminaire independently.



Accessories

Available with different accessories:
anti-glare honeycomb and
anti-glare screen, which reduce
glare and promote visual comfort.



COCO ANTI-GLARE SCREEN



COCO ANTI-GLARE
HONEYCOMB LOUVER







Linear Filter

The linear filter transforms the circular light beam into a **linear shape**. Ideal for applications where precise, linear light distribution is required.



MAGNETIC 24V COCO

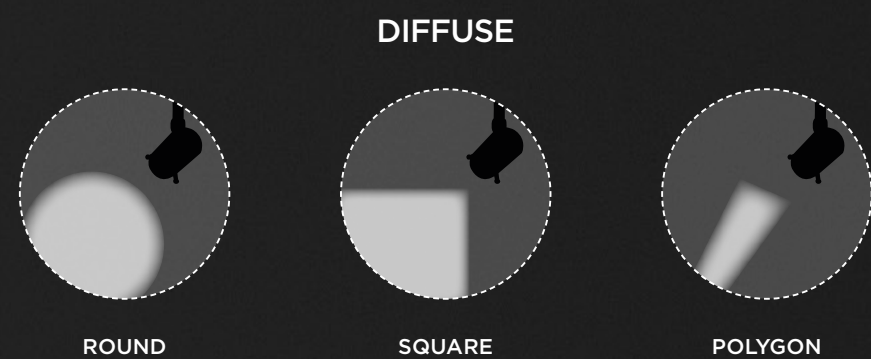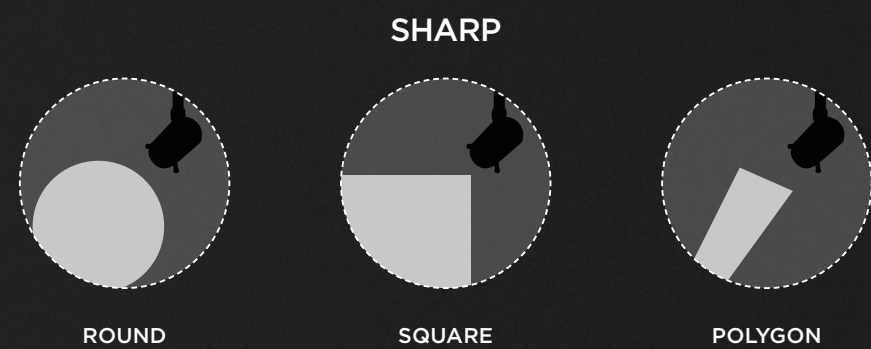

Coco Shaper

Creates unique scenographies by projecting the desired geometric outline: circles, quadrilateral or triangular polygons.



8:20h · 3700K



12:00h · 5000K



17:00h · 2700K

Tunable white


Available for Coco 48V. Highly appreciated in domestic environments, hospitality, office, etc.

COCO
TECHNICAL
SPECIFICATIONS





MAGNETIC 24V COCO



OPTIONAL ACCESSORIES

COCO Anti-glare Honeycomb Louver**

A498-90-00- | WT | NT |



COCO Anti-glare Screen**

A498-90-01- | WT | NT |



COCO Linear Filter**

A498-90-02- | WT | NT |



COCO High Chromatic Led**

NOT SOLD SEPARATELY

TRIMLESS TOOL D16 X D34mm

A478-00-00

		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO	A499-00-10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A499-00-11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A499-00-13- WT NT	8,7W	3500K	20°	500mA	1310 lm	87%
	A499-00-12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A499-00-20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A499-00-21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A499-00-23- WT NT	8,7W	3500K	34°	500mA	1310 lm	89%
	A499-00-22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A499-00-30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A499-00-31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A499-00-33- WT NT	8,7W	3500K	48°	500mA	1310 lm	86%
	A499-00-32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

24 V | IP20 | CRI>90 | L80B10 > 66.000h | MacAdam Step 2 | EXCL* | INCL | 360° | 90° | 20° / 34° / 48°



		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO Super Spot	A499-00-00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A499-00-01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A499-00-03- WT NT	6W	3500K	12°	500mA	830 lm	66%
	A499-00-02- WT NT	6W	4000K	12°	500mA	850 lm	66%

24 V | IP20 | CRI>90 | L80B10 > 95.000h | MacAdam Step 2 | EXCL* | INCL | 360° | 90° | 12°

MAGNETIC 24V CONNECTOR A435-01-00 | W | N |


* MANDATORY FOR INSTALLATION

IP20 | Ø16

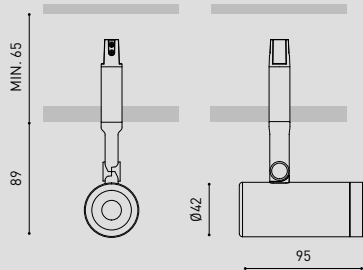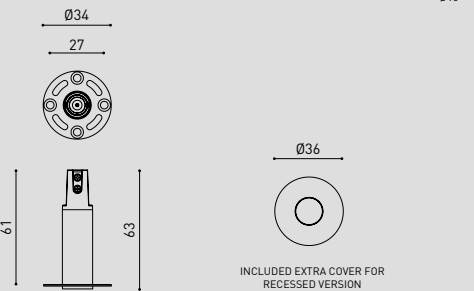


		P	V	D (A x B x C)
24V POWER SUPPLY	0434-01-37	60W	24V	180 x 52 x 30mm
	0433-10-22	100W	24V	295 x 43 x 30mm

220-240 V~ | MUST BE PLACED ON REMOTE



24V DIMMER	0433-01-32	DALI / Push	24V	181 x 42 x 20mm
	0433-01-33	CASAMBI	24V	172 x 42 x 20mm
	0434-01-64	WIFI	24V	105 x 44 x 23mm

24 V | MUST BE PLACED ON REMOTE
OTHER DIM OPTIONS PLEASE CONSULT



COLOUR | WT | NT | MATERIAL | AL | PC/PMMA | PLEASE CONSULT »

OTHER CCT OPTIONS PLEASE CONSULT
** AFFECTS THE LIGHTING PARAMETERS



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY


COCO Anti-glare Honeycomb Louver
A498-90-00- | WT | NT |



COCO Anti-glare Screen
A498-90-01- | WT | NT |



COCO Linear Filter
A498-90-02- | WT | NT |



COCO High Chromatic Led

		P	CCT	Beam	I	Flux	LOR
COCO Recessed	A530-0- Ⓞ -10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A530-0- Ⓞ -11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A530-0- Ⓞ -13- WT NT	8,7W	3500K	20°	500mA	1310 lm	87%
	A530-0- Ⓞ -12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A530-0- Ⓞ -20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A530-0- Ⓞ -21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A530-0- Ⓞ -23- WT NT	8,7W	3500K	34°	500mA	1310 lm	89%
	A530-0- Ⓞ -22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A530-0- Ⓞ -30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A530-0- Ⓞ -31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A530-0- Ⓞ -33- WT NT	8,7W	3500K	48°	500mA	1310 lm	86%
	A530-0- Ⓞ -32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

220
240 V~ | IP20 | CRI>90 | L80B10 >66.000 h

MacAdam Step 2

OPTIONS*

INCL

Ø50

350°

90°

20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Super Spot	A530-0- Ⓞ -00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A530-0- Ⓞ -01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A530-0- Ⓞ -03- WT NT	6W	3500K	12°	500mA	830 lm	66%
	A530-0- Ⓞ -02- WT NT	6W	4000K	12°	500mA	850 lm	66%

220
240 V~ | IP20 | CRI>90 | L80B10 >55.000 h

MacAdam Step 2

OPTIONS*

INCL

Ø50

350°

90°

12°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Tunable White	A530-12-18- WT NT	8,5W	2700-5000K	28°	500mA	1010 lm	85%
	A530-12-28- WT NT	8,5W	2700-5000K	42°	500mA	1010 lm	87%
	A530-12-38- WT NT	8,5W	2700-5000K	54°	500mA	1010 lm	84%

220
240 V~ | IP20 | CRI>90 | L80B10 >55.000 h

MacAdam Step 3

DALI*

INCL


Ø50

350°

90°

28° / 42° / 54°

Ⓞ	*OPTIONS
2	DIM DALI
5	DIM PHASE CUT
7	DIM ON BOARD

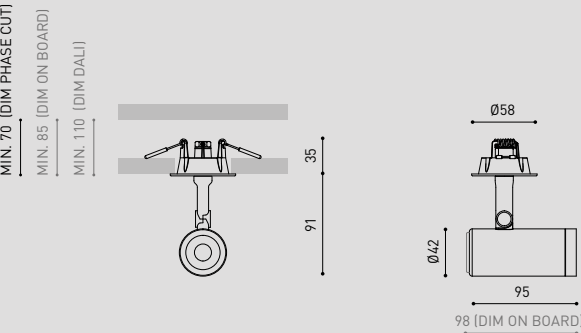

COCO RECESSED



COCO SURFACE

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 34°

COCO High Chromatic Led

		P	CCT	Beam	I	Flux	LOR
COCO Surface	A536-0- Ⓞ -10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A536-0- Ⓞ -11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A536-0- Ⓞ -13- WT NT	8,7W	3500K	20°	500mA	1310 lm	87%
	A536-0- Ⓞ -12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A536-0- Ⓞ -20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A536-0- Ⓞ -21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A536-0- Ⓞ -23- WT NT	8,7W	3500K	34°	500mA	1310 lm	89%
	A536-0- Ⓞ -22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A536-0- Ⓞ -30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A536-0- Ⓞ -31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A536-0- Ⓞ -33- WT NT	8,7W	3500K	48°	500mA	1310 lm	86%
	A536-0- Ⓞ -32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

220
240



IP20

CRI>90

L80B10
>66.000h



OPTIONS*

REMOTE

350°

90°

20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
COCO Surface Super Spot	A536-0- Ⓞ -00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A536-0- Ⓞ -01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A536-0- Ⓞ -03- WT NT	6W	3500K	12°	500mA	830 lm	66%
	A536-0- Ⓞ -02- WT NT	6W	4000K	12°	500mA	850 lm	66%

220
240



IP20

CRI>90

L80B10
>55.000h



OPTIONS*


REMOTE

350°

90°

12°

Ⓞ	*OPTIONS
2	DIM DALI
5	DIM Phase Cut
7	DIM On Board

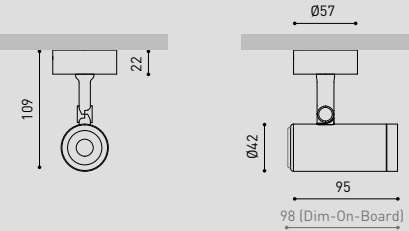

COLOUR | WT □ | NT ■ |

MATERIAL | AL | PC/PMMA |

PLEASE CONSULT »

OTHER CCT & DIM OPTIONS PLEASE CONSULT



COCO 48V

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |




COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



COCO High Chromatic Led

FINISHING	Lamp	Adaptor
WT	WT □ N ■	
NT	NT ■ N ■	
WTW	WT □ W □	
NTW	NT ■ W □	

COCO 48V	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓞ -10- WT NT WTW NTW -S		8,7W	2700K	20°	500mA	1200 lm	87%
A498-0- Ⓞ -11- WT NT WTW NTW -S		8,7W	3000K	20°	500mA	1250 lm	87%
A498-0- Ⓞ -13- WT NT WTW NTW -S		8,7W	3500K	20°	500mA	1310 lm	87%
A498-0- Ⓞ -12- WT NT WTW NTW -S		8,7W	4000K	20°	500mA	1340 lm	87%
A498-0- Ⓞ -20- WT NT WTW NTW -S		8,7W	2700K	34°	500mA	1200 lm	89%
A498-0- Ⓞ -21- WT NT WTW NTW -S		8,7W	3000K	34°	500mA	1250 lm	89%
A498-0- Ⓞ -23- WT NT WTW NTW -S		8,7W	3500K	34°	500mA	1310 lm	89%
A498-0- Ⓞ -22- WT NT WTW NTW -S		8,7W	4000K	34°	500mA	1340 lm	89%
A498-0- Ⓞ -30- WT NT WTW NTW -S		8,7W	2700K	48°	500mA	1200 lm	86%
A498-0- Ⓞ -31- WT NT WTW NTW -S		8,7W	3000K	48°	500mA	1250 lm	86%
A498-0- Ⓞ -33- WT NT WTW NTW -S		8,7W	3500K	48°	500mA	1310 lm	86%
A498-0- Ⓞ -32- WT NT WTW NTW -S		8,7W	4000K	48°	500mA	1340 lm	86%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >66.000 h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

20° / 34° / 48°

COCO 48V Super Spot	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓞ -00- WT NT WTW NTW -S		6W	2700K	12°	500mA	750 lm	66%
A498-0- Ⓞ -01- WT NT WTW NTW -S		6W	3000K	12°	500mA	800 lm	66%
A498-0- Ⓞ -03- WT NT WTW NTW -S		6W	3500K	12°	500mA	830 lm	66%
A498-0- Ⓞ -02- WT NT WTW NTW -S		6W	4000K	12°	500mA	850 lm	66%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >55.000 h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

12°

COCO 48V Tunable White	+RE	P	CCT	Beam	I	Flux	LOR
A498-12-18- WT NT WTW NTW -S		8,5W	2700-5000K	28°	500mA	1010 lm	85%
A498-12-28- WT NT WTW NTW -S		8,5W	2700-5000K	42°	500mA	1010 lm	87%
A498-12-38- WT NT WTW NTW -S		8,5W	2700-5000K	54°	500mA	1010 lm	84%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >55.000 h

MacAdam Step 3

DALI*

INCL

TRACK 48V


360°

90°

28° / 42° / 54°

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	A4980110WT
-S	Track 48V Short	A4980110WT-S

OTHER DIM OPTIONS PLEASE CONSULT

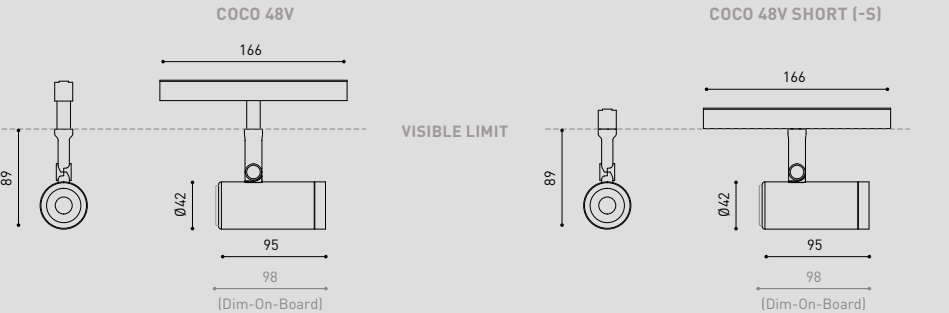

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC/PMMA | PLEASE CONSULT »

OTHER CCT PLEASE CONSULT
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

OPTIONAL ACCESSORIES



COCO



COCO SUPER SPOT



COCO ANTI-GLARE HONEYCOMB LOUVER



COCO LINEAR FILTER



COCO ANTI-GLARE SCREEN

FINISHINGS




NT



WT



NTW



WTW



NT



WT



NT SUPER SPOT



WT SUPER SPOT



NT



WT



NT SUPER SPOT



WT SUPER SPOT



COCO SHAPER
RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Recessed	A519-1- Ⓢ -00- NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A519-1- Ⓢ -01- NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A519-1- Ⓢ -02- NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A519-1- Ⓢ -10- NT	6W	2700K	53°	500mA	650 lm	37%
	A519-1- Ⓢ -11- NT	6W	3000K	53°	500mA	680 lm	37%
	A519-1- Ⓢ -12- NT	6W	4000K	53°	500mA	730 lm	37%


220
240 V~ |  IP20 | CRI>90 | L80B10
>60.000 h



Ⓢ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS
PLEASE CONSULT

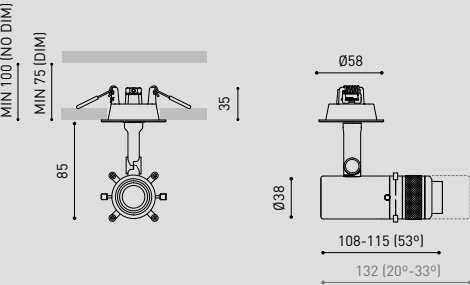

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT
CUSTOM GOBO PLEASE CONSULT



COCO SHAPER SURFACE

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Surface	A537-0- Ⓢ -00- NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A537-0- Ⓢ -01- NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A537-0- Ⓢ -02- NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A537-0- Ⓢ -10- NT	6W	2700K	53°	500mA	650 lm	37%
	A537-0- Ⓢ -11- NT	6W	3000K	53°	500mA	680 lm	37%
	A537-0- Ⓢ -12- NT	6W	4000K	53°	500mA	730 lm	37%

220
240 V~ |  IP20 | CRI>90 | L80B10
>60.000 h



OPTIONS*

REMOTE

350°


90°

20° - 33° / 53°

Ⓢ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS
PLEASE CONSULT

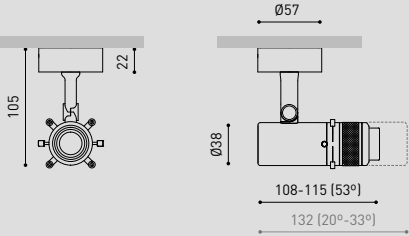

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

OTHER CCT PLEASE CONSULT
CUSTOM GOBO PLEASE CONSULT

PLEASE CONSULT » 

COCO SHAPER 48V



COCO SHAPER 48V							+RE	P	CCT	Beam	I	Flux	LOR	
A519-0-	⊙	-00-		NT		NTW		-S	6W	2700K	20°-33°	500mA	650 lm	40-38%
A519-0-	⊙	-01-		NT		NTW		-S	6W	3000K	20°-33°	500mA	680 lm	40-38%
A519-0-	⊙	-02-		NT		NTW		-S	6W	4000K	20°-33°	500mA	730 lm	40-38%
A519-0-	⊙	-10-		NT		NTW		-S	6W	2700K	53°	500mA	650 lm	37%
A519-0-	⊙	-11-		NT		NTW		-S	6W	3000K	53°	500mA	680 lm	37%
A519-0-	⊙	-12-		NT		NTW		-S	6W	4000K	53°	500mA	730 lm	37%

48 V | IP20 | CRI>90 | L80B10 >60.000 h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V


360°

90°

20° - 33° / 53°

⊙	*OPTIONS	+RE	REF. ENDING	EXAMPLE	FINISHING	Lamp	Adaptor
1	No DIM	Ø	Track 48V	A5190110NT	NT	NT	N
2	DIM DALI	-S	Track 48V Short	A5190110NT-S	NTW	NT	W

OTHER DIM OPTIONS
PLEASE CONSULT

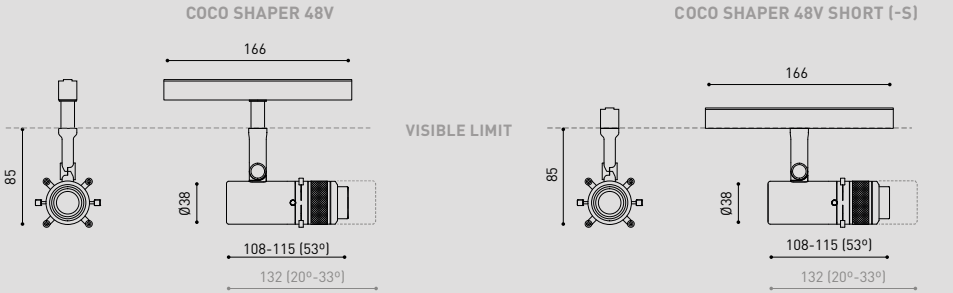

COLOUR | NT | MATERIAL | AL | OPTICAL GLASS | PLEASE CONSULT »

OTHER CCT PLEASE CONSULT
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).
CUSTOM GOBO PLEASE CONSULT

BEAM & FINISHINGS



53° | NT



20°- 33° | NT



53° | NT



20°- 33° | NT



53° | NTW



20°- 33° | NTW

CO
CO

by ARKOSLIGHT