THE LIGHTING COLLEC_ TION

JOKERLIGHT®


LIGHT&LIFE

SINCE 1984

JOKERLIGHT®

THE HOME OF LIGHT

JOKERLIGHT HEADQUARTERS
VALENCIA · SPAIN

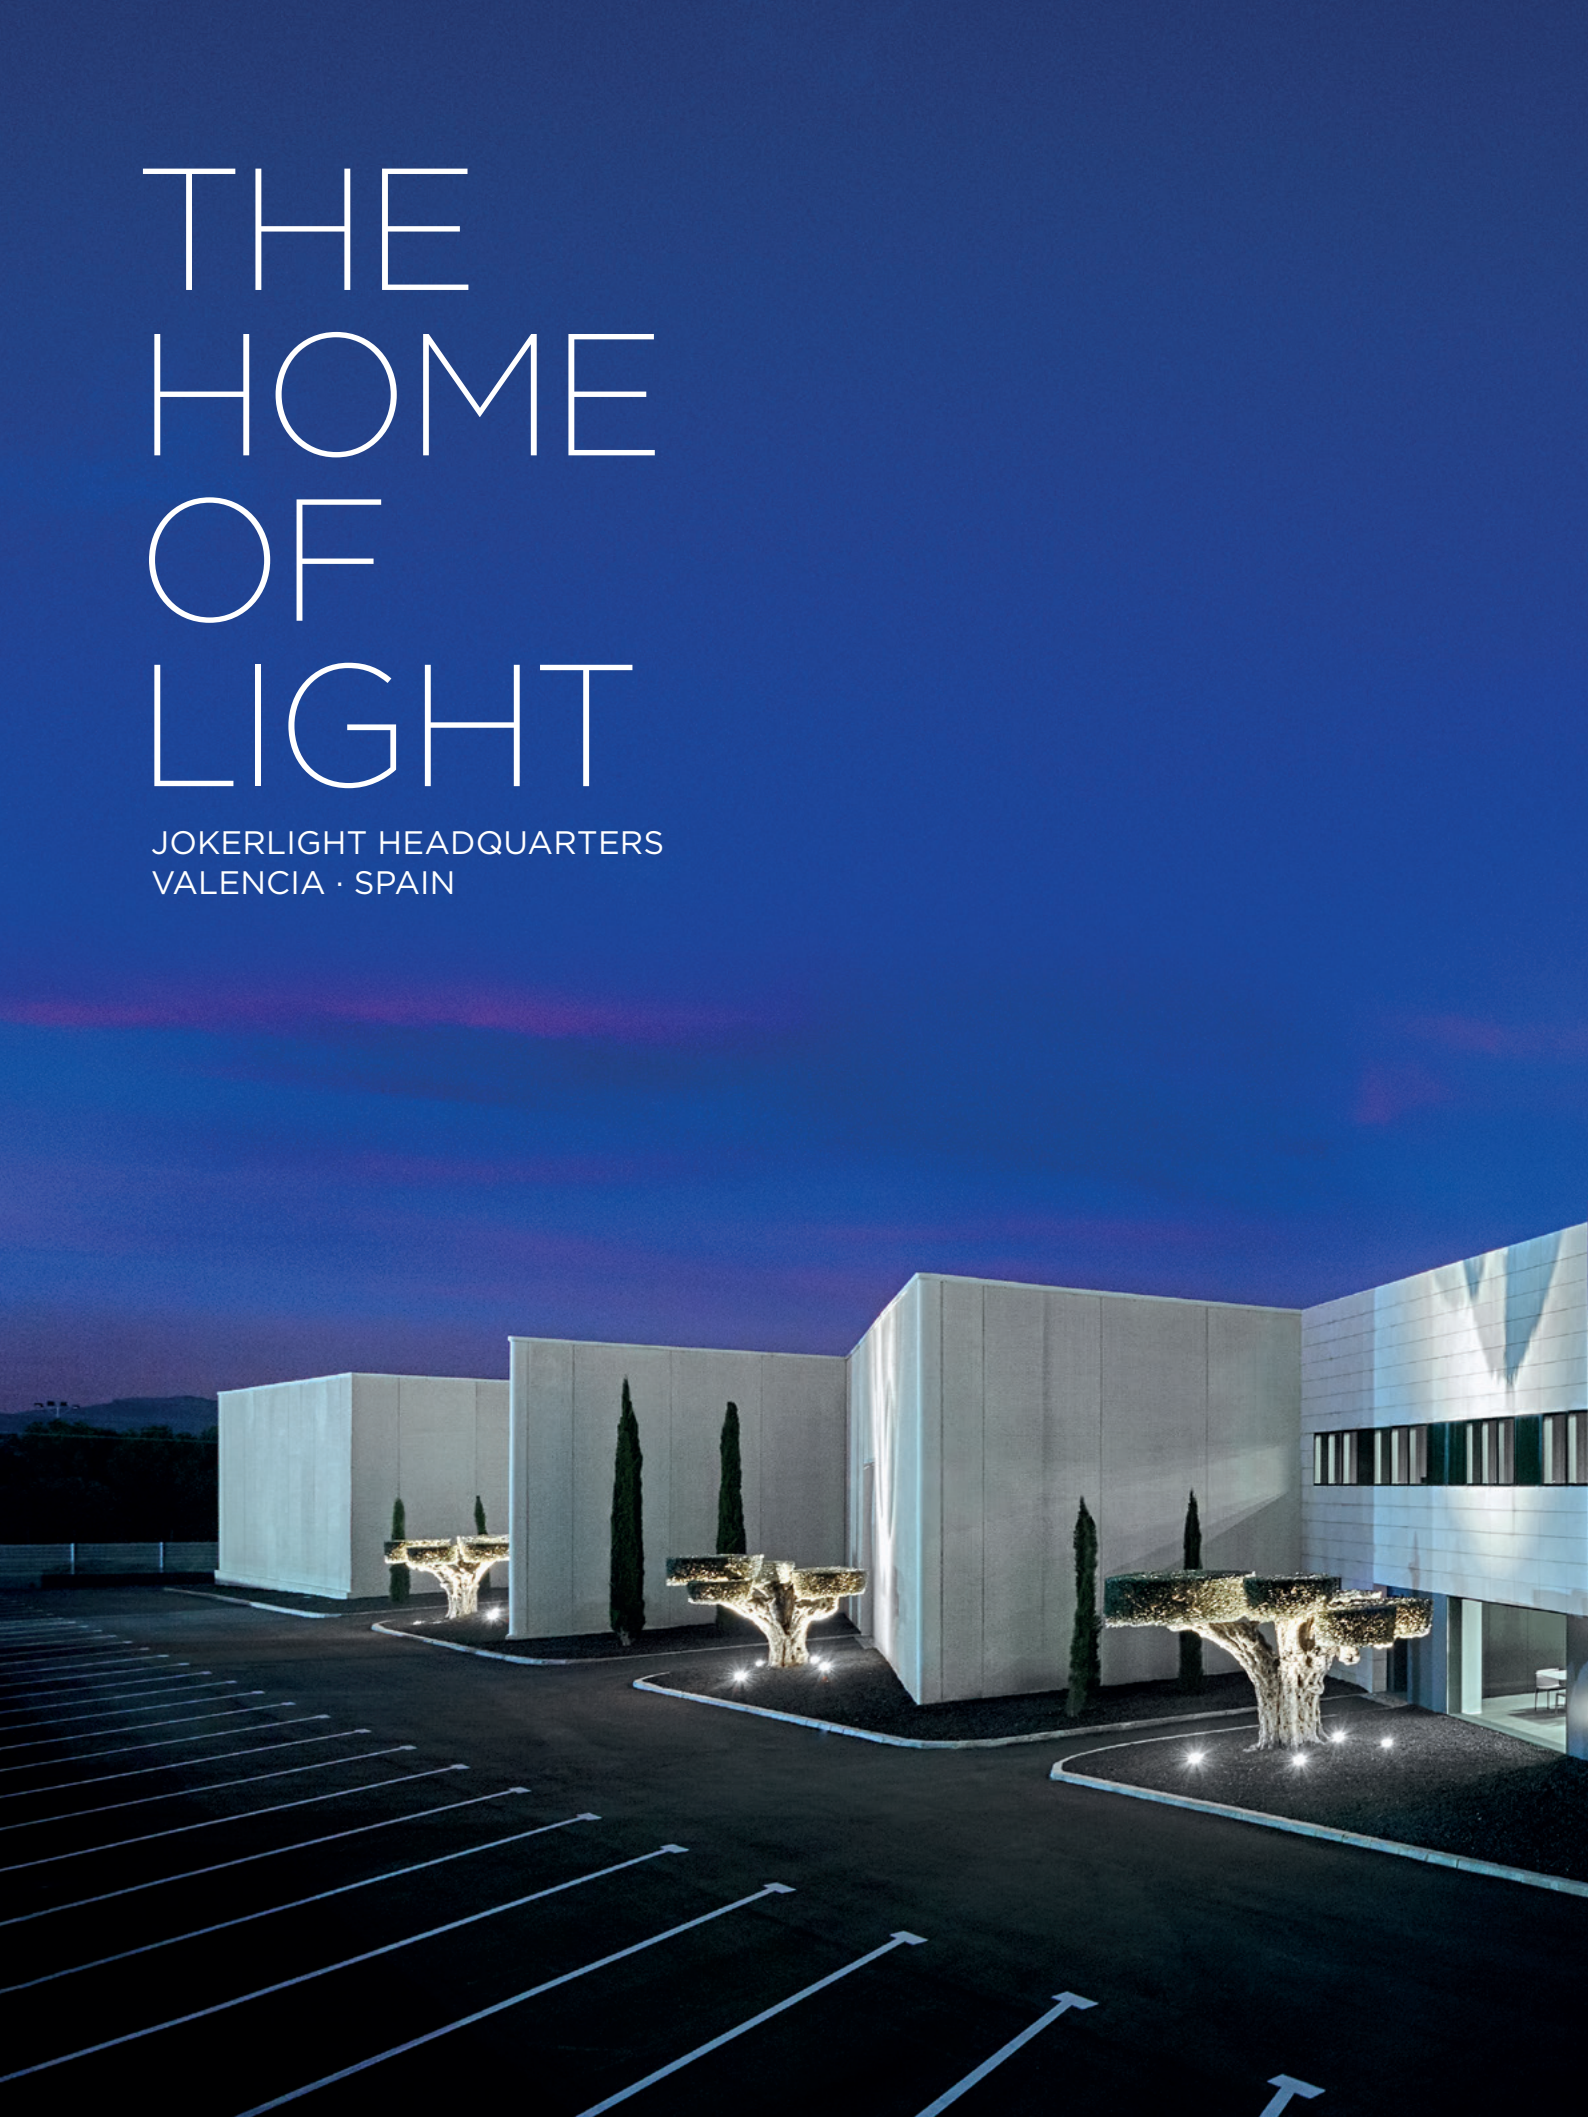





DE_
SIGN

AWARDS

RED DOT DESIGN AWARD

2020 | **MINIMAL TRACK**
2020 | **MINIMAL TRACK**
2019 | **ART**
2015 | **SWAP**

IF DESIGN AWARD

2019 | **BLACK FOSTER**
2017 | **SHOT LIGHT**
2017 | **iO**
2015 | **SALT**
2013 | **ZEN**

GERMAN DESIGN AWARD

2019 | **SIX**
2016 | **SPIN**
2016 | **SALT**
2016 | **SWAP**

EUROPEAN PRODUCT DESIGN AWARD

2020 | **MINIMAL TRACK**
2019 | **TOP**
2018 | **POP UP**

DELTA AWARDS

2020 | **ART**
2020 | **MINIMAL TRACK**
2018 | **SHOT LIGHT**
2018 | **iO**
2014 | **STRAM**
2013 | **ZEN**
2012 | **LEX**

DESIGN PLUS

2012 | **LEX**

ARCHIPRODUCTS DESIGN AWARDS

2020 | **MINIMAL TRACK**
2020 | **ART**
2018 | **TOP**

GOOD DESIGN

2018 | **SIX**
2017 | **iO**

A'DESIGN AWARD

2015 | **SPIN**
2015 | **SKY**
2015 | **DROP**
2014 | **ZEN**

FX AWARD

2020 | **MINIMAL TRACK**
2019 | **ART**
2019 | **PLUS**

PREMIOS ADCV

2019 | **ART**
2019 | **PLUS**
2017 | **iO**

ICONIC AWARDS

2017 | **SHOT LIGHT**
2017 | **PUCK**
2016 | **SPIN**

BOY AWARD

2019 | **BLACK FOSTER**

PREMIO BID


2014 | **ZEN**

CEILING RECESSED


P09


P22


P30


P38


P62


P64


P66

MINIMAL TRACK


P74


P89

TRACK 48V


P92


P96


P100


P116


P120


P122


P124


P126


P138


P140

WALL LIGHT


P142


P42


P46



P50

P56


P60


P77


P78


P81


P82


P86


P102



P104


SURFACE


P110


P112

SUSPENSION


P128


P132


P134


P136

P09_BLACK FOSTER · **P22**_SHOT LIGHT · **P30**_SWAP · **P38**_LEX · **P42**_DEEP · **P46**_DROP · **P50**_STRAM · **P56**_MIX · **P60**_MADISON · **P62**_QUAD · **P64**_POP UP · **P66**_TWIST · **P74**_ALASKA 24V · **P77**_SIX XS 24V · **P78**_PLUS MICRO 24V · **P81**_IO MICRO 24V · **P82**_FIT 24V · **P86**_TOP MICRO 24V · **P89**_LINE MICRO 24V · **P92**_SIX 48V · **P96**_FIT 48V · **P100**_PLUS 48V · **P102**_iO 48V · **P104**_LINE 48V · **P110**_BLACK FOSTER SURFACE · **P112**_TOP · **P116**_PUCK · **P120**_SKY · **P122**_STRAM SURFACE · **P124**_iO SURFACE · **P126**_ZEN TUBE SURFACE · **P128**_ART · **P132**_HOLLY · **P134**_SPIN · **P136**_SALT · **P138**_BRIGIT · **P140**_BLACK FOSTER SUSPENSION · **P142**_REC



Photography: BIS Images

DESIGN AWARD 2019

BESTofyear HONOREE 2019 INTERIOR DESIGN

THE INVISIBLE BLACK

BLACK FOSTER



BLACK FOSTER Recessed 2 UL		CCT
	U319-2- ◎ -10- | N | WN | NMG |	2700K
	U319-2- ◎ -11- | N | WN | NMG |	3000K
	U319-2- ◎ -12- | N | WN | NMG |	4000K


ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 3.65 in (50 x 93 mm) | UGR <19 | 38° / 19°



BLACK FOSTER Recessed 3 UL		CCT
	U319-3- ◎ -10- | N | WN | NMG |	2700K
	U319-3- ◎ -11- | N | WN | NMG |	3000K
	U319-3- ◎ -12- | N | WN | NMG |	4000K

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 5.35 in (50 x 136 mm) | UGR <19 | 38° / 19°

◎	BEAM	LOR
0	38°	92%
1	19°	90%



DRIVER OPTIONS * REMOTE BOX-CASE L	Luminaire	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-18	BLACK FOSTER Recessed 2 UL	2.7W	4.3W	450mA	2700K	260Lm	1 to 7
					3000K	280Lm	
					4000K	330Lm	
	BLACK FOSTER Recessed 3 UL	4W	5.7W	450mA	2700K	390Lm	1 to 5
					3000K	420Lm	
					4000K	495Lm	

120-277 V | 50/60 Hz | ETL Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	450-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | N | WN | NMG | MATERIAL | AL | ABS+PC | RAL » 146

*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT




Photography: Héctor Rubio - Images Positive



		CCT
BLACK FOSTER Recessed 5 UL	U319-4- ⓪ -10- | N | WN | NMG |	2700K
	U319-4- ⓪ -11- | N | WN | NMG |	3000K
	U319-4- ⓪ -12- | N | WN | NMG |	4000K

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 8.75 in (50 x 222 mm) | UGR <19 | 38° / 19°

⓪	BEAM	LOR
0	38°	92%
1	19°	90%



DRIVER OPTIONS * REMOTE BOX-CASE L	Luminaire	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-18	BLACK FOSTER Recessed 5 UL	6.7W	8.5W	450mA	2700K	650Lm	1 to 3
					3000K	700Lm	
					4000K	825Lm	


120-277 V | 50/60 Hz | ETL Intertek

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE
**PHASE CUT DIM PLEASE CONSULT

0-10 V** | INCL

DISTANCE LED-DRIVER

AWG	450-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

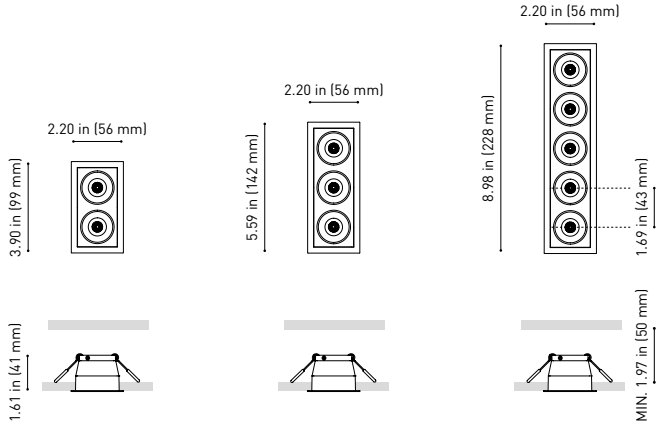

COLOR | N ■ | WN ■ | NMG ■ | MATERIAL | AL | ABS+PC | RAL ⓘ » 146

*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT




		CCT	LOR
BLACK FOSTER Asymmetric Recessed 2 UL	U374-20-10- | N | WN |	2700K	90%
	U374-20-11- | N | WN |	3000K	90%
	U374-20-12- | N | WN |	4000K	90%

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 3.65 in (50 x 93 mm) | 38°



		CCT	LOR
BLACK FOSTER Asymmetric Recessed 3 UL	U374-30-10- | N | WN |	2700K	90%
	U374-30-11- | N | WN |	3000K	90%
	U374-30-12- | N | WN |	4000K	90%

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 5.35 in (50 x 136 mm) | 38°



DRIVER OPTIONS *
REMOTE BOX-CASE L

	Luminaire	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-18	BLACK FOSTER Asymmetric Recessed 2 UL	2.7W	4.3W	450mA	2700K	260Lm	1 to 7
					3000K	280Lm	
					4000K	330Lm	
	BLACK FOSTER Asymmetric Recessed 3 UL	4W	5.7W	450mA	2700K	390Lm	1 to 5
					3000K	420Lm	
					4000K	495Lm	
	BLACK FOSTER Asymmetric Recessed 5 UL	6.7W	8.5W	450mA	2700K	650Lm	1 to 3
					3000K	700Lm	
					4000K	825Lm	

120-277 V | 50/60 Hz | ETL Intertek

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE
**BLACK FOSTER ASYMMETRIC RECESSED 5 UL: PHASE CUT DIM PLEASE CONSULT

0-10 V** | INCL

DISTANCE LED-DRIVER

AWG	450-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft


COLOR | N ■ | WN ■ | MATERIAL | AL | ABS+PC | RAL » 146

*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT



		CCT	LOR
BLACK FOSTER Asymmetric Recessed 5 UL	**U374-40-10- | N | WN |**	2700K	90%
	U374-40-11- | N | WN |	3000K	90%
	U374-40-12- | N | WN |	4000K	90%

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 8.75 in (50 x 222 mm) | 38°

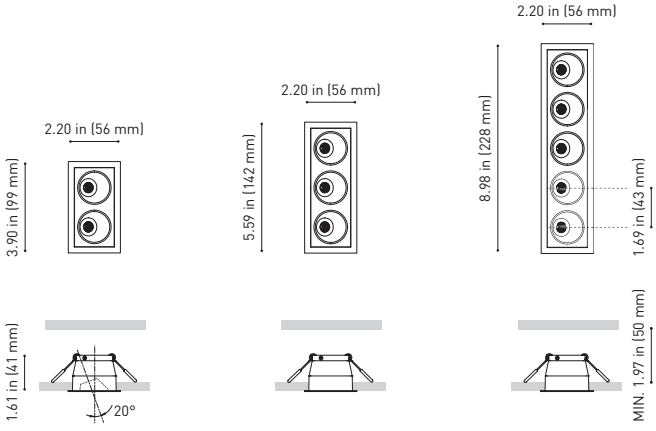


COLOR | N ■ | WN ■ | MATERIAL | AL | ABS+PC | RAL » 146

*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT




Private residence · Casa en Ses Torres | Design: Gallardo-Llopis Arquitectos | Photography: Germán Cabo

TRIMLESS INSTALLATION GUIDE
https://youtu.be/SVWNEfbIfVY

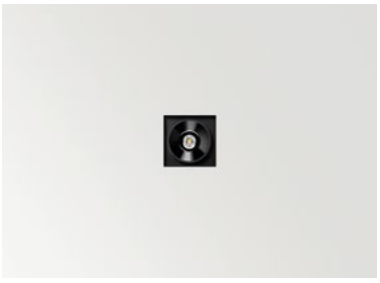

BLACK FOSTER Trimless 1 UL		CCT
	U318-1- ◎ -10- | N | NMG |	2700K
	U318-1- ◎ -11- | N | NMG |	3000K
	U318-1- ◎ -12- | N | NMG |	4000K


Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 1.97 in (50 x 50 mm) | UGR <19 | 38° / 19°

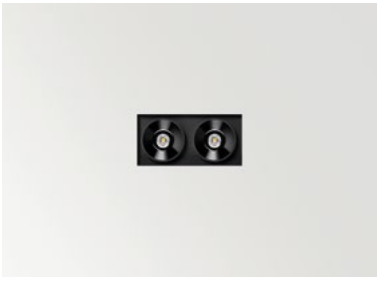

BLACK FOSTER Trimless 2 UL		CCT
	U318-2- ◎ -10- | N | NMG |	2700K
	U318-2- ◎ -11- | N | NMG |	3000K
	U318-2- ◎ -12- | N | NMG |	4000K

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 3.65 in (50 x 93 mm) | UGR <19 | 38° / 19°

◎	BEAM	LOR
0	38°	92%
1	19°	90%



DRIVER OPTIONS * REMOTE BOX-CASE L	Luminaire	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-36	BLACK FOSTER Trimless 1 UL	2.1W	3.8W	700mA	2700K	190Lm	1 to 12
					3000K	210Lm	
					4000K	250Lm	
	BLACK FOSTER Trimless 2 UL	4.2W	5.8W	700mA	2700K	380Lm	1 to 7
					3000K	420Lm	
					4000K	500Lm	

120-277 V | 50/60 Hz | Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | N | NMG | MATERIAL | AL | ABS+PC | RAL » 146

PLASTERBOARD CEILING, MANDATORY THICKNESS 0.50in (12.5mm). RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING
*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT




		CCT
BLACK FOSTER Trimless 3 UL	U318-3- ⓒⓓ -10- | N | NMG |	2700K
	U318-3- ⓒⓓ -11- | N | NMG |	3000K
	U318-3- ⓒⓓ -12- | N | NMG |	4000K

cETLus Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 5.35 in (50 x 136 mm) | UGR <19 | 38° / 19°



		CCT
BLACK FOSTER Trimless 5 UL	U318-4- ⓒⓓ -10- | N | NMG |	2700K
	U318-4- ⓒⓓ -11- | N | NMG |	3000K
	U318-4- ⓒⓓ -12- | N | NMG |	4000K

cETLus Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 8.75 in (50 x 222 mm) | UGR <19 | 38° / 19°



DRIVER OPTIONS * REMOTE BOX-CASE L

	Luminaire	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-36	BLACK FOSTER Trimless 3 UL	6.3W	8W	700mA	2700K	570Lm	1 to 5
					3000K	630Lm	
					4000K	750Lm	
	BLACK FOSTER Trimless 5 UL	10.5W	13W	700mA	2700K	950Lm	1 to 3
					3000K	1050Lm	
					4000K	1250Lm	
	BLACK FOSTER Trimless 10 UL	21W	24W	700mA	2700K	1900Lm	1
					3000K	2100Lm	
					4000K	2500Lm	
	BLACK FOSTER Trimless 15 UL	31.5W	37W	700mA	2700K	2850Lm	1
					3000K	3150Lm	
					4000K	3750Lm	

120-277 V | 50/60 Hz | cETLus Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | N ■ | NMG ■ | MATERIAL | AL | ABS+PC | RAL ⓘ » 146

PLASTERBOARD CEILING, MANDATORY THICKNESS 0.50in (12.5mm). RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING

*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT

TRIMLESS INSTALLATION GUIDE
https://youtu.be/SVWNEfbIfVY



CCT

BLACK FOSTER Trimless 10 UL	U318-5- ⓪ -10- | N | NMG |	2700K
	U318-5- ⓪ -11- | N | NMG |	3000K
	U318-5- ⓪ -12- | N | NMG |	4000K

DAMP LOCATION | CRI>90 | L80B10 >60.000 h | RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 17.20 in (50 x 437 mm) | UGR <19 | 38° / 19°




CCT

BLACK FOSTER Trimless 15 UL	U318-6- ⓪ -10- | N | NMG |	2700K
	U318-6- ⓪ -11- | N | NMG |	3000K
	U318-6- ⓪ -12- | N | NMG |	4000K

DAMP LOCATION | CRI>90 | L80B10 >60.000 h | RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 25.67 in (50 x 652 mm) | UGR <19 | 38° / 19°

⓪	BEAM	LOR
0	38°	92%
1	19°	90%

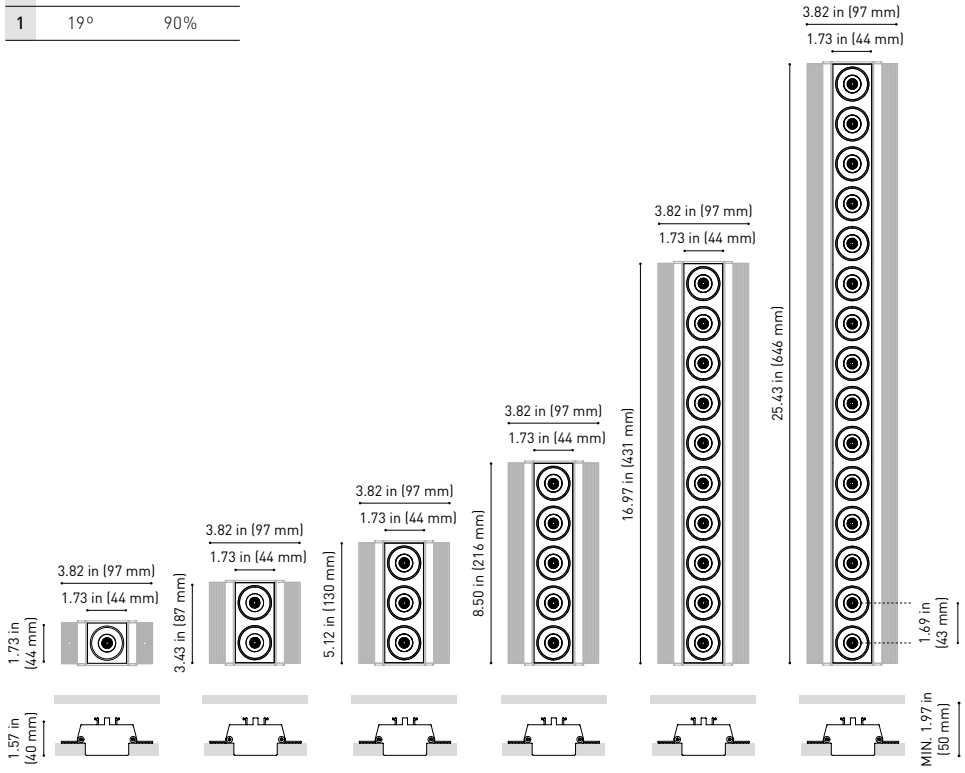

COLOR | N ■ | NMG ■ | MATERIAL | AL | ABS+PC | RAL ⓘ » 146

PLASTERBOARD CEILING, MANDATORY THICKNESS 0.50in (12.5mm). RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING

*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT

TRIMLESS INSTALLATION GUIDE
https://youtu.be/SVWNEfblfVY



House in Santa Barbara, Valencia (Spain) | Architecture: Victor García Martínez · Arquitecto | Photography: Hilke Sievers




		CCT	LOR
BLACK FOSTER **Asymmetric Trimless 2 UL**	**U373-20-10- | N |**	2700K	90%
	U373-20-11- | N |	3000K	90%
	U373-20-12- | N |	4000K	90%

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 3.65 in (50 x 93 mm) | 38°



		CCT	LOR
BLACK FOSTER **Asymmetric Trimless 3 UL**	**U373-30-10- | N |**	2700K	90%
	U373-30-11- | N |	3000K	90%
	U373-30-12- | N |	4000K	90%

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 5.35 in (50 x 136 mm) | 38°



DRIVER OPTIONS *
REMOTE BOX-CASE L

	Luminaire	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-36	BLACK FOSTER Asymmetric Trimless 2 UL	4.2W	5.8W	700mA	2700K	380Lm	1 to 7
					3000K	420Lm	
					4000K	500Lm	
	BLACK FOSTER Asymmetric Trimless 3 UL	6.3W	8W	700mA	2700K	570Lm	1 to 5
					3000K	630Lm	
					4000K	750Lm	

120-277 V | 50/60 Hz | ETL Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

TRIMLESS INSTALLATION GUIDE
https://youtu.be/SVWNEfblfVY

COLOR | N ■ | MATERIAL | AL | ABS+PC | RAL » 146

PLASTERBOARD CEILING, MANDATORY THICKNESS 0.50in (12.5mm). RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING
*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT




		CCT	LOR
BLACK FOSTER Asymmetric Trimless 5 UL	**U373-40-10- | N |**	2700K	90%
	U373-40-11- | N |	3000K	90%
	U373-40-12- | N |	4000K	90%

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 8.75 in (50 x 222 mm) | 38°



		CCT	LOR
BLACK FOSTER Asymmetric Trimless 10 UL	**U373-50-10- | N |**	2700K	90%
	U373-50-11- | N |	3000K	90%
	U373-50-12- | N |	4000K	90%

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 17.20 in (50 x 437 mm) | 38°



DRIVER OPTIONS *
REMOTE BOX-CASE L

	Luminaire	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-36	BLACK FOSTER Asymmetric Trimless 5 UL	10.5W	13W	700mA	2700K	950Lm	1 to 3
					3000K	1050Lm	
					4000K	1250Lm	
	BLACK FOSTER Asymmetric Trimless 10 UL	21W	24W	700mA	2700K	1900Lm	1
					3000K	2100Lm	
					4000K	2500Lm	
	BLACK FOSTER Asymmetric Trimless 15 UL	31.5W	37W	700mA	2700K	2850Lm	1
					3000K	3150Lm	
					4000K	3750Lm	

120-277 V | 50/60 Hz | ETL Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | N ■ | MATERIAL | AL | ABS+PC | RAL » 146


PLASTERBOARD CEILING, MANDATORY THICKNESS 0.50in (12.5mm). RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING
*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT

TRIMLESS INSTALLATION GUIDE
https://youtu.be/SVWNEfbIfVY



		CCT	LOR
BLACK FOSTER Asymmetric Trimless 15 UL	**U373-60-10- | N |**	2700K	90%
	U373-60-11- | N |	3000K	90%
	U373-60-12- | N |	4000K	90%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 1.97 x 25.67 in (50 x 652 mm) | 38°

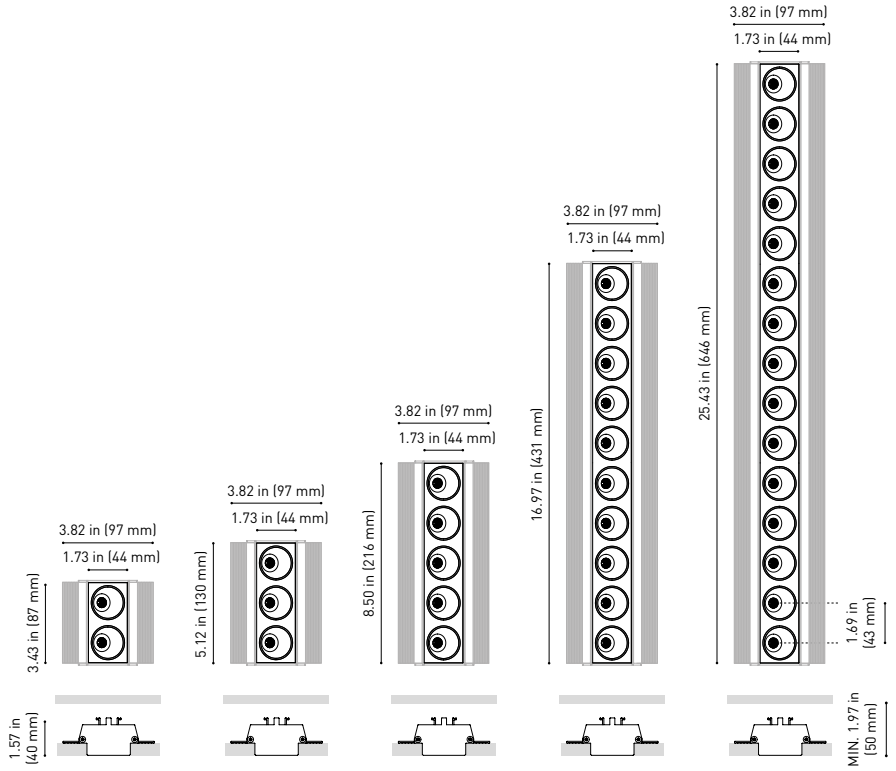

COLOR | N ■ | MATERIAL | AL | ABS+PC | RAL ⓘ » 146

PLASTERBOARD CEILING, MANDATORY THICKNESS 0.50in (12.5mm). RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING

*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT

TRIMLESS INSTALLATION GUIDE
https://youtu.be/SVWNEfblfVY



Arkoslight Headquarters, Valencia [Spain] | Design: Francesc Rifé Studio | Architect: Víctor García Martínez Arquitecto | Photography: David Zarzoso - Fotografía de arquitectura

DESIGN AWARD 2017

ICONIC AWARDS INTERIOR INNOVATION winner

Delta Selection Adi Awards 2018

THE INVISIBLE BLACK


SHOT LIGHT




		CCT	Beam	LOR
SHOT LIGHT	**U268-11-10- | N | NMG | WMG |**	2700K	19º	90%
UL	**U268-11-11- | N | NMG | WMG |**	3000K	19º	90%
	U268-11-12- | N | NMG | WMG |	4000K	19º	90%
	U268-11-20- | N | W | NMG | WMG |	2700K	38º	92%
	U268-11-21- | N | W | NMG | WMG |	3000K	38º	92%
	U268-11-22- | N | W | NMG | WMG |	4000K	38º	92%

Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h

IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | Ø 1.50 in (38 mm) | UGR <19 | 19º / 38º





DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-36	2.1W	3.8W	700mA	2700K	190Lm	1 to 12
				3000K	210Lm	
				4000K	250Lm	

120-277 V | 50/60 Hz | Intertek

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | N ■ | W □ | NMG ■ | WMG □ | MATERIAL | AL | ABS+PC | RAL » 146


*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
"THE INVISIBLE BLACK" IS NOT AVAILABLE FOR W COLOR




		CCT	Beam	LOR
SHOT LIGHT Trimless UL	**U269-11-10-** | **N** | **NMG** |	2700K	19°	90%
	U269-11-11- | **N** | **NMG** |	3000K	19°	90%
	U269-11-12- | **N** | **NMG** |	4000K	19°	90%
	U269-11-20- | **N** | **W** | **NMG** |	2700K	38°	92%
	U269-11-21- | **N** | **W** | **NMG** |	3000K	38°	92%
	U269-11-22- | **N** | **W** | **NMG** |	4000K	38°	92%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

IC RATED | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | EXCL** | Ø 1.70 in (43 mm) | UGR <19 | 19° / 38°





DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-36	2.1W	3.8W	700mA	2700K	190Lm	1 to 12
				3000K	210Lm	
				4000K	250Lm	

120-277 V | 50/60 Hz | Intertek

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE

0-10 V | INCL

DISTANCE LED-DRIVER

AWG	700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | N ■ | W □ | NMG ■ | MATERIAL | AL | ABS+PC | RAL » 146

*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
"THE INVISIBLE BLACK" IS NOT AVAILABLE FOR W COLOR


ACCESSORIES**

MANDATORY FOR TRIMLESS INSTALLATION


SHOT LIGHT Trimless Accessory U269-00-00




SHOT LIGHT Trimless Accessory 2 U269-00-01

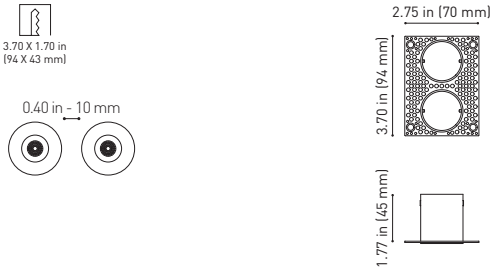

SHOT LIGHT Trimless Accessory 3 U269-00-02

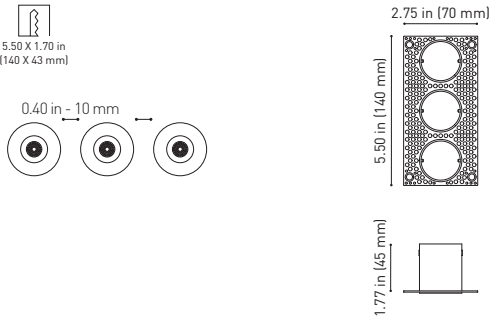


SHOT LIGHT Trimless Accessory 2x2 U269-00-03

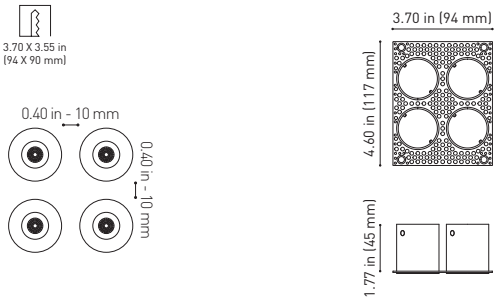


CUSTOM LAYOUT EXAMPLES

FOR EQUIDISTANT COMPOSITIONS

TRIMLESS Accessory 2 + Trimless Accessory 2 / Trimless Accessory 3

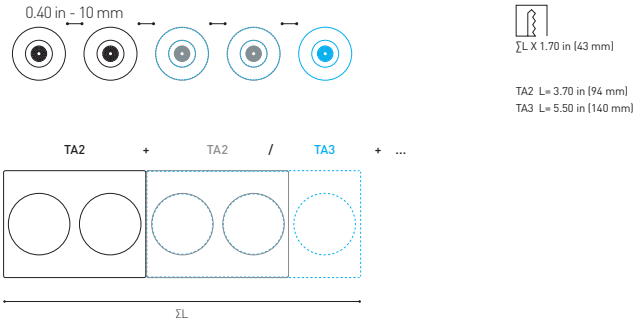


TRIMLESS Accessory 3 + Trimless Accessory 2 / Trimless Accessory 3

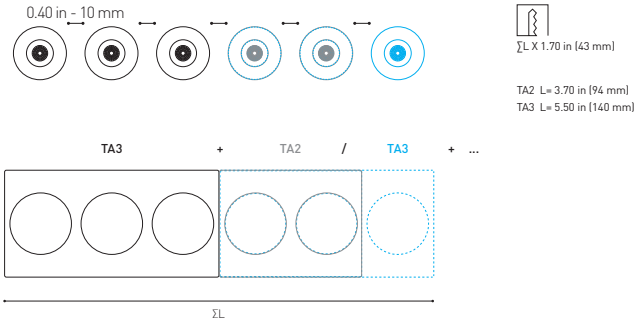

TRIMLESS Accessory 2x2 + Trimless Accessory 2x2

THE "TA2X2" FRAME IS ONLY COMPATIBLE WITH FURTHER "TA2X2" FRAMES

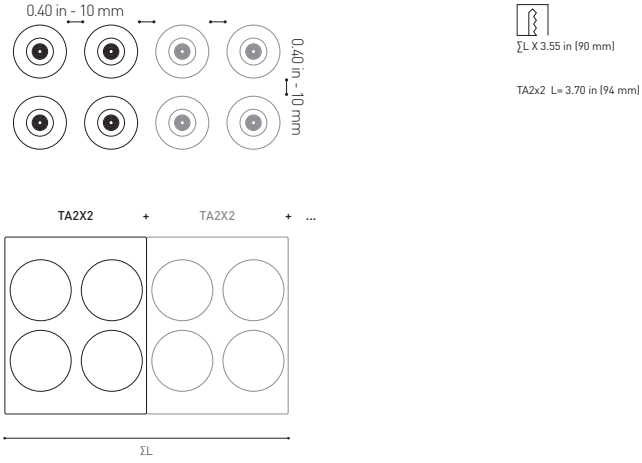





		CCT	LOR
SHOT LIGHT M UL	U297-01-10- | N | W | NMG | WMG |	2700K	86%
	U297-01-11- | N | W | NMG | WMG |	3000K	86%
	U297-01-12- | N | W | NMG | WMG |	4000K	86%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

IC RATED | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | Ø 2.95 in (75 mm) | UGR <19 | 38°





DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-23	6.5W	8W	200mA	2700K	910Lm	1
				3000K	940Lm	
				4000K	960Lm	

120-277 V | 50/60 Hz | Intertek


RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	500-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

OPTIONAL MOUNTING ACCESSORY: NEW CONSTRUCTION PLASTERFRAME S

U100-01-09 *TO BE USED WITH REMOTE BOX

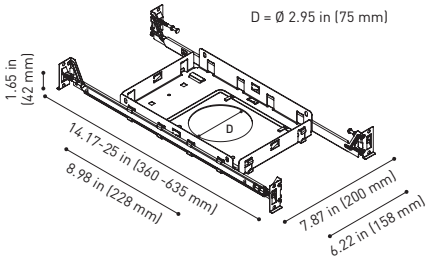


COLOR | N | W | NMG | WMG | MATERIAL | AL | ABS+PC | RAL » 146


*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
"THE INVISIBLE BLACK" IS NOT AVAILABLE FOR W COLOR



		CCT	LOR
SHOT LIGHT M Trimless UL	U298-01-10- | N | W | NMG |	2700K	90%
	U298-01-11- | N | W | NMG |	3000K	90%
	U298-01-12- | N | W | NMG |	4000K	90%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | RATED | MacAdam Step 2 | EXCL** | REQUIRED REMOTE DRIVER* | Ø 3.35 in (85 mm) | UGR <19 | 38°





DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-23	6.5W	8W	200mA	2700K	910Lm	1
				3000K	940Lm	
				4000K	960Lm	

120-277 V | 50/60 Hz | Intertek

RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	500-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft


ACCESSORY

SHOT LIGHT M Trimless UL Accessory**

U298-00-00

** MANDATORY FOR INSTALLATION

Ø 3.35 in (85 mm)



COLOR | N ■ | W □ | NMG ■ | MATERIAL | AL | ABS+PC | RAL » 146


*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
"THE INVISIBLE BLACK" IS NOT AVAILABLE FOR W COLOR




		CCT	LOR
SHOT LIGHT M **Asymmetric UL**	**U297-11-10- | N | W |**	2700K	83%
	U297-11-11- | N | W |	3000K	83%
	U297-11-12- | N | W |	4000K	83%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

RATED | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | Ø 2.95 in (75 mm) | 38°





DRIVER OPTIONS *
REMOTE BOX-CASE L

	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-23	6.5W	8W	200mA	2700K	910Lm	1
				3000K	940Lm	
				4000K	960Lm	

120-277 V | 50/60 Hz | Intertek


RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	500-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

OPTIONAL MOUNTING ACCESSORY:
NEW CONSTRUCTION PLASTERFRAME S

U100-01-09 *TO BE USED WITH REMOTE BOX

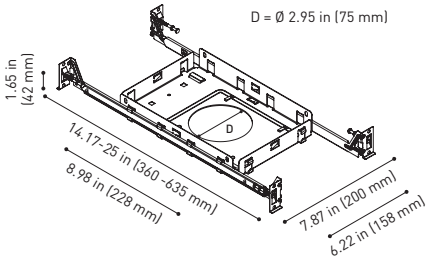

COLOR | N ■ | W □ | MATERIAL | AL | ABS+PC | RAL » 146


*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
"THE INVISIBLE BLACK" IS NOT AVAILABLE FOR W COLOR




		CCT	LOR
SHOT LIGHT M Asymmetric Trimless UL	**U298-11-10- | N | W |**	2700K	83%
	U298-11-11- | N | W |	3000K	83%
	U298-11-12- | N | W |	4000K	83%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

RATED | MacAdam Step 2 | EXCL** | REQUIRED REMOTE DRIVER* | Ø 3.35 in (85 mm) | 38°





DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-23	6.5W	8W	200mA	2700K	910Lm	1
				3000K	940Lm	
				4000K	960Lm	

120-277 V | 50/60 Hz | Intertek

RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER


AWG	500-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

ACCESSORY

SHOT LIGHT M Trimless UL Accessory**

U298-10-00

** MANDATORY FOR INSTALLATION



COLOR | N ■ | W □ | MATERIAL | AL | ABS+PC | RAL » 146

*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
"THE INVISIBLE BLACK" IS NOT AVAILABLE FOR W COLOR



Hayon Café. Viccarbe stand, Salone del Mobile Milano 2018, Milano (Italy) | Aleta chair by Jaime Hayon

reddot design award
winner 2015


GERMAN DESIGN AWARD NOMINEE 2016


SWAP



		CCT	LOR
SWAP M UL	U212-22-10- | W | R | G | Z | WN | N |	2700K	86%
	U212-22-11- | W | R | G | Z | WN | N |	3000K	86%
	U212-22-12- | W | R | G | Z | WN | N |	4000K	86%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | RATED | INCL \| ACC. | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | Ø 2.95 in (75 mm) | UGR <19 | 42°





DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-07	3.6W	6W	110mA	2700K	477Lm	1
				3000K	495Lm	
				4000K	504Lm	

120-277 V | 50/60 Hz | Intertek


RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	350mA	700mA
18	447 ft	224 ft
16	711 ft	356 ft
14	1132 ft	566 ft

OPTIONAL MOUNTING ACCESSORY: NEW CONSTRUCTION PLASTERFRAME S

U100-01-09 *TO BE USED WITH REMOTE BOX

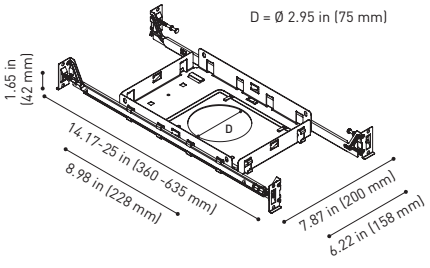

COLOR | W | R | G | Z | WN | N | MATERIAL | AL | PC | PC | RAL » 146


*DRIVER: UNIVERSAL LIGHTING TECHNOLOGIES | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
COLOURS MAY AFFECT THE LIGHTING PARAMETERS



		CCT	LOR
SWAP M Asymmetric UL	U216-22-10- | W | R | G | Z | WN | N |	2700K	86%
	U216-22-11- | W | R | G | Z | WN | N |	3000K	86%
	U216-22-12- | W | R | G | Z | WN | N |	4000K	86%

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

IC RATED | INCL | ACC. | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | Ø 2.95 in (75 mm) | 45°



DRIVER OPTIONS *
REMOTE BOX-CASE L

	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-07	3.6W	6W	110mA	2700K	477Lm	1
				3000K	495Lm	
				4000K	504Lm	

120-277 V | 50/60 Hz | ETL Intertek


RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	350mA	700mA
18	447 ft	224 ft
16	711 ft	356 ft
14	1132 ft	566 ft

OPTIONAL MOUNTING ACCESSORY:
NEW CONSTRUCTION PLASTERFRAME S

U100-01-09 *TO BE USED WITH REMOTE BOX

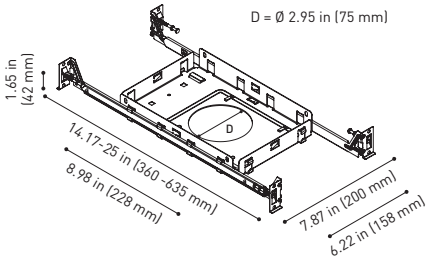

COLOR | W | R | G | Z | WN | N | MATERIAL | AL | PC | PC | RAL » 146

*DRIVER: UNIVERSAL LIGHTING TECHNOLOGIES | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
COLOURS MAY AFFECT THE LIGHTING PARAMETERS



Private residence, Valencia (Spain) | Design: Leticia Vila & Vicente Olivares · Estudio Roocm | Photography: Héctor Rubio · Images Positive





Peydro Herrero · Odontología Avanzada, Valencia (Spain) | Design: Francesc Rifé Studio | Photography: David Zarzoso · Fotografía de arquitectura



		CCT	LOR
SWAP L UL	U212-32-10- | W | R | G | Z | WN | N |	2700K	86%
	U212-32-11- | W | R | G | Z | WN | N |	3000K	86%
	U212-32-12- | W | R | G | Z | WN | N |	4000K	86%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | RATED | INCL \| ACC. | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | Ø 3.35 in (85 mm) | UGR <19 | 40°





DRIVER OPTIONS *
REMOTE BOX-CASE L

	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-07	3.6W	6W	110mA	2700K	477Lm	1
				3000K	495Lm	
				4000K	504Lm	

120-277 V | 50/60 Hz | Intertek


RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	350mA	700mA
18	447 ft	224 ft
16	711 ft	356 ft
14	1132 ft	566 ft

OPTIONAL MOUNTING ACCESSORY:
NEW CONSTRUCTION PLASTERFRAME S

U100-01-10 *TO BE USED WITH REMOTE BOX

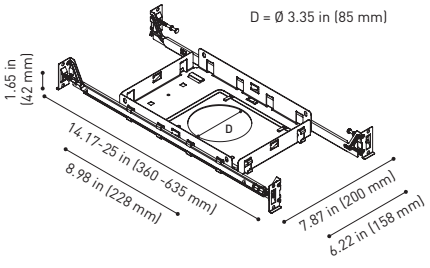

COLOR | W | R | G | Z | WN | N | MATERIAL | AL | PC | PC | RAL » 146


*DRIVER: UNIVERSAL LIGHTING TECHNOLOGIES | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
COLOURS MAY AFFECT THE LIGHTING PARAMETERS




		CCT	LOR
SWAP L Asymmetric UL	U216-32-10- | W | R | G | Z | WN | N |	2700K	86%
	U216-32-11- | W | R | G | Z | WN | N |	3000K	86%
	U216-32-12- | W | R | G | Z | WN | N |	4000K	86%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

IC RATED | INCL | ACC. | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | Ø 3.35 in (85 mm) | 43°





DRIVER OPTIONS *
REMOTE BOX-CASE L

	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-07	3.6W	6W	110mA	2700K	477Lm	1
				3000K	495Lm	
				4000K	504Lm	

120-277 V | 50/60 Hz | Intertek


RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	350mA	700mA
18	447 ft	224 ft
16	711 ft	356 ft
14	1132 ft	566 ft

OPTIONAL MOUNTING ACCESSORY:
NEW CONSTRUCTION PLASTERFRAME S

U100-01-10 *TO BE USED WITH REMOTE BOX

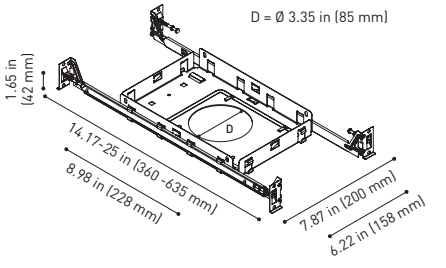

COLOR | W | R | G | Z | WN | N | MATERIAL | AL | PC | PC | RAL » 146

*DRIVER: UNIVERSAL LIGHTING TECHNOLOGIES | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
COLOURS MAY AFFECT THE LIGHTING PARAMETERS



Buff Offices, Igualada (Spain) | Design: PH5 Design | Photography: Marc Llibre Roig - Fotograf



Power Electronics - Offices. Valencia (Spain) | Interior design: Francesc Rifé Studio | Photography: Héctor Rubio & David Zarzoso

DESIGN PLUS
2012 AWARD


Premios
Delta'12
Selección


LEX



		CCT	LOR
LEX UL	U070-01-00- | W | R | G | Z | WN | N |	2700K	70%
	U070-01-01- | W | R | G | Z | WN | N |	3000K	70%
	U070-01-02- | W | R | G | Z | WN | N |	4000K	70%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | Ø5.50 in (140mm) | UGR <19 | 71°





DRIVER OPTIONS * REMOTE BOX-CASE L

	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-13	7.1W	10W	220mA	2700K	952Lm	1
				3000K	989Lm	
				4000K	1005Lm	

120-277 V | 50/60 Hz | Intertek


RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	350mA	700mA
18	447 ft	224 ft
16	711 ft	356 ft
14	1132 ft	566 ft

OPTIONAL MOUNTING ACCESSORY: NEW CONSTRUCTION PLASTERFRAME L

U100-01-14 *TO BE USED WITH REMOTE BOX

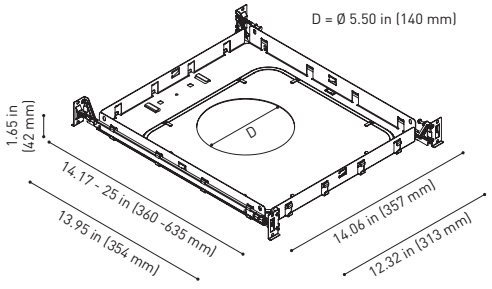

COLOR | W | R | G | Z | WN | N | MATERIAL | AL | PC | RAL » 146


*DRIVER: UNIVERSAL LIGHTING TECHNOLOGIES | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
COLOURS MAY AFFECT THE LIGHTING PARAMETERS






		CCT	LOR
LEX Asymmetric UL	U071-01-00- | W | R | G | Z | WN | N |	2700K	70%
	U071-01-01- | W | R | G | Z | WN | N |	3000K	70%
	U071-01-02- | W | R | G | Z | WN | N |	4000K	70%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | Ø5.50 in (140mm) | UGR <19 | 60°





DRIVER OPTIONS *
REMOTE BOX-CASE L

	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-13	7.1W	10W	220mA	2700K	952Lm	1
				3000K	989Lm	
				4000K	1005Lm	

120-277 V | 50/60 Hz | Intertek


RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	350mA	700mA
18	447 ft	224 ft
16	711 ft	356 ft
14	1132 ft	566 ft

OPTIONAL MOUNTING ACCESSORY:
NEW CONSTRUCTION PLASTERFRAME L

U100-01-14 *TO BE USED WITH REMOTE BOX

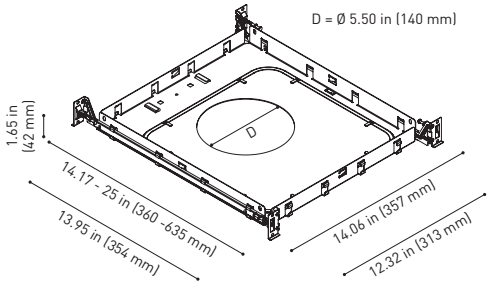

COLOR | W | R | G | Z | WN | N | MATERIAL | AL | PC | RAL » 146

*DRIVER: UNIVERSAL LIGHTING TECHNOLOGIES | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
COLOURS MAY AFFECT THE LIGHTING PARAMETERS




Arkoslight Headquarters, Valencia (Spain) | Design: Francesc Rifé Studio | Architect: Víctor García Martínez Arquitecto | Photography: David Zarzoso - Fotografía de arquitectura



		CCT	LOR
DEEP UL	U249-01-10- | WT |	2700K	85%
	U249-01-11- | WT |	3000K	85%
	U249-01-12- | WT |	4000K	85%


Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h


IC RATED | MacAdam Step 2 | FAST | CONNEC | Ø 8.07 in (205 mm) | 94°



MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION DEEP UL.



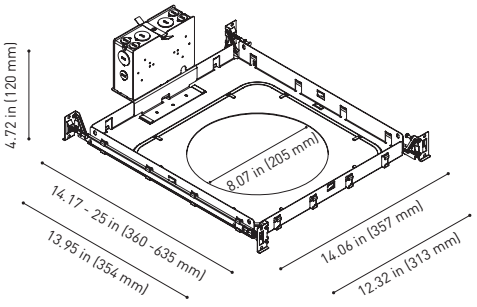

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	U100-00-02	12W	14W	400mA	2700K	1720Lm
					3000K	1855Lm
					4000K	1885Lm
	U100-00-04	22W	25W	700mA	2700K	2800Lm
					3000K	3025Lm
					4000K	3075Lm
NEW CONSTRUCTION PLASTER FRAME L	U100-00-06	12W	14W	400mA	2700K	1720Lm
					3000K	1855Lm
					4000K	1885Lm
	U100-00-08	22W	25W	700mA	2700K	2800Lm
					3000K	3025Lm
					4000K	3075Lm

120/277 V | 50/60 Hz | Intertek

0-10V / TRIAC/ELV* | FAST | CONNEC | INCL

COLOR | WT ☐ | MATERIAL | AL | PMMA | RAL ⓘ » 146


FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC/ELV DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: ERP-PSB SERIES OR SIMILAR



		CCT	LOR
DEEP Mini UL	U250-01-10- | WT |	2700K	76%
	U250-01-11- | WT |	3000K	76%
	U250-01-12- | WT |	4000K	76%


Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h


IC RATED | MacAdam Step 2 | FAST | CONNEC | Ø 4.80 in (122 mm) | 89°

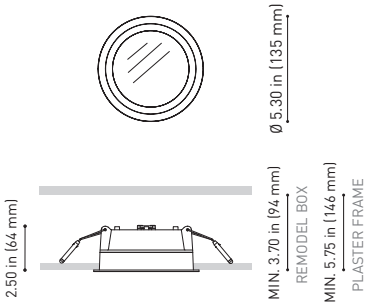

MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION DEEP MINI UL.



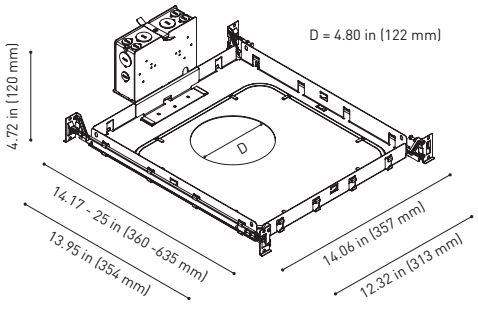

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	U100-00-50	10W	13W	700mA	2700K	1280Lm
					3000K	1375Lm
					4000K	1400Lm
NEW CONSTRUCTION PLASTER FRAME L	U100-00-51	10W	13W	700mA	2700K	1280Lm
					3000K	1375Lm
					4000K	1400Lm

120-277 V | 50/60 Hz | Intertek

0-10V / TRIAC* | FAST | CONNEC | INCL

COLOR | WT ☐ | MATERIAL | AL | PMMA | RAL ⓘ » 146

FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: APS L9WCD SERIES OR SIMILAR



Private residence - 50 shades of White, Samara (Russia) | Design: Dmitri Kanivetc



Casa M, Madrid (Spain) | Design: Mirror Arquitectos | Builder: Moguerza | Photography: BIStimages Architectural Photography


A'DESIGN AWARD
WINNER 2015
I R O N

DROP

		CCT	LOR
DROP UL	U193-01-10- | WT |	2700K	86%
	U193-01-11- | WT |	3000K	86%
	U193-01-12- | WT |	4000K	86%


Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h


IC RATED | MacAdam Step 2 | FAST | CONNEC | Ø 9.65 in (245 mm) | 98°



MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION DROP UL.



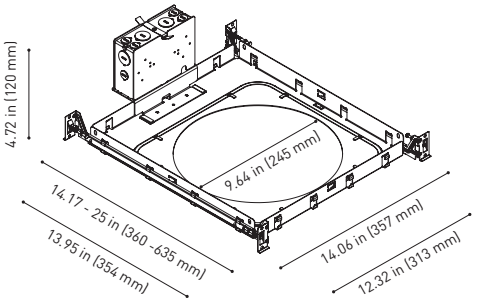

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	U100-00-02	12W	14W	400mA	2700K	1720Lm
					3000K	1855Lm
					4000K	1885Lm
	U100-00-04	22W	25W	700mA	2700K	2800Lm
					3000K	3025Lm
					4000K	3075Lm
NEW CONSTRUCTION PLASTER FRAME L	U100-00-10	12W	14W	400mA	2700K	1720Lm
					3000K	1855Lm
					4000K	1885Lm
	U100-00-12	22W	25W	700mA	2700K	2800Lm
					3000K	3025Lm
					4000K	3075Lm

120/277 V | 50/60 Hz | Intertek

0-10V / TRIAC/ELV* | FAST | CONNEC | INCL


COLOR | WT ☐ | MATERIAL | AL | PMMA | RAL ⓘ » 146

FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC/ELV DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: ERP-PSB SERIES OR SIMILAR

		CCT	LOR
DROP Mini UL	U194-01-10- | **WT** |	2700K	78%
	U194-01-11- | **WT** |	3000K	78%
	U194-01-12- | **WT** |	4000K	78%


Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h


IC RATED | MacAdam Step 2 | FAST | CONNEC | Ø 5.50 in (140 mm) | 94°

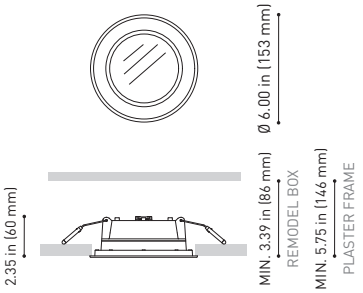

MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION DROP MINI UL.



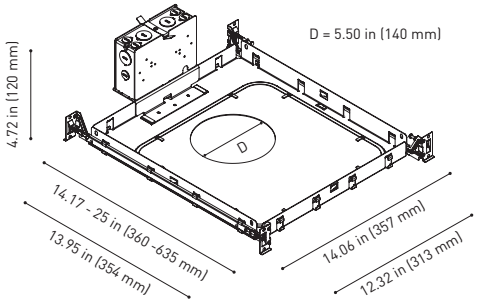

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	**U100-00-50**	10W	13W	700mA	2700K	1280Lm
					3000K	1375Lm
					4000K	1400Lm
NEW CONSTRUCTION PLASTER FRAME L	**U100-0052**	10W	13W	700mA	2700K	1280Lm
					3000K	1375Lm
					4000K	1400Lm

120-277 V | 50/60 Hz | Intertek

0-10V / TRIAC* | FAST | CONNEC | INCL

COLOR | **WT** ☐ | MATERIAL | **AL** | **PMMA** | RAL » 146

FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: APS L9WCD SERIES OR SIMILAR





Bulthaup Showroom, Valencia [Spain] | Design: Alfredo Monzó | Photography: Héctor Rubio · Images Positive

DELTA AWARDS'14
Selected


STRAM



		CCT	LOR
STRAM Prismatic UL	U198-01-10- | **WT** |	2700K	87%
	U198-01-11- | **WT** |	3000K	87%
	U198-01-12- | **WT** |	4000K	87%


Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h


RATED | MacAdam Step 2 | FAST | CONNEC | Ø 8.07 in (205 mm) | 93°

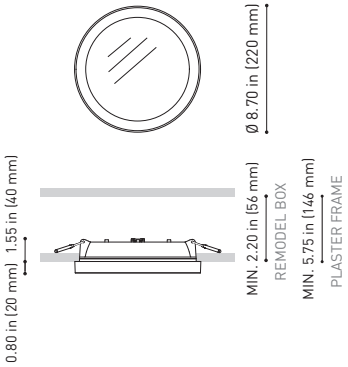

MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION STRAM PRISMATIC UL.



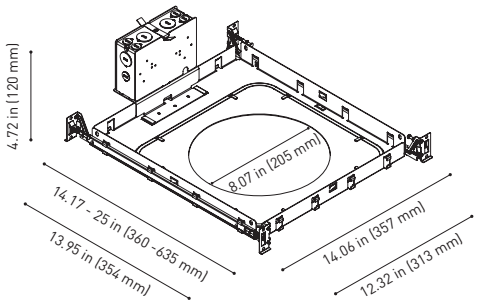

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	**U100-00-02**	12W	14W	400mA	2700K	1720Lm
					3000K	1855Lm
					4000K	1885Lm
	U100-00-04	22W	25W	700mA	2700K	2800Lm
					3000K	3025Lm
					4000K	3075Lm
NEW CONSTRUCTION PLASTER FRAME L	**U100-00-06**	12W	14W	400mA	2700K	1720Lm
					3000K	1855Lm
					4000K	1885Lm
	U100-00-08	22W	25W	700mA	2700K	2800Lm
					3000K	3025Lm
					4000K	3075Lm

120/277 V | 50/60 Hz | Intertek

0-10V / TRIAC/ELV* | FAST | CONNEC | INCL

COLOR | **WT** ☐ | MATERIAL | **AL** | **PMMA** | RAL ⓘ » 146


FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC/ELV DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: ERP-PSB SERIES OR SIMILAR



		CCT	LOR
STRAM UL	U197-01-10- | WT |	2700K	87%
	U197-01-11- | WT |	3000K	87%
	U197-01-12- | WT |	4000K	87%


Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h


IC RATED | MacAdam Step 2 | FAST | CONNEC | Ø 8.07 in (205 mm) | 99°

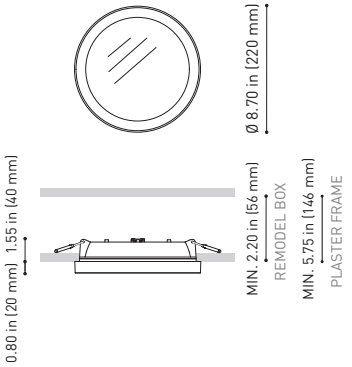

MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION STRAM UL.



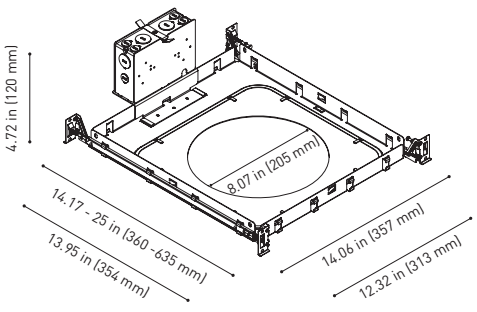

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	U100-00-02	12W	14W	400mA	2700K	1720Lm
					3000K	1855Lm
					4000K	1885Lm
	U100-00-04	22W	25W	700mA	2700K	2800Lm
					3000K	3025Lm
					4000K	3075Lm
NEW CONSTRUCTION PLASTER FRAME L	U100-00-06	12W	14W	400mA	2700K	1720Lm
					3000K	1855Lm
					4000K	1885Lm
	U100-00-08	22W	25W	700mA	2700K	2800Lm
					3000K	3025Lm
					4000K	3075Lm

120/277 V | 50/60 Hz | Intertek

0-10V / TRIAC/ELV* | FAST | CONNEC | INCL

COLOR | WT ☐ | MATERIAL | AL | PMMA | RAL ⓘ » 146

FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC/ELV DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: ERP-PSB SERIES OR SIMILAR




Private residence, Valencia (Spain) | Design: Óscar Moscardó · ÓMR Studio | Photography: Diego Opazo Fotografía



		CCT	LOR
STRAM Mini Prismatic UL	**U237-01-10- | WT |**	2700K	80%
	U237-01-11- | WT |	3000K	80%
	U237-01-12- | WT |	4000K	80%


ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h


IC RATED | MacAdam Step 2 | FAST | CONNEC | Ø 4.80 in (122 mm) | 87°

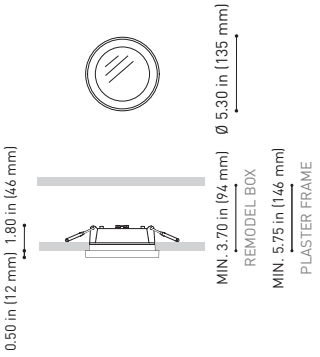

MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION STRAM MINI PRISMATIC UL.



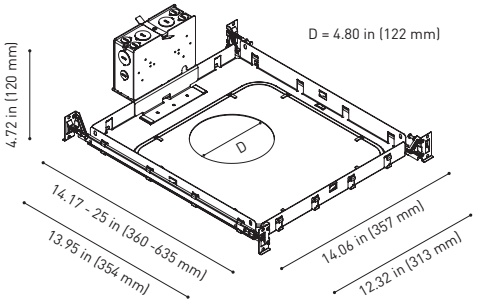

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	**U100-00-50**	10W	13W	700mA	2700K	1280Lm
					3000K	1375Lm
					4000K	1400Lm
NEW CONSTRUCTION PLASTER FRAME L	**U100-00-51**	10W	13W	700mA	2700K	1280Lm
					3000K	1375Lm
					4000K	1400Lm

120-277 V | 50/60 Hz | ETL Intertek

0-10V / TRIAC* | FAST | CONNEC | INCL

COLOR | **WT** ☐ | MATERIAL | **AL** | **PMMA** | RAL ⓘ » 146


FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: APS L9WCD SERIES OR SIMILAR



		CCT	LOR
STRAM Mini UL	U236-01-10- | WT |	2700K	80%
	U236-01-11- | WT |	3000K	80%
	U236-01-12- | WT |	4000K	80%


ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h


IC RATED | MacAdam Step 2 | FAST | CONNEC | Ø 4.80 in (122 mm) | 100°

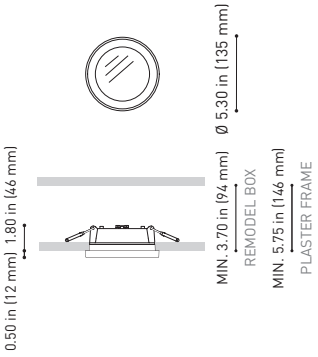

MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION STRAM MINI UL.



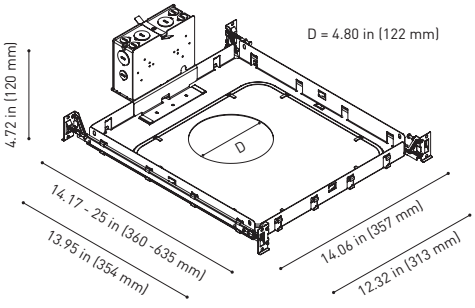

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	U100-00-50	10W	13W	700mA	2700K	1280Lm
					3000K	1375Lm
					4000K	1400Lm
NEW CONSTRUCTION PLASTER FRAME L	U100-00-51	10W	13W	700mA	2700K	1280Lm
					3000K	1375Lm
					4000K	1400Lm

120-277 V | 50/60 Hz | ETL Intertek

0-10V / TRIAC* | FAST | CONNEC | INCL

COLOR | WT ☐ | MATERIAL | AL | PMMA | RAL ⓘ » 146


FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: APS L9WCD SERIES OR SIMILAR






		CCT	LOR
MIX UL	U187-01-10- | W | Z |	2700K	83%
	U187-01-11- | W | Z |	3000K	83%
	U187-01-12- | W | Z |	4000K	83%


ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 2 | FAST \| CONNEC | Ø 8.07 in (205 mm) | 102°



MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION MIX UL.



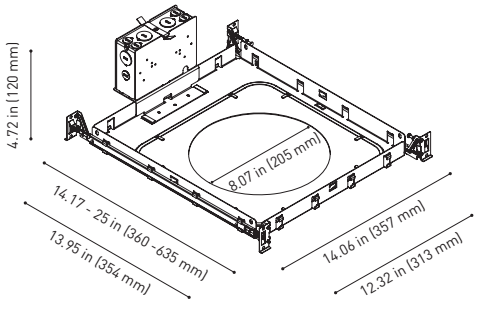

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	U100-00-02	12W	14W	400mA	2700K	1720Lm
					3000K	1855Lm
					4000K	1885Lm
	U100-00-04	22W	25W	700mA	2700K	2800Lm
					3000K	3025Lm
					4000K	3075Lm
NEW CONSTRUCTION PLASTER FRAME L	U100-00-06	12W	14W	400mA	2700K	1720Lm
					3000K	1855Lm
					4000K	1885Lm
	U100-00-08	22W	25W	700mA	2700K	2800Lm
					3000K	3025Lm
					4000K	3075Lm


120/277 V | 50/60 Hz | ETL Intertek | 0-10V / TRIAC/ELV* | FAST \| CONNEC | INCL

COLOR | W ☐ | Z ■ | MATERIAL | AL | PMMA | RAL ⓘ » 146

FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC/ELV DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: ERP-PSB SERIES OR SIMILAR


		CCT	LOR
MIX **Mini UL**	**U188-01-10-** | **W** | **Z** |	2700K	75%
	U188-01-11- | **W** | **Z** |	3000K	75%
	U188-01-12- | **W** | **Z** |	4000K	75%


Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | IC RATED | MacAdam Step 2 | FAST | CONNEC | Ø 4.80 in (122 mm) | 97°

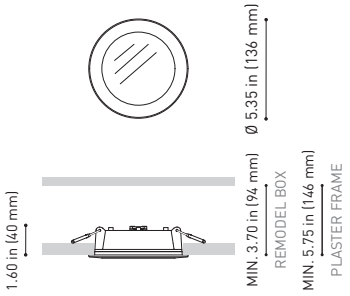

MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION MIX MINI UL.



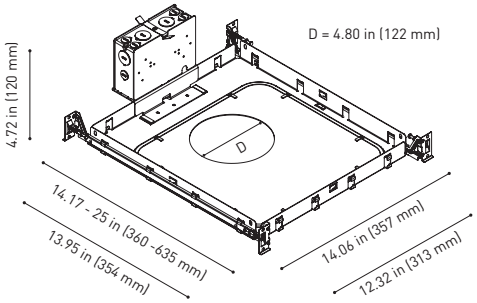

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	**U100-00-50**	10W	13W	700mA	2700K	1280Lm
					3000K	1375Lm
					4000K	1400Lm
NEW CONSTRUCTION PLASTER FRAME L	**U100-00-51**	10W	13W	700mA	2700K	1280Lm
					3000K	1375Lm
					4000K	1400Lm

120-277 V | 50/60 Hz | Intertek | 0-10V / TRIAC* | FAST | CONNEC | INCL

COLOR | W ☐ | Z ■ | MATERIAL | AL | PMMA | RAL ⓘ » 146

FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: APS L9WCD SERIES OR SIMILAR



Photography: Joao Morgado · Fotografía de Arquitectura




Private residence in San Sebastián – Donostia (Spain) | Design: Ziako Interiorismo | Photography: Luis M. Ambrós

MADISON

		CCT	LOR
MADISON UL	U190-01-11- | W | Z |	3000K	82%
	U190-01-12- | W | Z |	4000K	82%


Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

IC RATED | MacAdam Step 2 | FAST | CONNEC | 8.07 x 8.07 in (205 x 205 mm) | 100°

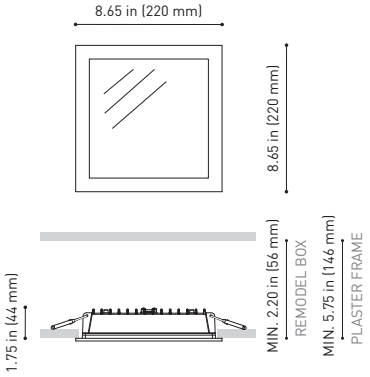


MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION MADISON UL.



	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	U100-00-02	12W	14W	400mA	3000K	1855Lm
					4000K	1885Lm
	U100-00-04	22W	25W	700mA	3000K	3025Lm
					4000K	3075Lm
NEW CONSTRUCTION PLASTER FRAME L	U100-00-14	12W	14W	400mA	3000K	1855Lm
					4000K	1885Lm
	U100-00-16	22W	25W	700mA	3000K	3025Lm
					4000K	3075Lm

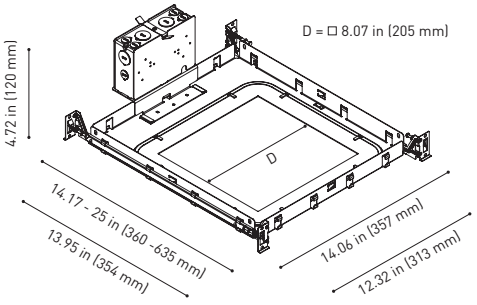

120/277 V | 50/60 Hz | Intertek

0-10V / TRIAC/ELV* | FAST | CONNEC | INCL

COLOR | W □ | Z ■ | MATERIAL | AL | PMMA | RAL (i) » 146

FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC/ELV DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: ERP-PSB SERIES OR SIMILAR




Private Residence, Vantaa (Finland) | Design: Pieni talo Helsingissä, Studio Kalliomäki & Petri Hiltula, Kontoituote Oy | Photography: Kontio Log Houses

		CCT	LOR
QUAD UL	U189-01-11- | W | Z |	3000K	76%
	U189-01-12- | W | Z |	4000K	76%


Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h


IC RATED | MacAdam Step 2 | FAST | CONNEC | Ø 8.07 in (205 mm) | 102°

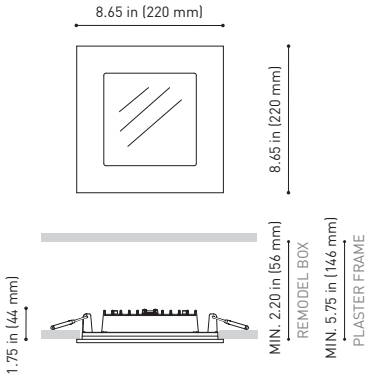

MOUNTING ACCESSORIES (Required)

ROUGH-IN SECTION TO BE USED WITH JOKERLIGHT FINISHING SECTION QUAD UL.



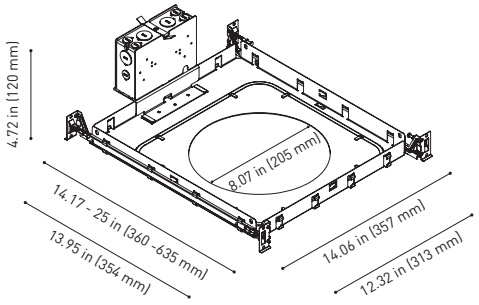

	Reference	P	Psystem	I(led)	CCT	Flux
REMODEL BOX	U100-00-02	12W	14W	400mA	3000K	1855Lm
					4000K	1885Lm
	U100-00-04	22W	25W	700mA	3000K	3025Lm
					4000K	3075Lm
NEW CONSTRUCTION PLASTER FRAME L	U100-00-06	12W	14W	400mA	3000K	1855Lm
					4000K	1885Lm
	U100-00-08	22W	25W	700mA	3000K	3025Lm
					4000K	3075Lm

120/277 V | 50/60 Hz | Intertek

0-10V / TRIAC/ELV* | FAST | CONNEC | INCL

COLOR | W ☐ | Z ■ | MATERIAL | AL | PMMA | RAL ⓘ » 146

FINISHING SECTION TO BE USED WITH JOKERLIGHT REMODEL BOX OR NEW CONSTRUCTION PLASTER FRAME MOUNTING ACCESSORIES.
* TRIAC/ELV DIMMING ONLY AT 120Vac. | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
DRIVER: ERP-PSB SERIES OR SIMILAR



Peydro Herrero · Odontología Avanzada, Valencia (Spain) | Design: Francesc Rifé Studio | Photography: David Zarzoso · Fotografía de arquitectura


2018 WINNER
EUROPEAN
PRODUCT
DESIGN
AWARD

POP UP



		CCT	Beam	LOR
POP UP **UL**	**U278-21-10-** | **WT** | **NT** |	2700K	20º	92%
	U278-21-11- | **WT** | **NT** |	3000K	20º	92%
	U278-21-12- | **WT** | **NT** |	4000K	20º	92%
	U278-21-20- | **WT** | **NT** |	2700K	30º	89%
	U278-21-21- | **WT** | **NT** |	3000K	30º	89%
	U278-21-22- | **WT** | **NT** |	4000K	30º	89%
	U278-21-30- | **WT** | **NT** |	2700K	56º	86%
	U278-21-31- | **WT** | **NT** |	3000K	56º	86%
	U278-21-32- | **WT** | **NT** |	4000K	56º	86%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h | RATED | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | 355º | 90º | Ø 3.10 in (79 mm) | 20º / 30º / 56º



ACCESSORIES


NOT SOLD SEPARATELY

POP UP UL **Beam Mixer Diffuser**** **0805-01-00**



POP UP UL **Anti-glare Honeycomb Louver**** **0806-00-00** | **WT** | **NT** |





DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-35	4.5W	6W	500mA	2700K	461Lm	1 to 5
				3000K	483Lm	
				4000K	517Lm	


120-277 V | 50/60 Hz | Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	500-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

OPTIONAL MOUNTING ACCESSORY: NEW CONSTRUCTION PLASTERFRAME S

U100-01-19 *TO BE USED WITH REMOTE BOX

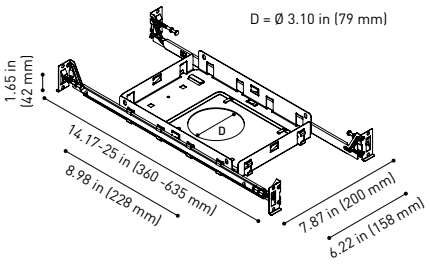

COLOR | WT ☐ | NT ■ | MATERIAL | AL | PC | RAL » 146

* DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT
** AFFECTS THE LIGHTING PARAMETERS



Photography: Jesús Granada · Fotografía de Arquitectura


TWIST




		CCT	Beam	LOR
TWIST UL	U204-12-10- | WT | NT |	2700K	19º	92%
	U204-12-11- | WT | NT |	3000K	19º	92%
	U204-12-12- | WT | NT |	4000K	19º	92%
	U204-12-20- | WT | NT |	2700K	40º	86%
	U204-12-21- | WT | NT |	3000K	40º	86%
	U204-12-22- | WT | NT |	4000K	40º	86%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

IC RATED | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | 355º | 35º | 4.7x4.7 in (119x119 mm) | 19º / 40º





DRIVER OPTIONS * REMOTE BOX-CASE S	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-20	8.4W	9.8W	250mA	2700K	1016Lm	1
				3000K	1057Lm	
				4000K	1073Lm	

120-277 V | 50/60 Hz | Intertek


RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	350mA	700mA
18	447 ft	224 ft
16	711 ft	356 ft
14	1132 ft	566 ft

OPTIONAL MOUNTING ACCESSORY: NEW CONSTRUCTION PLASTERFRAME L

U100-01-21 *TO BE USED WITH REMOTE BOX

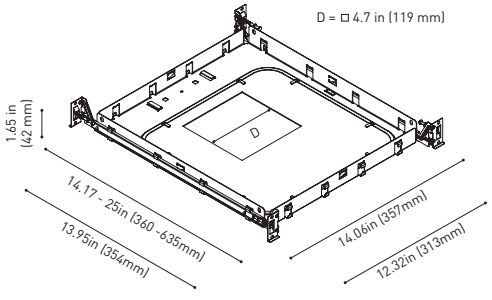

COLOR | WT □ | NT ■ | MATERIAL | AL | RAL » 146


*DRIVER: UNIVERSAL LIGHTING TECHNOLOGIES | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT




		CCT	Beam	LOR
TWIST Round UL	U215-12-10- | WT | NT |	2700K	19º	92%
	U215-12-11- | WT | NT |	3000K	19º	92%
	U215-12-12- | WT | NT |	4000K	19º	92%
	U215-12-20- | WT | NT |	2700K	40º	86%
	U215-12-21- | WT | NT |	3000K	40º	86%
	U215-12-22- | WT | NT |	4000K	40º	86%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

IC RATED | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | 175º | 35º | Ø 4.35 in (111 mm) | 19º / 40º

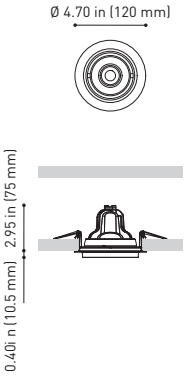



DRIVER OPTIONS * REMOTE BOX-CASE S	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-01-20	8.4W	9.8W	250mA	2700K	1016Lm	1
				3000K	1057Lm	
				4000K	1073Lm	

120-277 V | 50/60 Hz | Intertek


RESPECT THE DISTANCE LED-DRIVER RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	350mA	700mA
18	447 ft	224 ft
16	711 ft	356 ft
14	1132 ft	566 ft

OPTIONAL MOUNTING ACCESSORY: NEW CONSTRUCTION PLASTERFRAME L

U100-01-22 *TO BE USED WITH REMOTE BOX

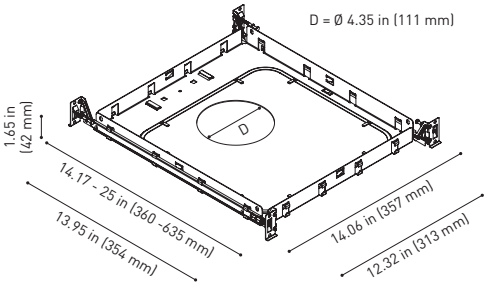


COLOR | WT □ | NT ■ | MATERIAL | AL | RAL » 146

*DRIVER: UNIVERSAL LIGHTING TECHNOLOGIES | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT



Photography: DoubleSpace Photography

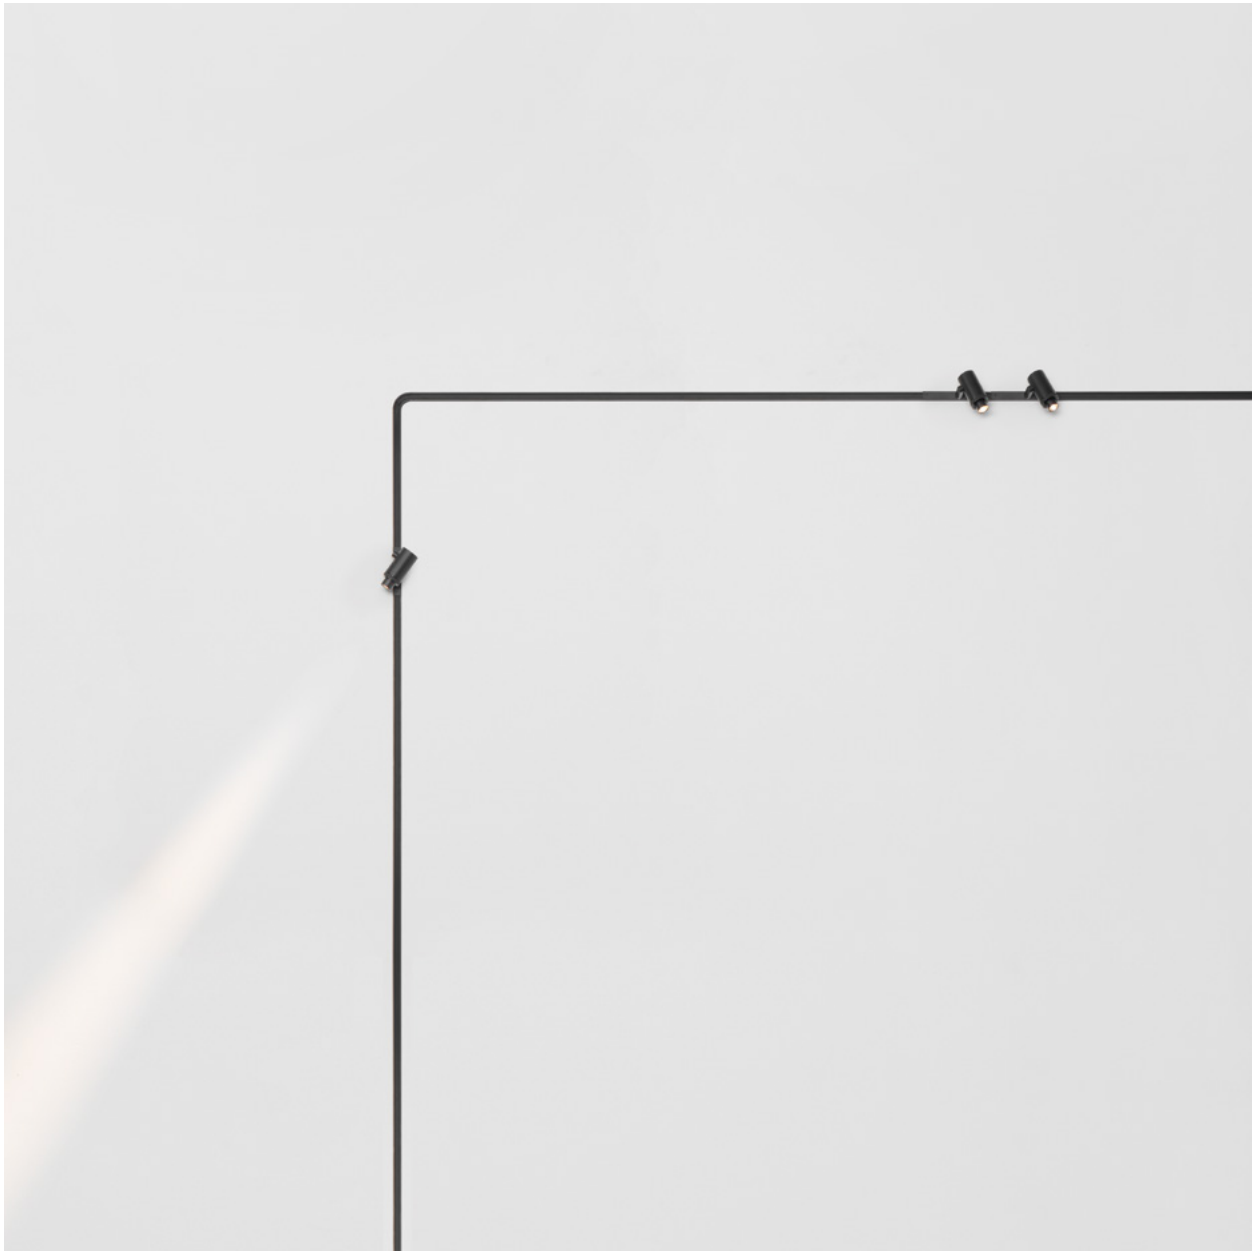

reddot winner 2020
innovative product

reddot winner 2020
lighting design

Bronze Delta
ADI Awards 2020

archiproducts
DESIGN AWARDS
—
WINNER 2020


2020 HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARD


INTERIOR DESIGN AWARDS
FX
INTERNATIONAL

INSTALLATION GUIDE
https://youtu.be/AqTlsTcSoGA

MINIMAL TRACK

MINIMAL TRACK






MINIMAL TRACK 24V Profile 2m UL — **U 384-02-00- | N |**

2 m = 78.74 in.





MINIMAL TRACK 24V Rubber Cable n x 1m UL — **U384-00-01- | N |**


n = Total Lenght of System.
1 m = 39.37 in.

24 V | Max. 4A

MINIMAL TRACK 24V Corner 90º 1 Plane UL

U384-00-02- | N |

Cable Lenght = 1.38 in (35 mm)



MINIMAL TRACK 24V End Cap UL


U384-00-05- | N |



MINIMAL TRACK 24V Corner 90º 1 Plane Rounded UL


U384-00-03- | N |

Cable Lenght = 1.38 in (35 mm)



MINIMAL TRACK 24V Connection Box UL


U384-00-06- | N |





MINIMAL TRACK 24V Corner 90º 2 Planes UL

U384-00-04- | N |

Cable Lenght = 3.94 in (100 mm)



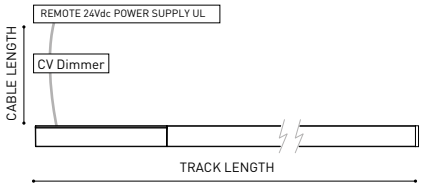


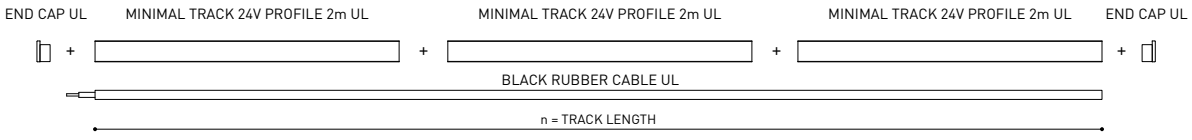


COLOUR | N ■ |


RAL ⓘ » 146

MINIMAL TRACK SUSPENSION









MINIMAL TRACK 24V Suspension UL

Profile 2m UL

U384-02-00- | N |


Profile 2m Initial feed kit UL

U400-02-10- | N |

Profile 2m Middle feed kit UL*

U400-02-20- | N |


* Unidirectional Middle Feed.
2m = 78.74in



MINIMAL TRACK 24V Suspension UL Corner 90º

U400-00-03- | N |

Cable Lenght = 3.35 in (85 mm)



MINIMAL TRACK 24V Suspension UL


Rubber Cable n x 1m UL U400-00-01- | N |

n = Total Lenght of System.
1 m = 39.37 in.

24 V | Max. 4A


MINIMAL TRACK 24V Suspension UL Straight Joiner

U400-00-02- | N |



MINIMAL TRACK 24V Suspension Kit UL

U400-02-04- | N |





MINIMAL TRACK 24V Suspension UL End Caps

U400-00-05- | N |

Two End Caps UL Included



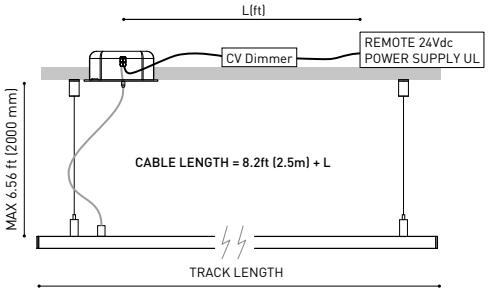

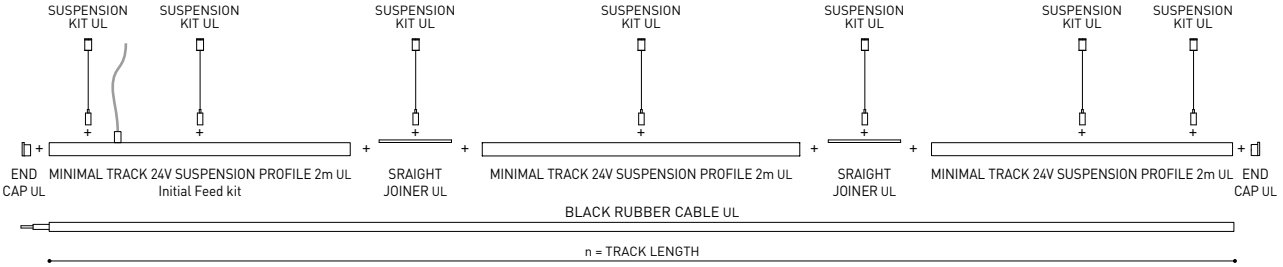


COLOUR | N ■ |

RAL ⓘ » 146

SURFACE & SUSPENSION


		P	V	D (A x B x C)
MINIMAL TRACK 24V **Remote Power Supply UL**	**U384-00-07**	100W	24V	8.16 x 2.97 x 1.30 in 207.2 x 75.4 x 33 mm


120 & 277 V | 50/60 Hz | NO DIM



		P	V	D (A x B x C)
MINIMAL TRACK 24V **Dimmable Power Supply UL***	**U010-00-01**	60W	24V	5.83 x 1.68 x 1 in 148.2 x 42.6 x 25.4 mm
	U010-00-02	100W	24V	9.5 x 1.57 x 1 in 241.3 x 39.9 x 25.4 mm


120 & 277 V | 50/60 Hz | 0-10 V





		P	V	D (A x B x C)
MINIMAL TRACK 24V **Constant Voltage Dimmer**	**U010-00-00**	144W	24V	2.86 x 1.18 x 0.71 in 72.6 x 30 x 18 mm

24 V | CASAMBI



UL DROP VOLTAGE TABLE

		CABLE LENGTH			
		<16.40 ft <5 m	<32.80 ft <10 m	<65.62 ft <20 m	<98.43 ft <30 m
POWER	**CABLE SECTION**	**TRACK LENGTH**			
60 W	AWG18	98.43 ft 30 m	98.43 ft 30 m	65.62 ft 20 m	32.80 ft 10 m
	AWG16	98.43 ft 30 m	98.43 ft 30 m	98.43 ft 30 m	65.62 ft 20 m
96 W	AWG18	65.62 ft 20 m	32.80 ft 10 m	X	X
	AWG16	65.62 ft 20 m	65.62 ft 20 m	32.80 ft 10 m	X


PHASE CUT AND DMX DIM OPTIONS PLEASE CONSLT | *POWER SUPPLY REQUIRES AN ENCLOSURE FOR INSTALLATION. ENCLOSURE NOT PROVIDED



		P	Psystem	CCT	I(led)	Flux	LOR
ALASKA **24V UL**	**U385-00-00-** | **N** |	3.5W	4W	2700K	400mA	390Lm	30%
	U385-00-01- | **N** |	3.5W	4W	3000K	400mA	410Lm	30%

24 V | Intertek | DRY LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2 | INCL | MINIMAL TRACK | 21°

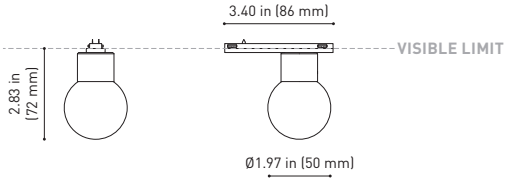

COLOR | N ■ | MATERIAL | AL | OPTICAL GLASS | RAL ⓘ » 146

OTHER CCT PLEASE CONSULT



Architecture: Rubén Muedra - Estudio de Arquitectura | Photography: Adrián Mora Maroto






			P	Psystem	CCT	BEAM	I(led)	Flux	LOR
SIX XS **24V UL**	**U389-00-10-** | **WT** | **NT** |		3.5W	4W	2700K	17°	400mA	400Lm	90%
	U389-00-11- | **WT** | **NT** |		3.5W	4W	3000K	17°	400mA	420Lm	90%
	U389-00-12- | **WT** | **NT** |		3.5W	4W	4000K	17°	400mA	450Lm	90%
	U389-00-20- | **WT** | **NT** |		3.5W	4W	2700K	23°	400mA	400Lm	86%
	U389-00-21- | **WT** | **NT** |		3.5W	4W	3000K	23°	400mA	420Lm	86%
	U389-00-22- | **WT** | **NT** |		3.5W	4W	4000K	23°	400mA	450Lm	86%
	U389-00-30- | **WT** | **NT** |		3.5W	4W	2700K	34°	400mA	400Lm	88%
	U389-00-31- | **WT** | **NT** |		3.5W	4W	3000K	34°	400mA	420Lm	88%
	U389-00-32- | **WT** | **NT** |		3.5W	4W	4000K	34°	400mA	450Lm	88%

24 V | Intertek | DRY LOCATION | CRI>90 | L80B10 >60.000 h

MacAdam Step 2 | INCL | MINIMAL TRACK | 355° | 310° | 17° / 23° / 34°

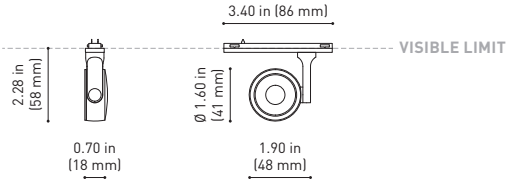

COLOR | WT □ | NT ■ | MATERIAL | AL | PC | RAL » 146


COLORS AFFECT THE LIGHTING PARAMETERS | OTHER CCT PLEASE CONSULT



				P	Psystem	CCT	BEAM	I(led)	Flux	LOR
PLUS Micro 24V UL	U388-00-00- | WT | NT |			4.7W	5W	2700K	10°-35°	400mA	500Lm	10-17%
	U388-00-01- | WT | NT |			4.7W	5W	3000K	10°-35°	400mA	520Lm	10-17%
	U388-00-02- | WT | NT |			4.7W	5W	4000K	10°-35°	400mA	570Lm	10-17%

24 V | Intertek | DRY LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 3 | INCL | MINIMAL TRACK | 355° | 180° | 10-35°

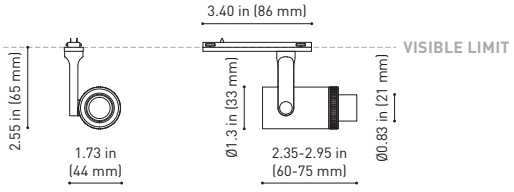

COLOR | WT □ | NT ■ | MATERIAL | AL | OPTICAL PMMA | RAL » 146

OTHER CCT PLEASE CONSULT







			P	Psystem	CCT	BEAM	I(led)	Flux	LOR
iO Micro 24V UL	U387-00-10- | WT | NT |		4.7W	5W	2700K	20°	400mA	500Lm	88%
	U387-00-11- | WT | NT |		4.7W	5W	3000K	20°	400mA	520Lm	88%
	U387-00-12- | WT | NT |		4.7W	5W	4000K	20°	400mA	570Lm	88%
	U387-00-20- | WT | NT |		4.7W	5W	2700K	40°	400mA	500Lm	86%
	U387-00-21- | WT | NT |		4.7W	5W	3000K	40°	400mA	520Lm	86%
	U387-00-22- | WT | NT |		4.7W	5W	4000K	40°	400mA	570Lm	86%
	U387-00-30- | WT | NT |		4.7W	5W	2700K	54°	400mA	500Lm	86%
	U387-00-31- | WT | NT |		4.7W	5W	3000K	54°	400mA	520Lm	86%
	U387-00-32- | WT | NT |		4.7W	5W	4000K	54°	400mA	570Lm	86%

24 V | Intertek | DRY LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 3 | INCL | MINIMAL TRACK | 355° | 155° | 20° / 40° / 54°

ACCESSORIES

NOT SOLD SEPARATELY

iO Micro 24V **Beam Mixer Diffuser***


A387-00-00



iO Micro 24V **Anti-glare Honeycomb Louver***

A387-00-01- | WT | NT |



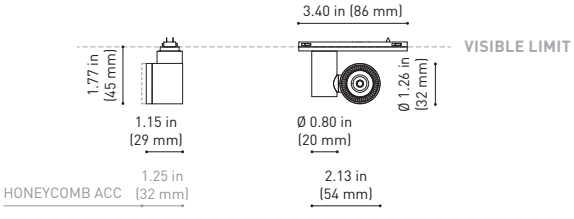

COLOR | WT □ | NT ■ | MATERIAL | AL | PC | RAL » 146


* ACCESORIES AFFECT THE LIGHTING PARAMETERS | OTHER CCT PLEASE CONSULT



			P	Psystem	CCT	BEAM	I(led)	Flux	LOR
FIT 20 **24V UL**	**U386-00-10-** | **WT** | **NT** | **G** |		2.1W	2.8W	2700K	12°	700mA	127Lm	87%
	U386-00-11- | **WT** | **NT** | **G** |		2.1W	2.8W	3000K	12°	700mA	150Lm	87%
	U386-00-20- | **WT** | **NT** | **G** |		2.1W	2.8W	2700K	30°	700mA	127Lm	88%
	U386-00-21- | **WT** | **NT** | **G** |		2.1W	2.8W	3000K	30°	700mA	150Lm	88%
	U386-00-30- | **WT** | **NT** | **G** |		2.1W	2.8W	2700K	54°	700mA	127Lm	81%
	U386-00-31- | **WT** | **NT** | **G** |		2.1W	2.8W	3000K	54°	700mA	150Lm	81%

24 V | Intertek | DRY LOCATION | CRI>90 | L80B10 >60.000 h

MacAdam Step 3 | INCL | MINIMAL TRACK | 355° | 90° | 12° / 30° / 54°

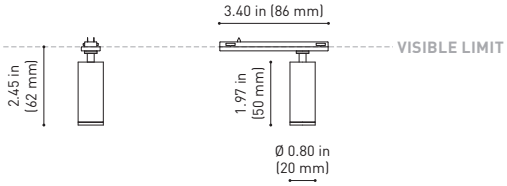

COLOR | WT □ | NT ■ | G ■ | MATERIAL | AL | PC | RAL ⓘ » 146

OTHER CCT PLEASE CONSULT





HOMES
FOR
OUR TIME



						P	Psystem	CCT	BEAM	I(led)	Flux	LOR
FIT 27 **24V UL**	**U399-00-10-**	**WT**	**NT**	**G**		4.5W	5W	2700K	22°	400mA	440Lm	84%
	U399-00-11-	**WT**	**NT**	**G**		4.5W	5W	3000K	22°	400mA	475Lm	84%
	U399-00-20-	**WT**	**NT**	**G**		4.5W	5W	2700K	37°	400mA	440Lm	82%
	U399-00-21-	**WT**	**NT**	**G**		4.5W	5W	3000K	37°	400mA	475Lm	82%
	U399-00-30-	**WT**	**NT**	**G**		4.5W	5W	2700K	46°	400mA	440Lm	81%
	U399-00-31-	**WT**	**NT**	**G**		4.5W	5W	3000K	46°	400mA	475Lm	81%

24 V | Intertek | DRY LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2 | INCL | MINIMAL TRACK | 355° | 90° | 22° / 37° / 46°

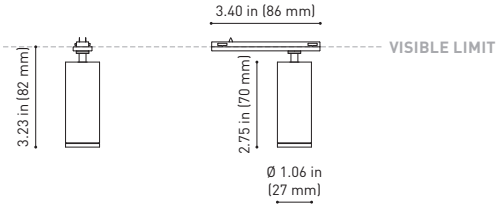

COLOR | WT □ | NT ■ | G ■ | MATERIAL | AL | PC | RAL ⓘ » 146


OTHER CCT PLEASE CONSULT



TOP Micro **24V UL**	**U383-00-10-** | **WT** | **NT** |	2.1W	2.8W	2700K	19°	700mA	190Lm	90%
	U383-00-11- | **WT** | **NT** |	2.1W	2.8W	3000K	19°	700mA	210Lm	90%
	U383-00-20- | **WT** | **NT** |	2.1W	2.8W	2700K	38°	700mA	190Lm	92%
	U383-00-21- | **WT** | **NT** |	2.1W	2.8W	3000K	38°	700mA	210Lm	92%


24 V | Intertek | DRY LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 3 | INCL | MINIMAL TRACK | 19° / 38°

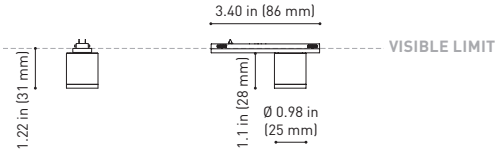

COLOR | WT □ | NT ■ | MATERIAL | AL | PC | RAL » 146

OTHER CCT PLEASE CONSULT

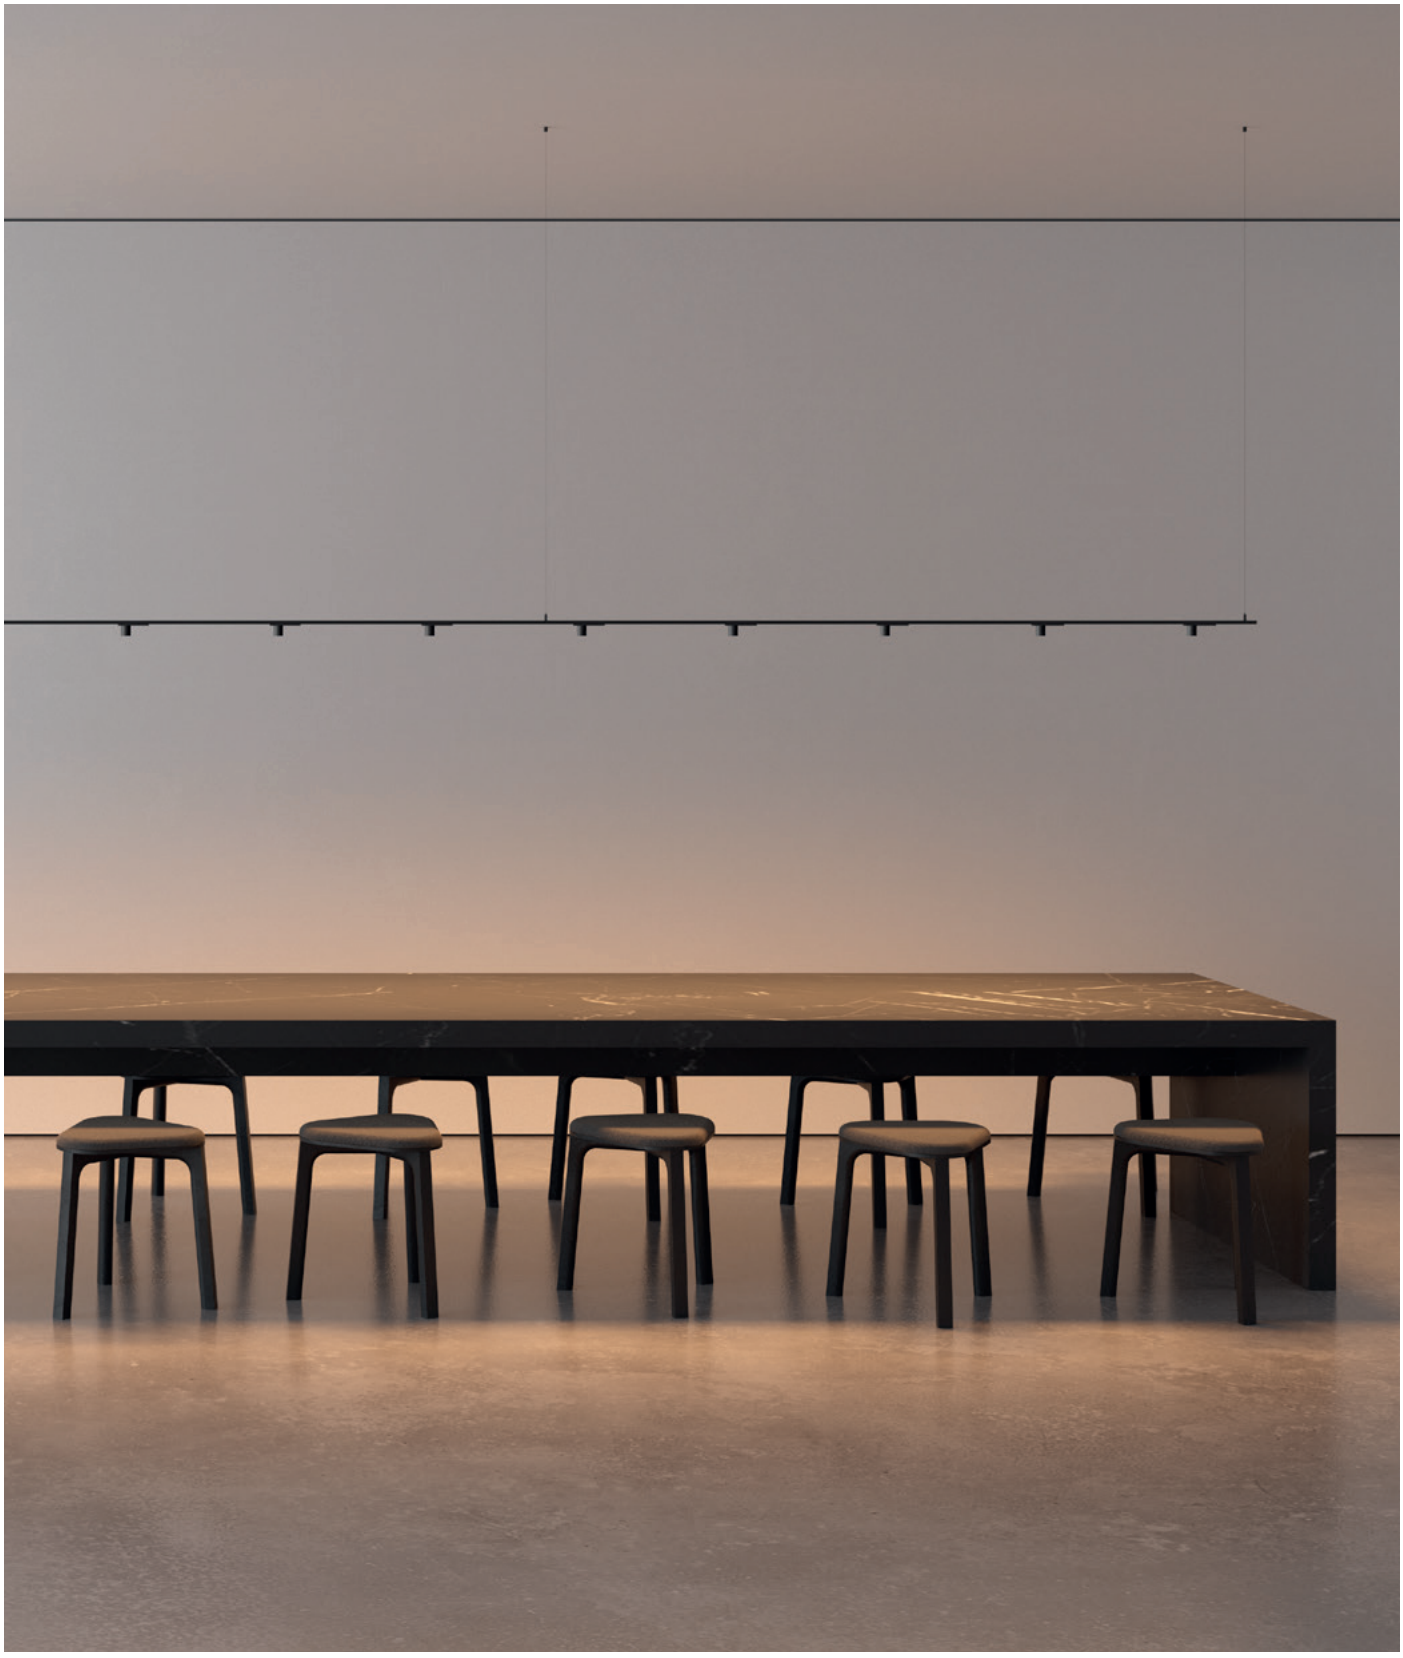






		P	Psystem	CCT	I	Flux	LOR
LINE Micro 250 **24V UL**	**U395-00-00- | N |**	2W	2.7W	2700K	400mA	330Lm	52%
	U395-00-01- | N |	2W	2.7W	3000K	400mA	340Lm	52%
LINE Micro 500 **24V UL**	**U395-10-00- | N |**	5W	5.5W	2700K	400mA	820Lm	52%
	U395-10-01- | N |	5W	5.5W	3000K	400mA	840Lm	52%
LINE Micro 1000 **24V UL**	**U395-20-00- | N |**	9W	9.2W	2700K	700mA	1430Lm	52%
	U395-20-01- | N |	9W	9.2W	3000K	700mA	1500Lm	52%


24 V | Intertek | DRY LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2 | INCL | MINIMAL TRACK | 113°


LINE MICRO 250 24V UL



LINE MICRO 500 24V UL




LINE MICRO 1000 24V UL




COLOR | N ■ | MATERIAL | AL | PC | RAL ⓘ » 146

OTHER CCT PLEASE CONSULT



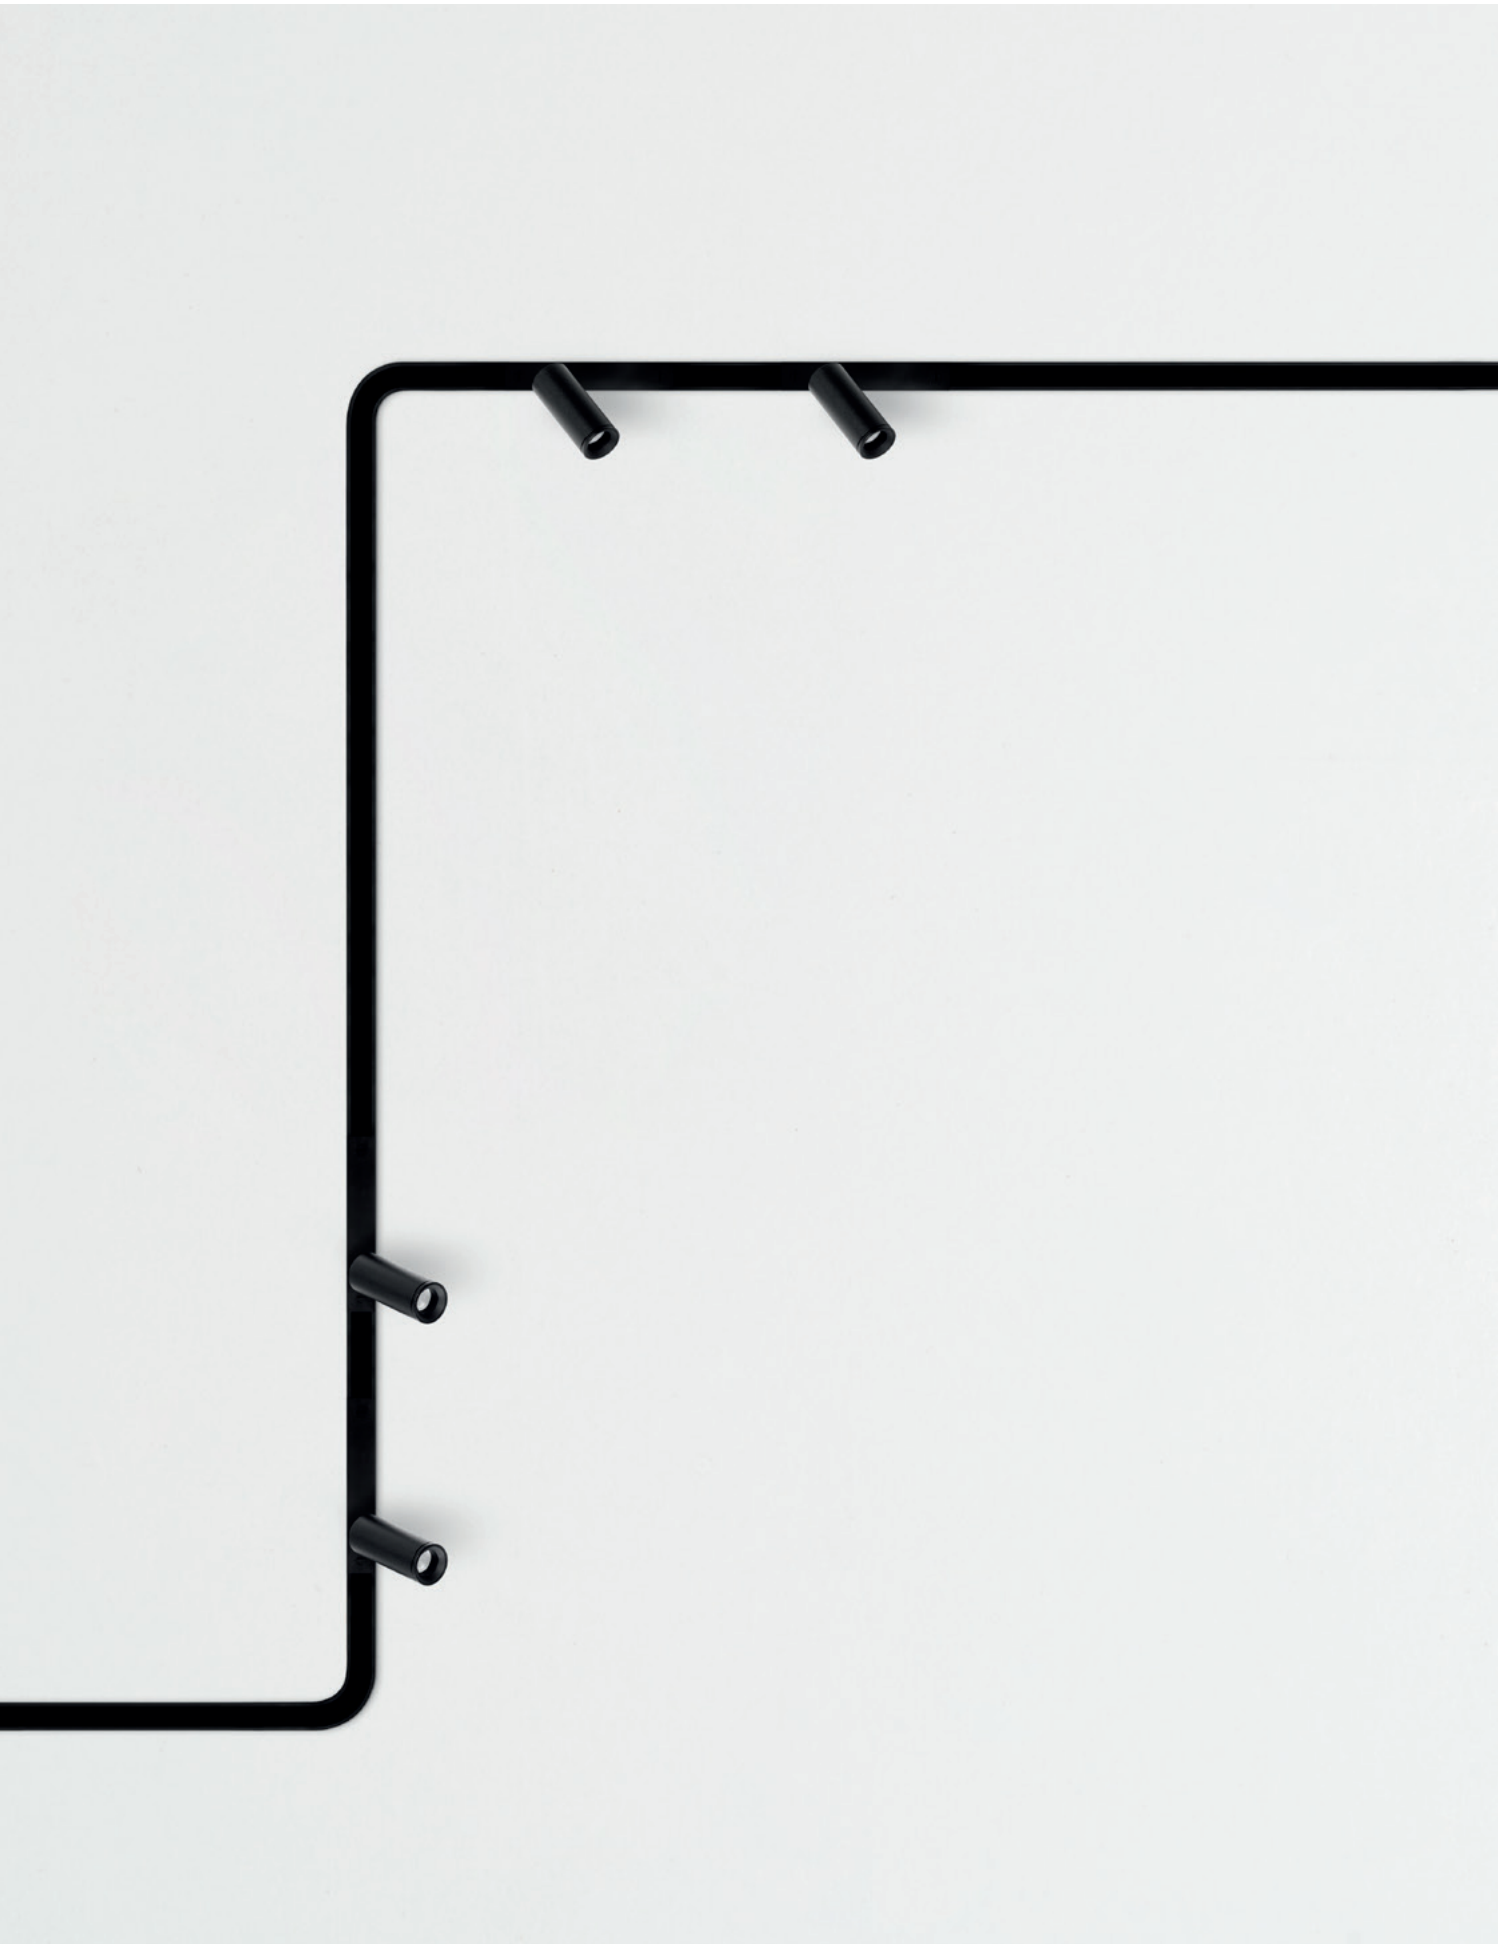

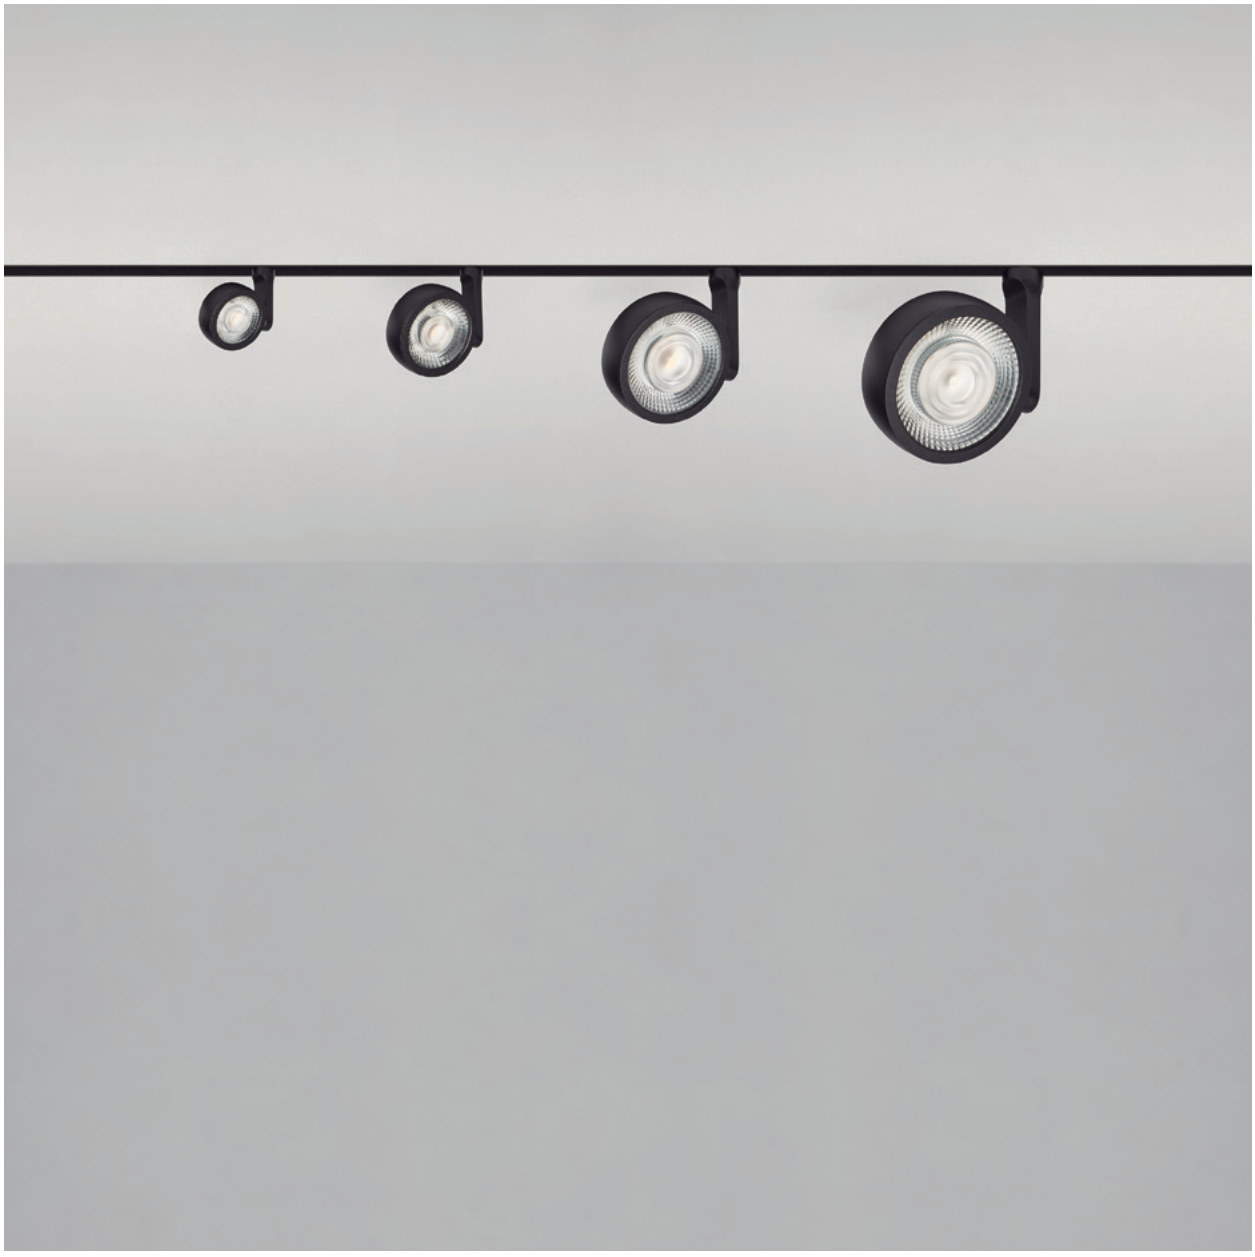

GOOD DESIGN

GERMAN DESIGN AWARD WINNER 2019

SIX 48V



SIX L 48V UL	+RE	P	Psystem	CCT	Beam	I(led)	Flux	LOR
U329-0- ⓪ -10- | WT | NT | WTW | NTW	-S	24.5W	27W	2700K	17°	700mA	2850Lm	93%
U329-0- ⓪ -11- | WT | NT | WTW | NTW	-S	24.5W	27W	3000K	17°	700mA	2950Lm	93%
U329-0- ⓪ -12- | WT | NT | WTW | NTW	-S	24.5W	27W	4000K	17°	700mA	3000Lm	93%
U329-0- ⓪ -30- | WT | NT | WTW | NTW	-S	24.5W	27W	2700K	26°	700mA	2850Lm	93%
U329-0- ⓪ -31- | WT | NT | WTW | NTW	-S	24.5W	27W	3000K	26°	700mA	2950Lm	93%
U329-0- ⓪ -32- | WT | NT | WTW | NTW	-S	24.5W	27W	4000K	26°	700mA	3000Lm	93%
U329-0- ⓪ -20- | WT | NT | WTW | NTW	-S	24.5W	27W	2700K	34°	700mA	2850Lm	90%
U329-0- ⓪ -21- | WT | NT | WTW | NTW	-S	24.5W	27W	3000K	34°	700mA	2950Lm	90%
U329-0- ⓪ -22- | WT | NT | WTW | NTW	-S	24.5W	27W	4000K	34°	700mA	3000Lm	90%

48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 360° | 310° | 17° / 26° / 34°



SIX M 48V UL	+RE	P	Psystem	CCT	Beam	I(led)	Flux	LOR
U330-0- ⓪ -10- | WT | NT | WTW | NTW	-S	17W	18W	2700K	19°	500mA	2050Lm	93%
U330-0- ⓪ -11- | WT | NT | WTW | NTW	-S	17W	18W	3000K	19°	500mA	2130Lm	93%
U330-0- ⓪ -12- | WT | NT | WTW | NTW	-S	17W	18W	4000K	19°	500mA	2160Lm	93%
U330-0- ⓪ -20- | WT | NT | WTW | NTW	-S	17W	18W	2700K	28°	500mA	2050Lm	91%
U330-0- ⓪ -21- | WT | NT | WTW | NTW	-S	17W	18W	3000K	28°	500mA	2130Lm	91%
U330-0- ⓪ -22- | WT | NT | WTW | NTW	-S	17W	18W	4000K	28°	500mA	2160Lm	91%
U330-0- ⓪ -30- | WT | NT | WTW | NTW	-S	17W	18W	2700K	38°	500mA	2050Lm	93%
U330-0- ⓪ -31- | WT | NT | WTW | NTW	-S	17W	18W	3000K	38°	500mA	2130Lm	93%
U330-0- ⓪ -32- | WT | NT | WTW | NTW	-S	17W	18W	4000K	38°	500mA	2160Lm	93%


48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 360° | 310° | 19° / 28° / 38°


⓪	OPTIONS*
1	DIM 0-10 V
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	**U3290110WT**
-S	Track 48V Short	**U3290110WT-S**


SIX L 48V UL




SIX L 48V- SHORT UL

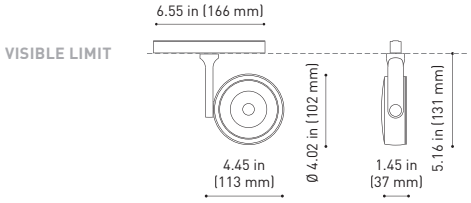

SIX M 48V UL




SIX M 48V- SHORT UL

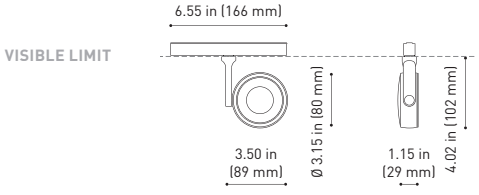

FINISHING	Lamp	Adaptor
WT	WT □	N ■
NT	NT ■	N ■
WTW	WT □	W □
NTW	NT ■	W □

COLOR | WT □ | NT ■ | MATERIAL | AL | PC | RAL ⓘ » 146

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "**-S**" AT THE END OF THE SALES REFERENCE (AFTER FINISHING)
COLORS AFFECT THE LIGHTING PARAMETERS | OTHER CCT PLEASE CONSULT

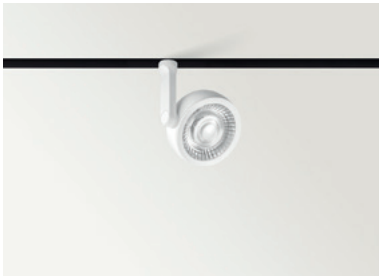

SIX S 48V UL	+RE	P	Psystem	CCT	Beam	I(led)	Flux	LOR
U333-0- ⓓ -10- | WT | NT | WTW | NTW	-S	8.5W	9W	2700K	17º	500mA	1030Lm	86%
U333-0- ⓓ -11- | WT | NT | WTW | NTW	-S	8.5W	9W	3000K	17º	500mA	1070Lm	86%
U333-0- ⓓ -12- | WT | NT | WTW | NTW	-S	8.5W	9W	4000K	17º	500mA	1100Lm	86%
U333-0- ⓓ -20- | WT | NT | WTW | NTW	-S	8.5W	9W	2700K	24º	500mA	1030Lm	84%
U333-0- ⓓ -21- | WT | NT | WTW | NTW	-S	8.5W	9W	3000K	24º	500mA	1070Lm	84%
U333-0- ⓓ -22- | WT | NT | WTW | NTW	-S	8.5W	9W	4000K	24º	500mA	1100Lm	84%
U333-0- ⓓ -30- | WT | NT | WTW | NTW	-S	8.5W	9W	2700K	34º	500mA	1030Lm	89%
U333-0- ⓓ -31- | WT | NT | WTW | NTW	-S	8.5W	9W	3000K	34º	500mA	1070Lm	89%
U333-0- ⓓ -32- | WT | NT | WTW | NTW	-S	8.5W	9W	4000K	34º	500mA	1100Lm	89%

48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 360º | 310º | 17º / 24º / 34º



SIX XS 48V UL	+RE	P	Psystem	CCT	Beam	I(led)	Flux	LOR
U335-0- ⓓ -10- | WT | NT | WTW | NTW	-S	4.5W	5W	2700K	17º	500mA	470Lm	90%
U335-0- ⓓ -11- | WT | NT | WTW | NTW	-S	4.5W	5W	3000K	17º	500mA	500Lm	90%
U335-0- ⓓ -12- | WT | NT | WTW | NTW	-S	4.5W	5W	4000K	17º	500mA	530Lm	90%
U335-0- ⓓ -20- | WT | NT | WTW | NTW	-S	4.5W	5W	2700K	23º	500mA	470Lm	86%
U335-0- ⓓ -21- | WT | NT | WTW | NTW	-S	4.5W	5W	3000K	23º	500mA	500Lm	86%
U335-0- ⓓ -22- | WT | NT | WTW | NTW	-S	4.5W	5W	4000K	23º	500mA	530Lm	86%
U335-0- ⓓ -30- | WT | NT | WTW | NTW	-S	4.5W	5W	2700K	34º	500mA	470Lm	88%
U335-0- ⓓ -31- | WT | NT | WTW | NTW	-S	4.5W	5W	3000K	34º	500mA	500Lm	88%
U335-0- ⓓ -32- | WT | NT | WTW | NTW	-S	4.5W	5W	4000K	34º	500mA	530Lm	88%


48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 360º | 310º | 17º / 23º / 34º


ⓓ	OPTIONS*
1	DIM 0-10 V
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	**U3330110WT**
-S	Track 48V Short	**U3330110WT-S**


SIX S 48V UL




SIX S 48V- SHORT UL

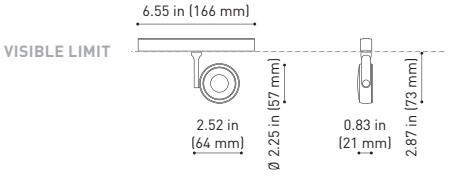

SIX XS 48V UL



SIX XS 48V- SHORT UL

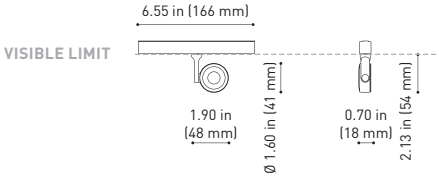

FINISHING	Lamp	Adaptor
WT	WT ☐	N ■
NT	NT ■	N ■
WTW	WT ☐	W ☐
NTW	NT ■	W ☐

COLOR | WT ☐ | NT ■ | MATERIAL | AL | PC | RAL ⓘ » 146

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "**-S**" AT THE END OF THE SALES REFERENCE (AFTER FINISHING)
COLORS AFFECT THE LIGHTING PARAMETERS | OTHER CCT PLEASE CONSULT





Kekomo. Elda (Spain) | Design: Pablo Muñoz Payá Arquitectos | Photography: Jesús Granada - Fotografía de Arquitectura

FIT 48V



FIT 50 48V UL	+RE	P	Psystem	CCT	Beam	I(led)	Flux	LOR
U346-0- ⓪ -10- | WT | NT | G | WTW | NTW | GW |	-S	12W	13W	2700K	15°	1000mA	1040Lm	85%
U346-0- ⓪ -11- | WT | NT | G | WTW | NTW | GW |	-S	12W	13W	3000K	15°	1000mA	1040Lm	85%
U346-0- ⓪ -20- | WT | NT | G | WTW | NTW | GW |	-S	12W	13W	2700K	28°	1000mA	1040Lm	82%
U346-0- ⓪ -21- | WT | NT | G | WTW | NTW | GW |	-S	12W	13W	3000K	28°	1000mA	1120Lm	82%
U346-0- ⓪ -30- | WT | NT | G | WTW | NTW | GW |	-S	12W	13W	2700K	47°	1000mA	1040Lm	80%
U346-0- ⓪ -31- | WT | NT | G | WTW | NTW | GW |	-S	12W	13W	3000K	47°	1000mA	1120Lm	80%

48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h

MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 360° | 90° | 15°/28°/47°

⓪	OPTIONS*
1	DIM 0-10 V
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	**U3460110WT**
-S	Track 48V Short	**U3460110WT-S**

FINISHING	Lamp	Adaptor
WT	WT ☐	N ■
NT	NT ■	N ■
G	G ■	N ■
WTW	WT ☐	W ☐
NTW	NT ■	W ☐
GW	G ■	W ☐

ACCESSORY


FIT 50 UL **Anti-glare Honeycomb Louver ****

A346-00-00


NOT SOLD SEPARATELY



FIT 50 48V UL

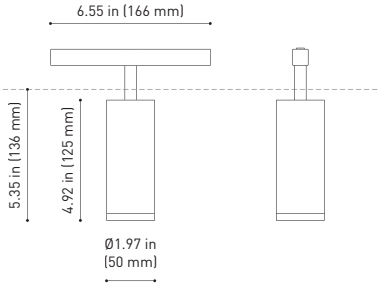

FIT 50 48V- SHORT UL

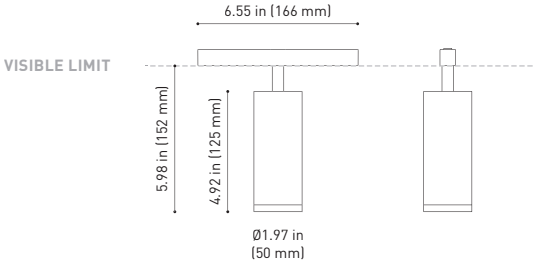

COLOR | WT ☐ | NT ■ | G ■ | MATERIAL | AL | PC | RAL ⓘ » 146

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "**-S**" AT THE END OF THE SALES REFERENCE (AFTER FINISHING)
** ACCESSORY AFFECTS THE LIGHTING PARAMETERS | OTHER CCT PLEASE CONSULT



FIT 35 48V UL	+RE	P	Psystem	CCT	Beam	I(led)	Flux	LOR
U345-0- ⓪ -10- | WT | NT | G | WTW | NTW | GW |	-S	5.5W	6W	2700K	19°	500mA	590Lm	82%
U345-0- ⓪ -11- | WT | NT | G | WTW | NTW | GW |	-S	5.5W	6W	3000K	19°	500mA	630Lm	82%
U345-0- ⓪ -20- | WT | NT | G | WTW | NTW | GW |	-S	5.5W	6W	2700K	29°	500mA	590Lm	80%
U345-0- ⓪ -21- | WT | NT | G | WTW | NTW | GW |	-S	5.5W	6W	3000K	29°	500mA	630Lm	80%
U345-0- ⓪ -30- | WT | NT | G | WTW | NTW | GW |	-S	5.5W	6W	2700K	38°	500mA	590Lm	80%
U345-0- ⓪ -31- | WT | NT | G | WTW | NTW | GW |	-S	5.5W	6W	3000K	38°	500mA	630Lm	80%

48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 360° | 90° | 19°/29°/38°



FIT 20 48V UL	+RE	P	Psystem	CCT	Beam	I(led)	Flux	LOR
U344-0- ⓪ -10- | WT | NT | G | WTW | NTW | GW |	-S	2.1W	3W	2700K	12°	700mA	127Lm	87%
U344-0- ⓪ -11- | WT | NT | G | WTW | NTW | GW |	-S	2.1W	3W	3000K	12°	700mA	150Lm	87%
U344-0- ⓪ -20- | WT | NT | G | WTW | NTW | GW |	-S	2.1W	3W	2700K	30°	700mA	127Lm	88%
U344-0- ⓪ -21- | WT | NT | G | WTW | NTW | GW |	-S	2.1W	3W	3000K	30°	700mA	150Lm	88%
U344-0- ⓪ -30- | WT | NT | G | WTW | NTW | GW |	-S	2.1W	3W	2700K	54°	700mA	127Lm	81%
U344-0- ⓪ -31- | WT | NT | G | WTW | NTW | GW |	-S	2.1W	3W	3000K	54°	700mA	150Lm	81%

48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 3 | OPTIONS* | INCL | TRACK 48V | 360° | 90° | 12°/30°/54°

ACCESSORY

FIT 35 UL **Anti-glare Honeycomb Louver ****

A345-00-00


NOT SOLD SEPARATELY




⓪	OPTIONS*
1	DIM 0-10 V
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	**U3450110WT**
-S	Track 48V Short	**U3450110WT-S**


FIT 35 48V UL




FIT 35 48V- SHORT UL

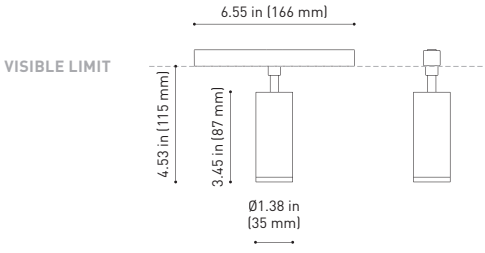

FIT 20 48V UL



FIT 20 48V- SHORT UL

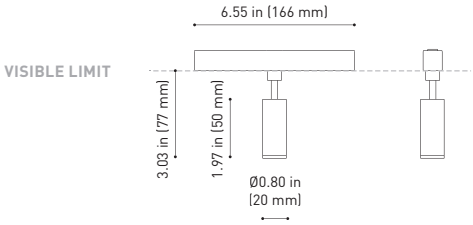

FINISHING	Lamp	Adaptor
WT	WT ☐	N ■
NT	NT ■	N ■
G	G ■	N ■
WTW	WT ☐	W ☐
NTW	NT ■	W ☐
GW	G ■	W ☐

COLOR | WT ☐ | NT ■ | G ■ | MATERIAL | AL | PC | RAL ⓘ » 146

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "**-S**" AT THE END OF THE SALES REFERENCE (AFTER FINISHING)

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS | OTHER CCT PLEASE CONSULT



Azora Offices Architecture: Francesc Rifé · Photography: David Zarzoso



Photography: Jesús Granada · Fotografía de arquitectura

SHORTLIST 2019

PREMIO ADCV 2019 ORO

PLUS 48V



PLUS 48V UL	+RE	P	Psystem	CCT	Beam	I(led)	Flux	LOR
U323-00- ◎◎ -0- | WT | NT | WTW | NTW |	-S	18W	20W	2700K	12º-51º	500mA	1920Lm	26-40%
U323-00- ◎◎ -1- | WT | NT | WTW | NTW |	-S	18W	20W	3000K	12º-51º	500mA	2000Lm	26-40%
U323-00- ◎◎ -2- | WT | NT | WTW | NTW |	-S	18W	20W	4000K	12º-51º	500mA	2030Lm	26-40%

48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h

MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 360º | 180º | 12º-51º | 12º-51º



PLUS Mini 48V UL	+RE	P	Psystem	CCT	Beam	I(led)	Flux	LOR
U326-00- ◎◎ -0- | WT | NT | WTW | NTW |	-S	6.5W	7W	2700K	10º-41º	700mA	630Lm	20-40%
U326-00- ◎◎ -1- | WT | NT | WTW | NTW |	-S	6.5W	7W	3000K	10º-41º	700mA	660Lm	20-40%
U326-00- ◎◎ -2- | WT | NT | WTW | NTW |	-S	6.5W	7W	4000K	10º-41º	700mA	680Lm	20-40%

48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h


MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 360º | 180º | 10º-41º | 10º-41º

◎◎	OPTIONS*
1	DIM 0-10 V
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	U3230010WT
-S	Track 48V Short	U3230010WT-S


FINISHING	Lamp	Adaptor
WT	WT ☐	N ■
NT	NT ■	N ■
WTW	WT ☐	W ☐
NTW	NT ■	W ☐

PLUS 48V UL

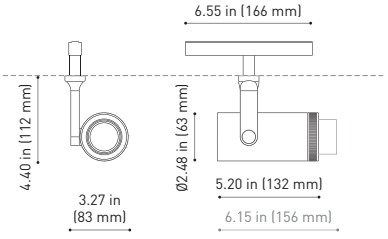


VISIBLE LIMIT

PLUS 48V- SHORT UL

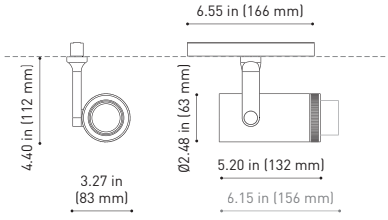


PLUS MINI 48V UL

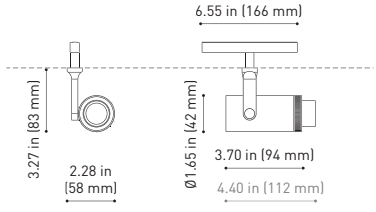

VISIBLE LIMIT

PLUS MINI 48V- SHORT UL

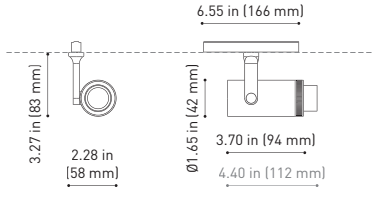

COLOR | WT ☐ | NT ■ | MATERIAL | AL | OPTICAL GLASS || OPTICAL PMMA | RAL » 146

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "**-S**" AT THE END OF THE SALES REFERENCE (AFTER FINISHING)
COLORS AFFECT THE LIGHTING PARAMETERS | OTHER CCT PLEASE CONSULT



Casa Cruz | Design: Rubén Muedra Estudio de Arquitectura | Photography: Adrián Mora Maroto

GOOD DESIGN

DESIGN AWARD 2017

PREMIO ADCV 2017 ORO

Silver Delta ADI Awards 2016

iO 48V



iO 48V UL	+RE	P	Psystem	CCT	Beam	I(led)	Flux	LOR
U348-0- ⓪ -10-	WT | NT | WTW | NTW | -S	4.5W	5W	2700K	20º	500mA	485Lm	92%
U348-0- ⓪ -11-	WT | NT | WTW | NTW | -S	4.5W	5W	3000K	20º	500mA	505Lm	92%
U348-0- ⓪ -20-	WT | NT | WTW | NTW | -S	4.5W	5W	2700K	30º	500mA	485Lm	89%
U348-0- ⓪ -21-	WT | NT | WTW | NTW | -S	4.5W	5W	3000K	30º	500mA	505Lm	89%
U348-0- ⓪ -30-	WT | NT | WTW | NTW | -S	4.5W	5W	2700K	56º	500mA	485Lm	86%
U348-0- ⓪ -31-	WT | NT | WTW | NTW | -S	4.5W	5W	3000K	56º	500mA	505Lm	86%

48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h

MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 355º | 325º | 20º / 30º / 56º

⓪	OPTIONS*
1	DIM 0-10 V
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	U3480110WT
-S	Track 48V Short	U3480110WT-S

FINISHING	Lamp	Adaptor
WT	WT ☐	N ■
NT	NT ■	N ■
WTW	WT ☐	W ☐
NTW	NT ■	W ☐

ACCESSORIES

AFFECTS THE LIGHTING PARAMETERS | NOT SOLD SEPARATELY


iO UL Beam Mixer Diffuser 0805-01-00




iO UL Anti-glare Honeycomb Louver 0806-00-00 | WT | NT |



iO 48V UL



iO 48V- SHORT UL

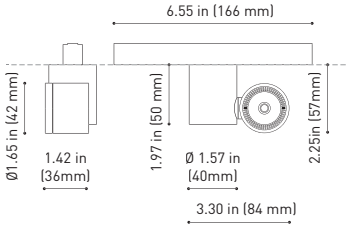

COLOR | WT ☐ | NT ■ | MATERIAL | AL | PC | RAL ⓘ » 146

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "**-S**" AT THE END OF THE SALES REFERENCE (AFTER FINISHING)
OTHER CCT PLEASE CONSULT



LINE 48V




		P	Psystem	CCT	I(led)	Flux	LOR
LINE **500 48V UL**	**U376-10-** ⓓ **-0- | N | WT |**	10.5W	11.5W	2700K	350mA	1480Lm	65%
	U376-10- ⓓ **-1- | N | WT |**	10.5W	11.5W	3000K	350mA	1600Lm	65%
LINE **1000 48V UL**	**U376-20-** ⓓ **-0- | N | WT |**	21W	23W	2700K	700mA	2960Lm	65%
	U376-20- ⓓ **-1- | N | WT |**	21W	23W	3000K	700mA	3200Lm	65%
LINE **2000 48V UL**	**U376-30-** ⓓ **-0- | N | WT |**	42W	46W	2700K	700mA	5920Lm	65%
	U376-30- ⓓ **-1- | N | WT |**	42W	46W	3000K	700mA	6400Lm	65%

48 V | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2 | OPTIONS* | INCL | TRACK 48V | 98° | 98°


ⓓ	OPTIONS*
1	DIM 0-10 V
2	DIM DALI

LINE 500 48V UL




TRACK 48V SHORT VISIBLE LIMIT
TRACK 48V VISIBLE LIMIT

LINE 1000 48V UL

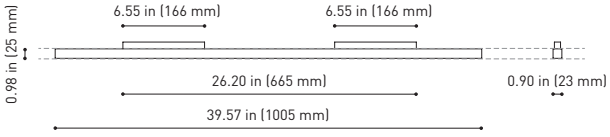

TRACK 48V SHORT VISIBLE LIMIT
TRACK 48V VISIBLE LIMIT

LINE 2000 48V UL

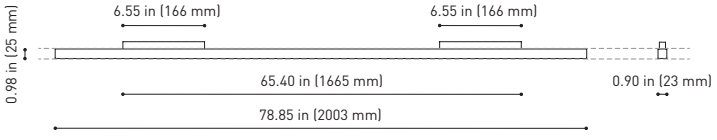



TRACK 48V SHORT VISIBLE LIMIT
TRACK 48V VISIBLE LIMIT

COLOR | N ■ | WT □ | MATERIAL | AL | PC | RAL ⓘ » 146

OTHER CCT PLEASE CONSULT | COLORS MAY AFFECT THE LIGHTING PARAMETERS

TRACK 48V UL






TRACK 48V TRIMLESS UL

TRACK 48V TRIMLESS 3.28 ft (1m) UL	U338-01-00- | N | WT |
TRACK 48V TRIMLESS 6.56 ft (2m) UL	U338-02-00- | N | WT |
TRACK 48V TRIMLESS 9.84 ft (3m) UL	U338-03-00- | N | WT |
TRACK 48V TRIMLESS Corner 90° One Plane	U338-06-00- | N | WT |
TRACK 48V TRIMLESS Corner 90° Two Planes	U338-07-00- | N | WT |


PLASTERBOARD CEILING, MANDATORY THICKNESS 0.5 in (12.5 mm).
RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING.

TRACK 48V TRIMLESS
Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS
Corner 90° Two Planes



*Electrical connection not included






TRACK 48V SURFACE UL


TRACK 48V SURFACE 3.28 ft (1m) UL	U338-11-00- | NT | WT |
TRACK 48V SURFACE 6.56 ft (2m) UL	U338-12-00- | NT | WT |
TRACK 48V SURFACE 9.84 ft (3m) UL	U338-13-00- | NT | WT |
TRACK 48V SURFACE Corner 90° One Plane	U338-14-00- | NT | WT |

TRACK 48V SURFACE
Corner 90° One Plane



*Electrical connection not included






TRACK 48V SURFACE SHORT UL

TRACK 48V SURFACE SHORT 3.28 ft (1m) UL	U338-21-00- | NT | WT |
TRACK 48V SURFACE SHORT 6.56 ft (2m) UL	U338-22-00- | NT | WT |
TRACK 48V SURFACE SHORT 9.84 ft (3m) UL	U338-23-00- | NT | WT |
TRACK 48V SURFACE SHORT Corner 90° One Plane	U338-24-00- | NT | WT |

TRACK 48V SURFACE SHORT
Corner 90° One Plane




*Electrical connection not included

COLOR | N ■ | NT ■ | WT □ |

RAL ⓘ » 092

TRIMLESS INSTALLATION GUIDE
https://youtu.be/SVWNEfbIfVY



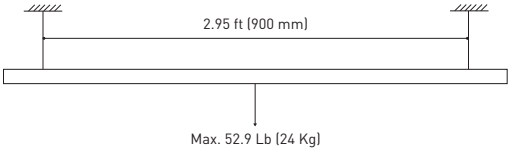

		P	V	D
CONSTANT VOLTAGE LED POWER SUPPLY	U100-00-78	96W	48V	8.16 x 2.97 x 1.30 in 207 x 75.4 x 33mm


120 & 277 V | 50/60 Hz

UL DROP VOLTAGE TABLE

		CABLE LENGHT			
		16.40 ft 5 m	32.80 ft 10 m	65.62 ft 20 m	98.43 ft 30 m
POWER	CABLE SECTION	TRACK LENGHT			
96 W	AWG16	164 ft 50 m	164 ft 50 m	131.32 ft 40 m	82 ft 25 m


TRACK 48V UL

ALL 48V TRACKS UL




TRACK 48V Live-End Connector UL

U338-00-01- | N | W |




TRACK 48V Central Connector UL

U338-00-02- | N | W |




TRACK 48V Corner Connector UL

U338-00-12- | N | W |



TRACK 48V Wireless Control UL

U434-01-31- | N | W | Casambi/AAG Stucchi App



TRACK 48V
Corner 90° Connector One Plane UL

U338-00-24- | N | W |

*Not suitable for trimless version

TRIMLESS 48V UL



TRACK 48V TRIMLESS Short T-Bracket UL


U338-00-03



TRACK 48V TRIMLESS Clamp for M6 ROD UL

U338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket UL


U338-00-04



TRACK 48V TRIMLESS Track Clamp UL


U338-00-10

*See accessories quantities



TRACK 48V TRIMLESS
Straight Joiners (2 units) UL


U338-00-05- | N |



TRACK 48V TRIMLESS Suspension Kit UL

U338-00-08

*See accessories quantities



TRACK 48V TRIMLESS
Plaster Installation Guard 3,28 ft (1m) UL

U338-00-21


*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**
3.28 ft (1000 mm) - 2 Pcs.
6.56 ft (2000 mm) - 3 Pcs.
9.84 ft (3000 mm) - 4 Pcs.

COLOR | N ■ | W □ | WT □ |

RAL ⓘ » 146

TRACK 48V UL

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V UL



TRACK 48V SURFACE Straight Joiner UL

U338-00-11

TRIMLESS, SURFACE & SUSPENSION 48V UL



TRACK 48V TRIMLESS & SURFACE End UL

U338-00-06- | NT | WT |



TRACK 48V TRIMLESS & SURFACE End Feed UL

U338-00-07- | NT | WT |

SURFACE SHORT & SUSPENSION SHORT 48V UL



TRACK 48V SURFACE SHORT End UL


U338-00-18- | NT | WT |



TRACK 48V SURFACE SHORT End Feed UL

U338-00-19- | NT | WT |

SUSPENSION & SUSPENSION SHORT 48V UL



TRACK 48V SURFACE Suspension Kit (2 units) UL

U338-00-15- | NT | WT |



TRACK 48V SURFACE Suspension Feed Kit UL

U338-00-17- | N | W | DIM

*For remote power supply

COLOR | N ■ | W □ | NT ■ | WT □ |

RAL ⓘ » 146



DESIGN AWARD 2019

BESTofyear HONOREE 2019 INTERIOR DESIGN

THE INVISIBLE BLACK

BLACK FOSTER SURFACE



		P	Psystem	CCT	I(led)	Flux
BLACK FOSTER Surface 5 UL	U320-4- ◎ -10- | WT | NT | WTMG | NTMG |	10.5W	13W	2700K	700mA	950Lm
	U320-4- ◎ -11- | WT | NT | WTMG | NTMG |	10.5W	13W	3000K	700mA	1050Lm
	U320-4- ◎ -12- | WT | NT | WTMG | NTMG |	10.5W	13W	4000K	700mA	1250Lm

120-277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

Junction Box Cover INCL Ø 4.33 in (110 mm) | MacAdam Step 3 | 0-10V TRIAC * | INCL** | UGR <19 | 38°



		P	Psystem	CCT	I(led)	Flux
BLACK FOSTER Surface 10 UL	U320-5- ◎ -10- | WT | NT | WTMG | NTMG |	21W	24W	2700K	700mA	1900Lm
	U320-5- ◎ -11- | WT | NT | WTMG | NTMG |	21W	24W	3000K	700mA	2100Lm
	U320-5- ◎ -12- | WT | NT | WTMG | NTMG |	21W	24W	4000K	700mA	2500Lm

120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

Junction Box Cover INCL Ø 4.33 in (110 mm) | MacAdam Step 3 | 0-10V TRIAC/ELV * | INCL*** | UGR <19 | 38°




		P	Psystem	CCT	I(led)	Flux
BLACK FOSTER Surface 15 UL	U320-6- ◎ -10- | WT | NT | WTMG | NTMG |	31.5W	37W	2700K	700mA	2850Lm
	U320-6- ◎ -11- | WT | NT | WTMG | NTMG |	31.5W	37W	3000K	700mA	3150Lm
	U320-6- ◎ -12- | WT | NT | WTMG | NTMG |	31.5W	37W	4000K	700mA	3750Lm

120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

Junction Box Cover INCL Ø 4.33 in (110 mm) | MacAdam Step 3 | 0-10V TRIAC/ELV * | INCL*** | UGR <19 | 38°

◎	BEAM	LOR
0	38°	92%
1	19°	90%

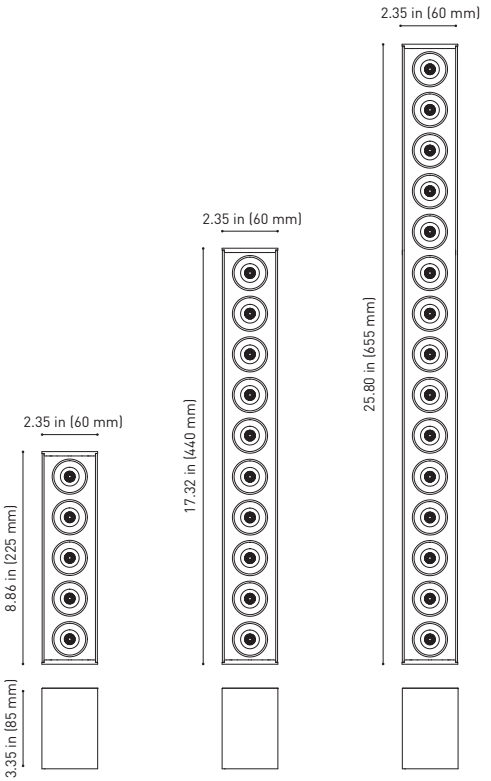

FINISHING	Lamp	Cover Disc
	WT ☐	WT ☐
	NT ■	WT ☐
	WTMG ☐■	WT ☐
	NTMG ■■	WT ☐

COLOR | WT ☐ | NT ■ | NTMG ■■ | WTMG ☐■ | MATERIAL | AL | ABS+PC | RAL ⓘ » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER CCT & FINISHING COMBINATIONS PLEASE CONSULT
*TRIAC OR TRIAC/ELV DIMMING ONLY AT 120Vac., OTHER DIM PLEASE CONSULT
**BLACK FOSTER SURF 5: DRIVER APS L9WCD SERIES OR SIMILAR
***BLACK FOSTER SURF 10&15: DRIVER ERP-PSB SERIES OR SIMILAR



Power Electronics · Offices, Valencia (Spain) | Design: Francesc Rifé Studio | Photography: David Zarzoso

archiproducts
DESIGN AWARDS
WINNER 2018

2020 HONORABLE MENTION
EUROPEAN PRODUCT DESIGN AWARD

TOP




		CCT	Beam	LOR
TOP UL	U295-01-10- | WT | NT |	2700K	20°	92%
	U295-01-11- | WT | NT |	3000K	20°	92%
	U295-01-12- | WT | NT |	4000K	20°	92%
	U295-01-20- | WT | NT |	2700K	30°	89%
	U295-01-21- | WT | NT |	3000K	30°	89%
	U295-01-22- | WT | NT |	4000K	30°	89%
	U295-01-30- | WT | NT |	2700K	56°	86%
	U295-01-31- | WT | NT |	3000K	56°	86%
	U295-01-32- | WT | NT |	4000K	56°	86%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

Junction Box Cover INCL Ø 5.51in (140 mm) | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | UGR <19 | 20° / 30° / 56°

FINISHING	Lamp	Cover Disc
	WT ☐	WT ☐
	NT ■	WT ☐

TOP UL



ACCESSORIES


AFFECTS THE LIGHTING PARAMETERS | NOT SOLD SEPARATELY

TOP UL **Beam Mixer Diffuser** **0805-01-00**



TOP UL **Anti-glare Honeycomb Louver** **0807-00-00 | WT | NT |**





DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-35	4.5W	6W	500mA	2700K	480Lm	1 to 5
				3000K	500Lm	
				4000K	515Lm	
U100-00-36	6.5W	8.5W	700mA	2700K	610Lm	1 to 5
				3000K	640Lm	
				4000K	655Lm	

120-277 V | 50/60 Hz | Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	500-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | WT ☐ | NT ■ | MATERIAL | AL | PC | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT




		CCT	Beam	LOR
TOP Mini UL	U296-01-10- | WT | NT |	2700K	20°	92%
	U296-01-11- | WT | NT |	3000K	20°	92%
	U296-01-12- | WT | NT |	4000K	20°	92%
	U296-01-20- | WT | NT |	2700K	30°	89%
	U296-01-21- | WT | NT |	3000K	30°	89%
	U296-01-22- | WT | NT |	4000K	30°	89%
	U296-01-30- | WT | NT |	2700K	56°	86%
	U296-01-31- | WT | NT |	3000K	56°	86%
	U296-01-32- | WT | NT |	4000K	56°	86%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

Junction Box Cover INCL Ø 5.51in (140 mm) | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | UGR <19 | 20° / 30° / 56°

FINISHING	Lamp	Cover Disc
	WT ☐	WT ☐
	NT ■	WT ☐

TOP MINI UL



ACCESSORIES


AFFECTS THE LIGHTING PARAMETERS | NOT SOLD SEPARATELY

TOP UL Beam Mixer Diffuser 0805-01-00



TOP UL Anti-glare Honeycomb Louver 0807-00-00 | WT | NT |





DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-35	4.5W	6W	500mA	2700K	480Lm	1 to 5
				3000K	500Lm	
				4000K	515Lm	
U100-00-36	6.5W	8.5W	700mA	2700K	610Lm	1 to 5
				3000K	640Lm	
				4000K	655Lm	


120-277 V | 50/60 Hz | Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	500-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | WT ☐ | NT ■ | MATERIAL | AL | PC | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT

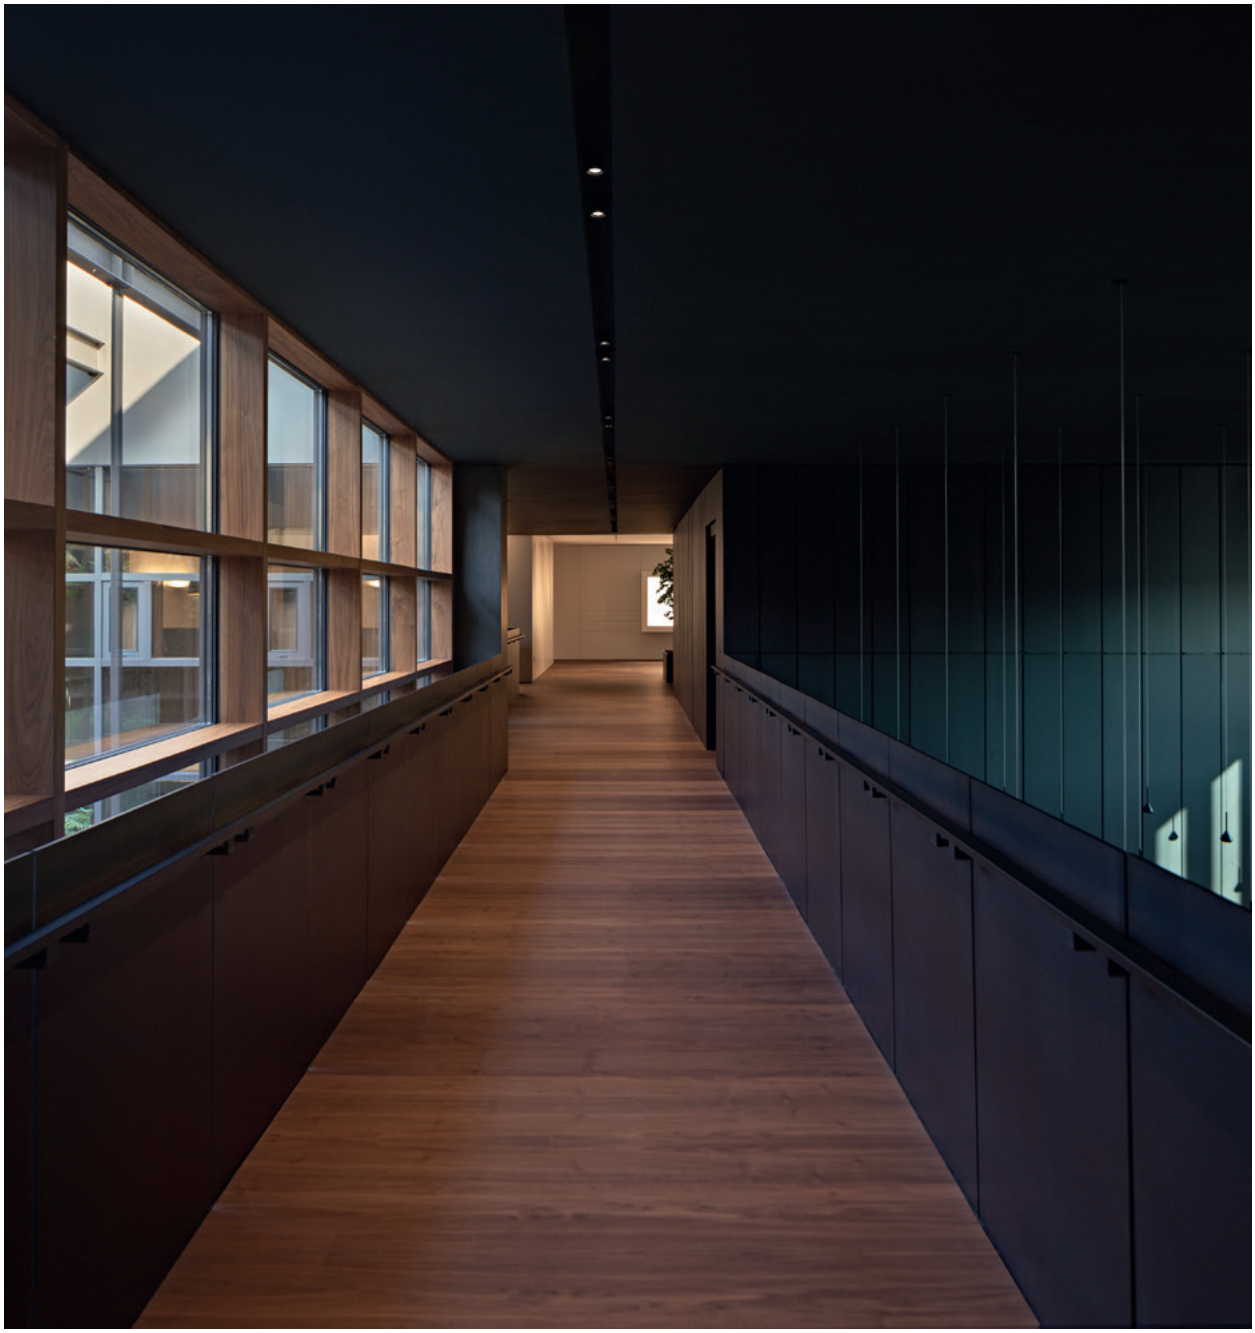

Arkoslight Headquarters, Valencia (Spain) | Design: Francesc Rifé Studio & Victor García Martínez . Arquitecto | Photography: David Zarzoso



ICONIC AWARDS 2017
INTERIOR INNOVATION
winner


PUCK



		CCT	LOR
PUCK M UL	U251-10-00- | WT | NT | MC | MG |	2700K	80%
	U251-10-01- | WT | NT | MC | MG |	3000K	80%
	U251-10-02- | WT | NT | MC | MG |	4000K	80%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

Junction Box Cover INCL Ø 4.33 in (110 mm) | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | UGR <19 | 45°



DRIVER OPTIONS *
REMOTE BOX-CASE L

	Reference	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
PUCK M UL	U100-01-16	9W	11.5W	500mA	2700K	1040Lm	1 to 2
					3000K	1080Lm	
					4000K	1100Lm	

120-277 V | 50/60 Hz | Intertek

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE
PHASE CUT DIM PLEASE CONSULT


0-10 V | INCL

DISTANCE LED-DRIVER

AWG	350mA	700mA
18	447 ft	224 ft
16	711 ft	356 ft
14	1132 ft	566 ft

FINISHING	Lamp	Cover Disc
	WT ☐	WT ☐
	NT ■	WT ☐
	MC ■	WT ☐
	MG ■	WT ☐

PUCK M



COLOR | WT ☐ | NT ■ | MC ■ | MG ■ | MATERIAL | AL | OPTICAL GLASS | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
*DRIVER: UNIVERSAL LIGHTING TECHNOLOGIES OR SIMILAR | OTHER CCT PLEASE CONSULT






		CCT	LOR
PUCK L UL	U251-20-00- | WT | NT | MC | MG |	2700K	82%
	U251-20-01- | WT | NT | MC | MG |	3000K	82%
	U251-20-02- | WT | NT | MC | MG |	4000K	82%

Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

Junction Box Cover INCL Ø 4.33 in (110 mm) | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | UGR <19 | 47°



DRIVER OPTIONS *
REMOTE BOX-CASE S

		P	Psystem	I(led)	CCT	Flux	Nº Luminaires
PUCK L UL	U100-01-17	12W	13W	350mA	2700K	1550Lm	1
					3000K	1610Lm	
					4000K	1640Lm	


120-277 V | 50/60 Hz | Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	350mA	700mA
18	447 ft	224 ft
16	711 ft	356 ft
14	1132 ft	566 ft

FINISHING	Lamp	Cover Disc
	WT ☐	WT ☐
	NT ■	WT ☐
	MC ■	WT ☐
	MG ■	WT ☐

PUCK L



COLOR | WT ☐ | NT ■ | MC ■ | MG ■ | MATERIAL | AL | OPTICAL GLASS | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
*DRIVER: DRIVER APS L6W SERIES OR SIMILAR | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT



Casa MAX 12 · Private residence, Valencia (Spain) | Interior design: DG Arquitecto Valencia | Photography: Mariela Apollonio

A'DESIGN AWARD
WINNER 2015
S I L V E R

SKY




			P	P	CCT	I(led)	Flux	LOR
SKY 1 UL	U195-01-11-	WT	18.5W	21W	3000K	425mA	2950Lm	81%
	U195-01-12-	WT	18.5W	21W	4000K	425mA	2980Lm	81%
SKY 2 UL	U195-02-11-	WT	38W	43W	3000K	850mA	5525Lm	81%
	U195-02-12-	WT	38W	43W	4000K	850mA	5610Lm	81%

120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2 | 0-10V TRIAC/ELV ** | INCL* | 105°

SKY UL



COLOR | WT ☐ | MATERIAL | AL | PMMA | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER CCT PLEASE CONSULT
* DRIVER: ERP-PSB SERIES OR SIMILAR
** TRIAC/ELV DIMMING ONLY AT 120Vac., OTHER DIM PLEASE CONSULT



Balaguer Advisory offices, Valencia (Barcelona) | Design: Espai Asimètric | Photography: Alejandro Gómez Vives - Fotografía de Arquitectura

STRAM SURFACE




			P	Psystem	CCT	I(led)	Flux	LOR
STRAM SURFACE **1 UL**	**U246-01-10-**	**WT** | **NT**	12W	14W	2700K	400mA	1720Lm	87%
	U246-01-11-	**WT** | **NT**	12W	14W	3000K	400mA	1855Lm	87%
	U246-01-12-	**WT** | **NT**	12W	14W	4000K	400mA	1885Lm	87%
STRAM SURFACE **2 UL**	**U246-02-10-**	**WT** | **NT**	22W	25W	2700K	700mA	2800Lm	87%
	U246-02-11-	**WT** | **NT**	22W	25W	3000K	700mA	3025Lm	87%
	U246-02-12-	**WT** | **NT**	22W	25W	4000K	700mA	3075Lm	87%

120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000h

MacAdam Step 2 | 0-10V TRIAC/ELV ** | INCL* | 99°



STRAM SURFACE UL



COLOR | **WT** □ | **NT** ■ | MATERIAL | **AL** | **PMMA** | RAL » 146

PRISMATIC DIFFUSER PLEASE CONSULT | PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER CCT PLEASE CONSULT | COLORS MAY AFFECT THE LIGHTING PARAMETERS
* DRIVER: ERP-PSB SERIES OR SIMILAR ** TRIAC/ELV DIMMING ONLY AT 120Vac., OTHER DIM PLEASE CONSULT



Private residence · Dúplex en el Golf, Alicante (Spain) | Design: nuel García Asociados | Photography: Diego Opazo Fotografía

GOOD DESIGN

DESIGN AWARD 2017

PREMIO ADCV 2017 ORO

Silver Delta ADI Awards 2016

iO SURFACE




		CCT	Beam	LOR
iO Surface UL	U263-01-10- | WT | NT |	2700K	20°	92%
	U263-01-11- | WT | NT |	3000K	20°	92%
	U263-01-12- | WT | NT |	4000K	20°	92%
	U263-01-20- | WT | NT |	2700K	30°	89%
	U263-01-21- | WT | NT |	3000K	30°	89%
	U263-01-22- | WT | NT |	4000K	30°	89%
	U263-01-30- | WT | NT |	2700K	56°	86%
	U263-01-31- | WT | NT |	3000K	56°	86%
	U263-01-32- | WT | NT |	4000K	56°	86%

Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h | Junction Box Cover INCL Ø 5.51in (140 mm) | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | 355° | 325° | 20° / 30° / 56°

FINISHING	Lamp	Cover Disc
	WT ☐	WT ☐
	NT ■	WT ☐

iO SURFACE UL

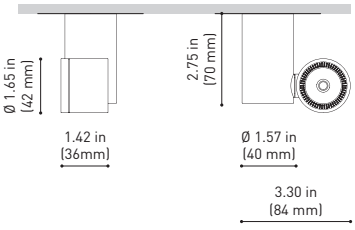

ACCESSORIES


AFFECTS THE LIGHTING PARAMETERS | NOT SOLD SEPARATELY

iO UL Beam Mixer Diffuser 0805-01-00



iO UL Anti-glare Honeycomb Louver 0806-00-00 | WT | NT |





DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-35	4.5W	6W	500mA	2700K	485Lm	1 to 5
				3000K	505Lm	
				4000K	520Lm	

120-277 V | 50/60 Hz | Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL

DISTANCE LED-DRIVER

AWG	500-700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | WT ☐ | NT ■ | MATERIAL | AL | PC | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT



Dental clinic Micó & Martinez, Burjassot (Spain) | Design: Ximo Roca | Photography: Héctor Rubio · Images Positive

product design award 2014

DELTA AWARDS 2013 Selection

A'DESIGN AWARD WINNER 2014 BRONZE

bid_14

ZEN TUBE SURFACE



		P	Psystem	CCT	I(led)	Flux	LOR
ZEN TUBE Surface 1 UL	U284-11- ◎ -1- | WT | NT |	12W	14W	3000K	350mA	1640Lm	90%
	U284-11- ◎ -2- | WT | NT |	12W	14W	4000K	350mA	1670Lm	90%
ZEN TUBE Surface 2 UL	U284-12- ◎ -1- | WT | NT |	17W	20W	3000K	500mA	2220Lm	90%
	U284-12- ◎ -2- | WT | NT |	17W	20W	4000K	500mA	2250Lm	90%
ZEN TUBE Surface 3 UL	U284-13- ◎ -1- | WT | NT |	23W	27W	3000K	700mA	3190Lm	90%
	U284-13- ◎ -2- | WT | NT |	23W	27W	4000K	700mA	3240Lm	90%

120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

Junction Box Cover INCL Ø 5.51 in (140 mm) | MacAdam Step 2 | 0-10V TRIAC/ELV ** | INCL* | 355° | 270° | 16° / 24° / 42°

◎	BEAM OPTIONS
1	16°
2	24°
3	42°

FINISHING	Lamp	Cover Disc
	WT ☐	WT ☐
	NT ■	WT ☐

ACCESSORIES

AFFECTS THE LIGHTING PARAMETERS | NOT SOLD SEPARATELY

ZEN UL **Anti-glare Honeycomb Louver** 0702-02-00




ZEN UL **Elliptical Refractor** 0700-08-00



ZEN UL **Beam Mixer Diffuser** 0805-02-00



ZEN TUBE SURFACE UL



COLOR | WT ☐ | NT ■ | MATERIAL | AL | GL-TRANS | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER CCT & FINISHING COMBINATIONS PLEASE CONSULT
*DRIVER: ERP-PSB SERIES OR SIMILAR
**TRIAC/ELV DIMMING ONLY AT 120Vac., OTHER DIM PLEASE CONSULT



Arkoslight Headquarters. Valencia (Spain) | Design: Francesc Rifé Studio | Architect: Víctor García Martínez Arquitecto | Photography: David Zarzoso · Fotografía de arquitectura

reddot design award
winner 2019

archiproducts
DESIGN AWARDS
—
WINNER 2019

Delta
ADI Awards 2020

FX INTERIOR DESIGN AWARDS INTERNATIONAL

PREMIO
ADCV 2019
PLATA

THE
INVISIBLE
BLACK


ART



		CCT	LOR
ART UL Direct & Indirect	U343-00-10- | WT | NT | BC | BG |	2700K	92%
	U343-00-11- | WT | NT | BC | BG |	3000K	92%

Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h | Junction Box Cover INCL Ø 5.51in (140 mm) | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | UGR <19 | 38°


ART DIRECT & INDIRECT UL

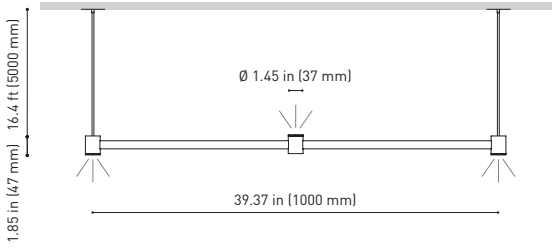

FINISHING	Lamp	Cover Disc
	WT □	WT □
	NT ■	NT ■
	BC ■	WT □
	BG ■	WT □

DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-36	6.3W	8W	700mA	2700K	570Lm	1 to 2
				3000K	630Lm	

120-277 V | 50/60 Hz | Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL



DISTANCE LED-DRIVER

AWG	700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | WT □ | NT ■ | BC ■ | BG ■ | MATERIAL | BR | ABS +PC | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT






		CCT	LOR
ART UL	U342-00-10- | WT | NT | BC | BG |	2700K	92%
	U342-00-11- | WT | NT | BC | BG |	3000K	92%

Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h | Junction Box Cover INCL Ø 5.51in (140 mm) | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | UGR <19 | 38°


ART UL

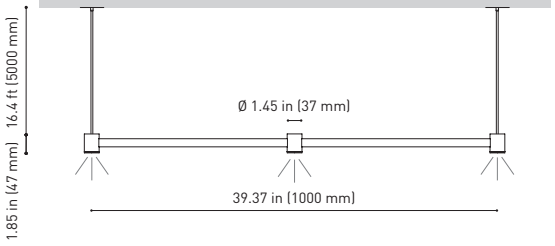

FINISHING	Lamp	Cover Disc
	WT □	WT □
	NT ■	NT ■
	BC ■	WT □
	BG ■	WT □

DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-36	6.3W	8W	700mA	2700K	570Lm	1 to 2
				3000K	630Lm	

120-277 V | 50/60 Hz | Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL



DISTANCE LED-DRIVER

AWG	700mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | WT □ | NT ■ | BC ■ | BG ■ | MATERIAL | BR | ABS + PC | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT



Arkoslight Stand, Light + Building 2018, Frankfurt (Germany) | Design: Francesc Rifé Studio | Photography: David Zarzoso · Fotografía de arquitectura

HOLLY


		CCT	Beam	LOR
HOLLY UL	U281- ⓪ -0-00- | WT | NT | MC | MG |	2700K	19°	90%
	U281- ⓪ -0-01- | WT | NT | MC | MG |	3000K	19°	90%
	U281- ⓪ -0-10- | WT | NT | MC | MG |	2700K	38°	92%
	U281- ⓪ -0-11- | WT | NT | MC | MG |	3000K	38°	92%

ETL Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h


Junction Box Cover INCL Ø 5.51in (140 mm) | MacAdam Step 3 | REQUIRED REMOTE DRIVER* | 19° / 38°

⓪	CORD LENGTH - L
0	6.55 ft (2 m)
1	9.85 ft (3 m)
2	16.4 ft (5 m)

HOLLY UL

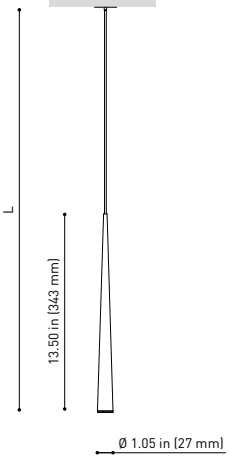

HOLLY UL + CORD ACCESSORY

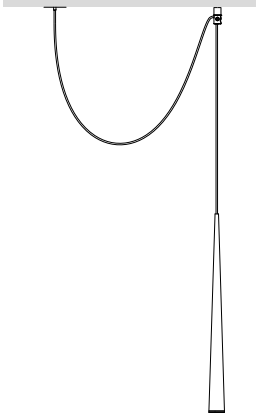


FINISHING	Lamp	Cover Disc
	WT ☐	WT ☐
	NT ■	NT ■
	MC ■	NT ■
	MG ■	NT ■

OPTIONAL ACCESSORY


CORD Accessory UL

U223-00-00- | W | N |



DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-36	2.1W	3.8W	700mA	2700K	190Lm	1 to 3
				3000K	210Lm	

120-277 V | 50/60 Hz | ETL Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL



DISTANCE LED-DRIVER

AWG	00mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | WT ☐ | NT ■ | MC ■ | MG ■ | MATERIAL | AL | ABS | RAL ⓘ » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT



A'DESIGN AWARD
WINNER 2015
GOLD

GERMAN
DESIGN
AWARD
NOMINEE
2016

ICONIC AWARDS 2016
INTERIOR INNOVATION
winner

SPIN




		CCT	Beam	LOR
SPIN UL	U222- ⓪ -2-00- | WT | NT | MC | MG |	2700K	24°	86%
	U222- ⓪ -2-01- | WT | NT | MC | MG |	3000K	24°	86%
	U222- ⓪ -2-02- | WT | NT | MC | MG |	4000K	24°	86%
	U222- ⓪ -2-10- | WT | NT | MC | MG |	2700K	40°	84%
	U222- ⓪ -2-11- | WT | NT | MC | MG |	3000K	40°	84%
	U222- ⓪ -2-12- | WT | NT | MC | MG |	4000K	40°	84%

Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h


Junction Box Cover INCL Ø 5.51in (140 mm) | MacAdam Step 2 | REQUIRED REMOTE DRIVER* | 24°/ 40°

⓪	CORD LENGTH - L
0	6.55 ft (2 m)
1	9.85 ft (3 m)
2	16.4 ft (5 m)

SPIN UL

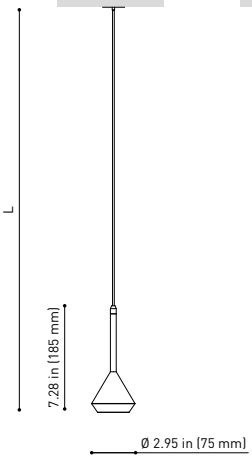

SPIN UL + CORD ACCESSORY

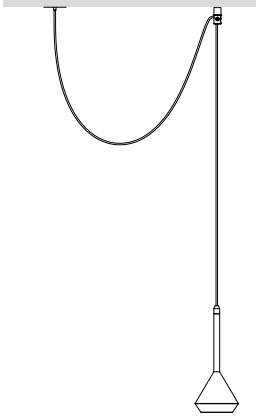


FINISHING	Lamp	Cover Disc
	WT □	WT □
	NT ■	NT ■
	MC ■	NT ■
	MG ■	NT ■

OPTIONAL ACCESSORY


CORD Accessory UL

U223-00-00- | W | N |



DRIVER OPTIONS * REMOTE BOX-CASE L	P	Psystem	I(led)	CCT	Flux	Nº Luminaires
U100-00-36	6.5W	7W	700mA	2700K	600Lm	1 to 3
				3000K	630Lm	
				4000K	680Lm	

120-277 V | 50/60 Hz | Intertek | SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED-DRIVER | RATINGS FOR ONE LUMINAIRE | 0-10 V | INCL



DISTANCE LED-DRIVER

AWG	00mA
18	34 ft
16	53 ft
14	85 ft
12	100 ft

COLOR | WT □ | NT ■ | MC ■ | MG ■ | MATERIAL | AL | PMMA | RAL ⓘ » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
*DRIVER: MAGNITUDE LIGHTING AFLEX | OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT



Caves Carriere Winery, Fontaine-lés Dijon |France| | Design: Godart + Roussel Architectes | Photography: Jonas Jacquel

DESIGN AWARD 2015

GERMAN DESIGN AWARD NOMINEE 2016

SALT



		P	Psystem	CCT	I(led)	Flux	LOR
SALT 1 UL	U220-01-11- | WW | WG | WR | NW | NG | NR |	23W	27W	3000K	600mA	3545Lm	66%
	U220-01-12- | WW | WG | WR | NW | NG | NR |	23W	27W	4000K	600mA	3600Lm	66%
SALT 2 UL	U220-02-11- | WW | WG | WR | NW | NG | NR |	35W	38W	3000K	900mA	5125Lm	66%
	U220-02-12- | WW | WG | WR | NW | NG | NR |	35W	38W	4000K	900mA	5225Lm	66%

120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

Junction Box Cover INCL Ø 5.51in (140 mm) | MacAdam Step 2 | 0-10V TRIAC/ELV ** | INCL* | 10 ft 3.05 m | FAST | 77°



WW



WG



WR



NW




NG



NR

COLORS MAY AFFECT THE LIGHTING PARAMETERS

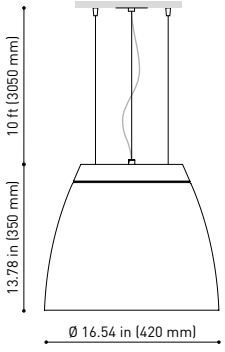

FINISHING	Lamp	Cover Disc
	WW	WT
	WG	WT
	WR	WT
	NW	NT
	NG	NT
	NR	NT

COLOR | WW | WG | WR | NW | NG | NR | MATERIAL | AL | PMMA | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
* DRIVER: ERP-PSB SERIES OR SIMILAR
** TRIAC/ELV DIMMING ONLY AT 120Vac.,OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT



BRIGIT



			P	Psystem	CCT	I(led)	Flux	LOR
BRIGIT UL	U900-60-01-	W	27W	30W	3000K	700mA	4100Lm	88%
	U900-60-02-	W	27W	30W	4000K	700mA	4175Lm	88%
	U900-60-01-	O	27W	30W	3000K	700mA	4100Lm	42%
	U900-60-02-	O	27W	30W	4000K	700mA	4175Lm	42%
	U900-60-01-	R	27W	30W	3000K	700mA	4100Lm	30%
	U900-60-02-	R	27W	30W	4000K	700mA	4175Lm	30%

120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h

Junction Box Cover INCL Ø 5.51in (140 mm) | MacAdam Step 2 | 0-10V TRIAC/ELV ** | INCL* | 10 ft 3.05 m | FAST




BRIGIT UL White



BRIGIT UL Orange



BRIGIT UL Red

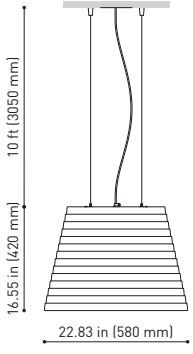

FINISHING	Lamp	Cover Disc
	W ☐	WT ☐
	O ■	WT ☐
	R ■	WT ☐

COLOR | W ☐ | O ■ | R ■ | MATERIAL | PE | PC | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
* DRIVER: ERP-PSB SERIES OR SIMILAR
** TRIAC/ELV DIMMING ONLY AT 120Vac., OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT



Photography: Héctor Rubio · Images Positive

DESIGN AWARD 2019

BESTofyear HONOREE 2019 INTERIOR DESIGN

THE INVISIBLE BLACK

BLACK FOSTER SUSPENSION



		P	Psystem	CCT	I(led)	Flux
BLACK FOSTER Suspension 1200 UL	U321-1- ○ - ◎ -0- | WT | NT | WTMG | NTMG |	21W	24W	2700K	700mA	1900Lm
	U321-1- ○ - ◎ -1- | WT | NT | WTMG | NTMG |	21W	24W	3000K	700mA	2100Lm
	U321-1- ○ - ◎ -2- | WT | NT | WTMG | NTMG |	21W	24W	4000K	700mA	2500Lm
BLACK FOSTER Suspension 1600 UL	U321-2- ○ - ◎ -0- | WT | NT | WTMG | NTMG |	31.5W	37W	2700K	700mA	2850Lm
	U321-2- ○ - ◎ -1- | WT | NT | WTMG | NTMG |	31.5W	37W	3000K	700mA	3150Lm
	U321-2- ○ - ◎ -2- | WT | NT | WTMG | NTMG |	31.5W	37W	4000K	700mA	3750Lm

120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 > 60.000 h


Junction Box Cover INCL Ø 5.51in (140 mm) | MacAdam Step 3 | OPTIONS** | INCL* | 10 ft 3.05 m | FAST | UGR <19 | 38°

○	BEAM	LOR
0	38°	92%
1	19°	90%


◎	OPTIONS**
1	DIM 0-10V/TRIAC/ELV
5	DIM On Board

FINISHING	Lamp	Cover Disc
	WT □	WT □
	NT ■	NT ■
	WTMG □■	WT □
	NTMG ■■	NT ■

BLACK FOSTER SUSPENSION 1200

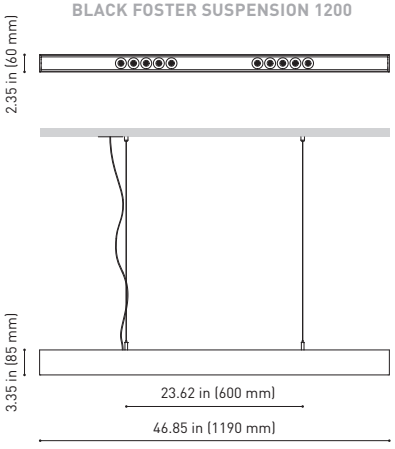


BLACK FOSTER SUSPENSION 1600

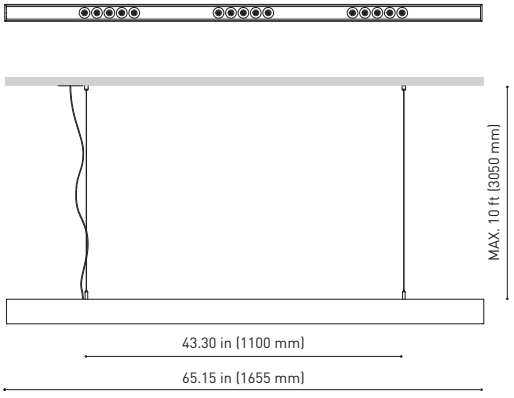

COLOR | WT □ | NT ■ | WTMG □■ | NTMG ■■ | MATERIAL | AL | ABS+PC | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT
* DRIVER: ERP-PSB SERIES OR SIMILAR
** TRIAC/ELV DIMMING ONLY AT 120Vac.,OTHER DIM PLEASE CONSULT | OTHER CCT PLEASE CONSULT

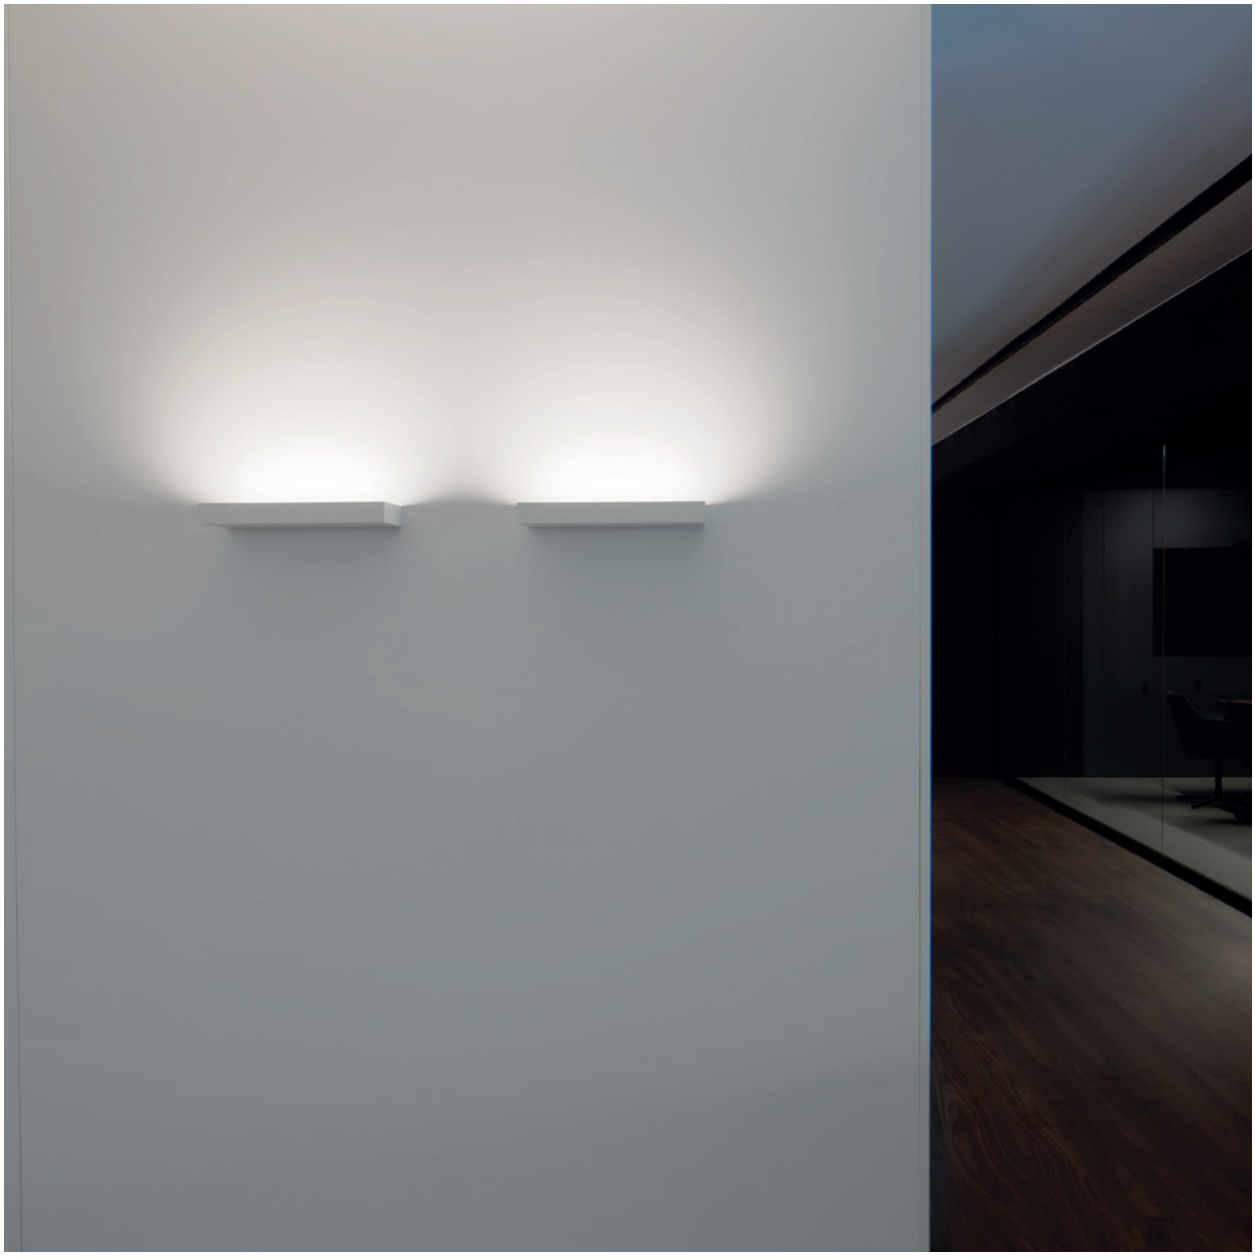

REC

		P	Psystem	CCT	I(led)	Flux	LOR
REC **UL**	**U256-00-10-** | **WT** | **NT** |	39.5W	45W	2700K	1000mA	5200Lm	85%
	U256-00-11- | **WT** | **NT** |	39.5W	45W	3000K	1000mA	5625Lm	85%
	U256-00-12- | **WT** | **NT** |	39.5W	45W	4000K	1000mA	5725Lm	85%

120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000h

Junction Box Cover INCL Ø 4.33 in (110 mm) | MacAdam Step 2 | 0-10V TRIAC/ELV ** | INCL*


		P	Psystem	CCT	I(led)	Flux	LOR
REC **Mini UL**	**U308-00-10-** | **WT** | **NT** |	20W	23W	2700K	700mA	2450Lm	75%
	U308-00-11- | **WT** | **NT** |	20W	23W	3000K	700mA	2650Lm	75%
	U308-00-12- | **WT** | **NT** |	20W	23W	4000K	700mA	2700Lm	75%

120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000h


Junction Box Cover INCL Ø 4.33 in (110 mm) | MacAdam Step 2 | 0-10V TRIAC/ELV ** | INCL*

FINISHING	Lamp	Cover Disc
	WT ☐	WT ☐
	NT ■	WT ☐

REC



REC MINI



COLOR | WT ☐ | NT ■ | MATERIAL | AL | PMMA | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT | OTHER CCT PLEASE CONSULT | COLORS MAY AFFECT THE LIGHTING PARAMETERS

* DRIVER: ERP-PSB SERIES OR SIMILAR | ** TRIAC/ELV DIMMING ONLY AT 120Vac.,OTHER DIM PLEASE CONSULT

		P	Psystem	CCT	I(led)	Flux	LOR
REC DOUBLE **UL**	**U309-00-10-** | **WT** | **NT** |	29.5W	34W	2700K	900mA	4150Lm	76%
	U309-00-11- | **WT** | **NT** |	29.5W	34W	3000K	900mA	4500Lm	76%
	U309-00-12- | **WT** | **NT** |	29.5W	34W	4000K	900mA	4560Lm	76%


120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h | Junction Box Cover INCL Ø 4.33 in (110 mm) | MacAdam Step 2 | 0-10V TRIAC/ELV ** | INCL*

		P	Psystem	CCT	I(led)	Flux	LOR
REC DOUBLE **Mini UL**	**U310-00-10-** | **WT** | **NT** |	16.5W	19.5W	2700K	500mA	2300Lm	72%
	U310-00-11- | **WT** | **NT** |	16.5W	19.5W	3000K	500mA	2500Lm	72%
	U310-00-12- | **WT** | **NT** |	16.5W	19.5W	4000K	500mA	2530Lm	72%


120/277 V | 50/60 Hz | Intertek | DAMP LOCATION | CRI>90 | L80B10 >60.000 h | Junction Box Cover INCL Ø 4.33 in (110 mm) | MacAdam Step 2 | 0-10V TRIAC/ELV ** | INCL*

FINISHING	Lamp	Cover Disc
	WT ☐	WT ☐
	NT ■	WT ☐

REC DOUBLE UL



REC DOUBLE MINI UL



COLOR | WT ☐ | NT ■ | MATERIAL | AL | PMMA | RAL » 146

PREPARED TO BE MOUNTED IN AN OCTOGONAL JUNCTION BOX | OTHER FINISHING COMBINATIONS PLEASE CONSULT | OTHER CCT PLEASE CONSULT | COLORS MAY AFFECT THE LIGHTING PARAMETERS
* DRIVER: ERP-PSB SERIES OR SIMILAR | ** TRIAC/ELV DIMMING ONLY AT 120VAC.,OTHER DIM PLEASE CONSULT



Photography: BISimages

COLORS

WT | Textured white
W | Matt white
WN | White - Black
NT | Textured black
N | Matt black
Z | Aluminium
BG | Brushed Gold
BC | Brushed Copper
MG | Metallized Gold
MC | Metallized Copper
G | Gold
O | Orange
WMG | White - Metallized Gold
WTMG | Textured white - Metallized Gold
NMG | Matt black - Metallized Gold
NTMG | Textured black - Metallized Gold
R | Red

The lighting values indicated for each ref. code correspond to the results obtained from the tests carried out on the first mentioned color of the list.

BLACK FOSTER
N = RAL 9005
NMG = RAL not available. Metallic finish
WN = Color in the mass looks alike RAL 9016 & RAL 9005
WT = RAL 9016
NT = RAL 9005
WTMG = RAL not available. Metallic finish
NTMG = RAL not available. Metallic finish

SHOT LIGHT
N = Color in the mass looks alike RAL 9005
NMG = RAL not available. Metallic finish
WMG = RAL not available. Metallic finish
W = Color in the mass looks alike RAL 9016

SWAP
W = Color in the mass looks alike RAL 9010
R = RAL 2004
G = RAL 1036
Z = RAL 9006
WN = Color in the mass looks alike RAL 9010 & RAL 9005
N = RAL 9005

LEX
W = RAL 9016
R = RAL 2004
G = RAL 1036
Z = RAL 9006
WN = RAL 9016 & RAL 9005
N = RAL 9005

DEEP
WT = RAL 9016

DROP
WT = RAL 9016

STRAM
WT = RAL 9016

MIX
W = RAL 9010
Z = RAL 9006

MADISON
W = RAL 9010
Z = RAL 9006

QUAD
W = RAL 9010
Z = RAL 9006

POP UP
WT = RAL 9016
NT = RAL 9005

TWIST
WT = RAL 9016
NT = RAL 9005

MINIMAL TRACK
N = RAL 9005

ALASKA 24V
N = RAL 9005

SIX XS 24V
WT = RAL 9016
NT = RAL 9005

PLUS MICRO 24V
WT = RAL 9016
NT = RAL 9005

IO MICRO 24V
WT = RAL 9016
NT = RAL 9005

FIT 24V
WT = RAL 9016
NT = RAL 9005
G = RAL not available. Paint of metallic nanoparticles

TOP MICRO 24V
WT = RAL 9016
NT = RAL 9005

LINE MICRO 24V
N = RAL 9005

SIX 48V
WT = RAL 9016
NT = RAL 9005

FIT 48V
WT = RAL 9016
NT = RAL 9005
G = RAL not available. Paint of metallic nanoparticles

PLUS 48V
WT = RAL 9016
NT = RAL 9005

IO 48V
WT = RAL 9016
NT = RAL 9005

LINE 48V
W = RAL 9016
N = RAL 9005

TRACK 48V
N = RAL 9005
NT = RAL 9005
W = RAL 9016
WT = RAL 9016

TOP
WT = RAL 9016
NT = RAL 9005

PUCK
WT = RAL 9016
NT = RAL 9005
MC = RAL not available. Electrolytic bath
MG = RAL not available. Electrolytic bath

SKY
WT = RAL 9016

STRAM SURFACE
WT = RAL 9016
NT = RAL 9005

IO SURFACE
WT = RAL 9016
NT = RAL 9005

ZEN TUBE SURFACE
WT = RAL 9016
NT = RAL 9005

ART
WT = RAL 9016
NT = RAL 9005
BC = RAL not available. Paint of metallic nanoparticles
BG = RAL not available. Paint of metallic nanoparticles

HOLLY
WT = RAL 9016
NT = RAL 9005
MC = RAL not available. Electrolytic bath
MG = RAL not available. Electrolytic bath

SPIN
WT = RAL 9016
NT = RAL 9005
MC = RAL not available. Electrolytic bath
MG = RAL not available. Electrolytic bath

SALT
WW = RAL 9016 & RAL 9016
WG = RAL 9016 & RAL 1036
WR = RAL 9016 & RAL 2004
NW = RAL 9005 & RAL 9016
NG = RAL 9005 & RAL 1036
NR = RAL 9005 & RAL 2004
TW = Transparent & RAL 9016
TN = Transparent & RAL 9005

BRIGIT
W = Color in the mass looks alike RAL 9016
O = Color in the mass looks alike RAL 2011
R = Color in the mass looks alike RAL 3031

REC
WT = RAL 9016
NT = RAL 9005

GLOSSARY

P	Power
Psystem	Power of the system
CCT	Color Temperature
I(led)	Current
Beam	Light beam angle
Flux	Gross luminous flux
AWG	American Wire Gauge
AL	Aluminium
PC	Polycarbonate
ABS	Acrylonitrile Butadiene Styrene
PMMA	Polymethyl methacrylate
PE	Polyethylene
GL	Glass
BR	Brass
TRANS	Transparent
LOR	Lumen Output Ratio. Ratio between the output flux of the luminaire and the output flux of the light source
CRI	Color rendering index
120/277 V	Power supply voltage 120/277V
120-277 V	Power supply voltage 120-277V
24 V	Power supply voltage 24Vdc
48 V	Power supply voltage 48Vdc
50/60 Hz	Frequency
	ETL - ETL Listed Mark
	Environmental Location

	Junction Box Cover
IC RATED	Insulated Contact Rated
	Chromatic stability: MacAdam Steps
	Dimmable
	Remote electronic control gear required
INCL	Electronic control gear included
	Fitting hole for recessed luminaires
	Squared fixture for round fitting holes
FAST | CONNEC	Fast connection
CABLE	Cable length
	Quick adjustment for cable suspension
	Rail Type
EXCL**	Trimless Accessory not included
	Elliptical refractor
	Honeycomb filter
	Beam Mixer Diffuser
	Instalation type and light beam direction
	UGR (Unified Glare Rating) Visual comfort
	Made of
	Optical glass
	Tilting angle
	Rotation angle
	Reflector
	Diffuser

JOKERLIGHT®

2750 NW 84th Ave · Doral · FL 33122 (USA)
info@jokerlight.com · www.jokerlight.com

5 Year WARRANTY*

DIALux
PREMIUM PARTNER

LIGHT&LIFE

SINCE 1984